COMTREND CORPORATION

CT-5611T
ADSL2+ Combo Router
User's Manual

Version A1.3, Sep 27, 2007

261070-006

Warning

- Before servicing or disassembling this equipment, always disconnect all power and telephone lines from the device.
- Use an appropriate power supply and a UL Listed telephone line cord. Specification of the power supply is clearly stated in Appendix B - Specifications.

Preface

This manual provides information to network administrators. It covers the installation, operation and applications of the ADSL2+ combo router.

The reader reading this manual is presumed to have a basic understanding of telecommunications. For product update, new product release, manual revision, software upgrade, technical support, etc., visit Comtrend Corporation at http://www.comtrend.com

This document is subject to change without notice.

Copyright

Copyright© 2007 Comtrend Corporation. All rights reserved. The information and messages contained herein are proprietary to Comtrend Corporation. No part of this document may be translated, transcribed, reproduced, in any form, or by any means without prior written permission by Comtrend Corporation.

Technical support

When you find the product out of service, or that it doesn't work properly, please contact technical support engineer for immediate servicing or email to INT-support@comtrend.com

Table of Contents

CHAPTER 1 INTRODUCTION 4

1.1 FEATURES 4
1.2 APPLICATION 5
1.3 FRONT PANEL LED INDICATORS 6

CHAPTER 2 INSTALLATION 8

2.1 HARDWARE INSTALLATION 8
2.2 USB DEVICE DRIVER AUTO-RUN INSTALLATION 9
2.3 USB DRIVER MANUAL INSTALLATION(64BIT OS) 12
2.4 UN-INSTALLING THE USB DRIVER 18

CHAPTER 3 LOGIN VIA THE WEB BROWSER 22

3.1 IP ADDRESS 22
3.2 LOGIN PROCEDURE 23
3.3 DEFAULT SETTINGS 25

CHAPTER 4 QUICK SETUP 26

4.1 WAN 27
4.2 STATISTICS 28
4.2.1 LAN Statistics 29
4.2.2 WAN Statistics 30
4.2.3 ATM statistics 31
4.2.4 ADSL Statistics 33
4.2.5 Route 35
4.2.6 ARP 35
4.2.7 DHCP 36

CHAPTER 5 QUICK SETUP 37

5.1 AUTO QUICK SETUP 38
5.2 MANUAL QUICK SETUP 38
5.2.1 PPP over ATM (PPPoA) and PPP over Ethernet (PPPoE) 40
5.2.2 MAC Encapsulation Routing (MER) 45
5.2.3 IP Over ATM 49
5.2.4 Bridging 53

CHAPTER 6 ADVANCED SETUP 55

6.1 WAN 56
6.2 LAN 57
6.3 NAT 59
6.3.1 Virtual Servers 59
6.3.2 Port Triggering 61
6.3.3 DMZ Host 63
6.3.4 ALG 64
6.4 SECURITY 65

6.4.1 IP Filtering *65*
6.4.2 Parental Control *68*
6.5 QUALITY OF SERVICE 69
6.6 ROUTING 71
6.6.1 Default Gateway *71*
6.6.2 Static Route *72*
6.7 DNS 73
6.7.1 DNS Server *73*
6.7.2 Dynamic DNS *73*
6.8 DSL 75
6.9 PORT MAPPING 76
6.10 CERTIFICATE 79
6.10.1 Local *79*
6.10.2 Trusted CA *81*
CHAPTER 7 DIAGNOSTICS 82
CHAPTER 8 MANAGEMENT 83
8.1 SETTINGS 83
8.1.1 Configuration Backup *84*
8.1.2 Tools – Update Settings *84*
8.1.3 Restore Default *85*
8.2 SYSTEM LOG 86
8.3 TR-069 CLIENT 88
8.4 INTERNET TIME 90
8.5 ACCESS CONTROL 90
8.5.1 Services *91*
8.5.2 Access IP Addresses *92*
8.5.3 Passwords *93*
8.6 UPDATE SOFTWARE 94
8.7 SAVE AND REBOOT 95
APPENDIX A: PIN ASSIGNMENTS 96
APPENDIX B: SPECIFICATIONS 97

Chapter 1 Introduction

The CT-5611T ADSL2+ compact and high performance combo router provides one 10/100 Ethernet Interface and one USB interface, offering ADSL connectivity at speeds of up to 24 Mbps. It also has full routing capabilities to segment/route IP protocol, and supports advanced security functions.

1.1 Features

- IP filtering
- SPI (Stateful Packet Inspection)
- DoS protection
- Static route
- Dynamic IP assignment
- NAT/PAT
- IGMP Proxy
- DHCP Server/Relay/Client
- DNS Proxy
- Auto PVC configuration
- Up to 8 VCs
- Web-based management Remote configuration and upgrade
- Configuration backup and restoration
- FTP/TFTP server
- TR-68
- TR-69

1.2 Application

The following diagram depicts the application of the CT-5611T.

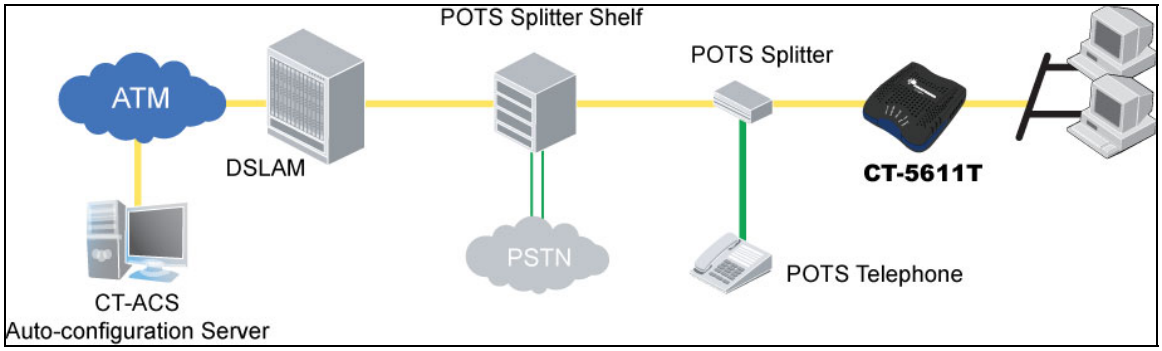

1.3 Front Panel LED Indicators

The front panel LEDs are shown in the picture below, followed by an explanation in the table below.

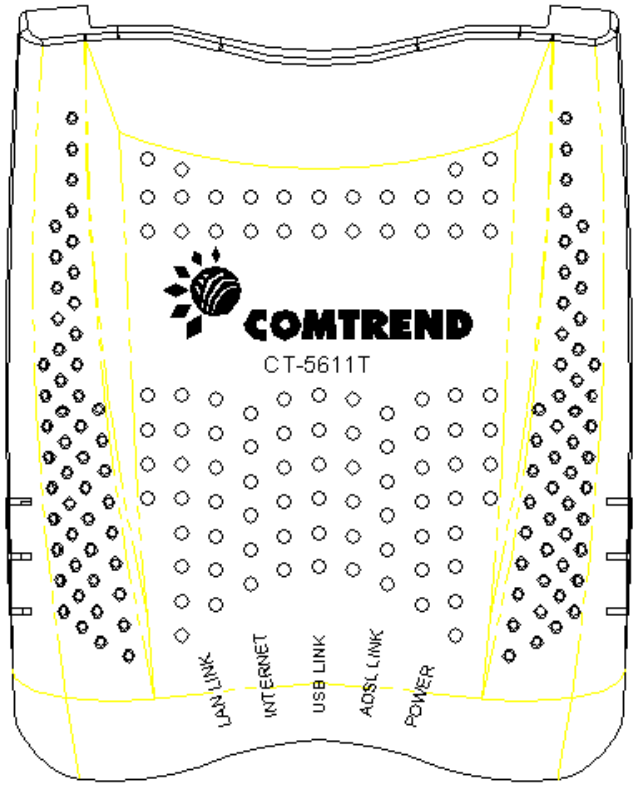

LED	Color	Mode	Function
POWER	Green	On	The router is powered up.
		Off	The router is powered down.
	Red	On	POST (Power On Self Test) fail (not bootable) or router failure which could be any error of internal sequence or state that will not allow the router to connect to the DSLAM, or send data.
ADSL LINK	Green	On	The ADSL link is established.
		Off	The ADSL link is not established.
	Green	Blink	The ADSL link is training or some traffic is passing through ADSL.

USB	Green	On	A USB link is established.
		Off	A USB link is not established.
	Green	Blink	Data transmitting or receiving over USB.
INTERNET	Green	On	Normal operating status.
		Off	The ADSL link is terminated.
	Green	Blink	Data transmitting or receiving over ADSL.
	Red	On	Device attempted to become IP connected and failed (no DHCP response, no PPPoE response, PPPoE authentication failed, no IP address from IPCP, etc.) For bridged mode, the indicator light is off. If the IP or PPPoE session is dropped due to an idle timeout, the light will remain green if an ADSL connection is still present. If the session is dropped for any other reason, the light is turned off. The light will turn red when it attempts to reconnect and DHCP or PPPoE fails.
LAN	Green	On	An Ethernet Link is established.
		Off	An Ethernet Link is not established.
	Green	Blink	Data transmitting or receiving over LAN.

Chapter 2 Installation

2.1 Hardware Installation

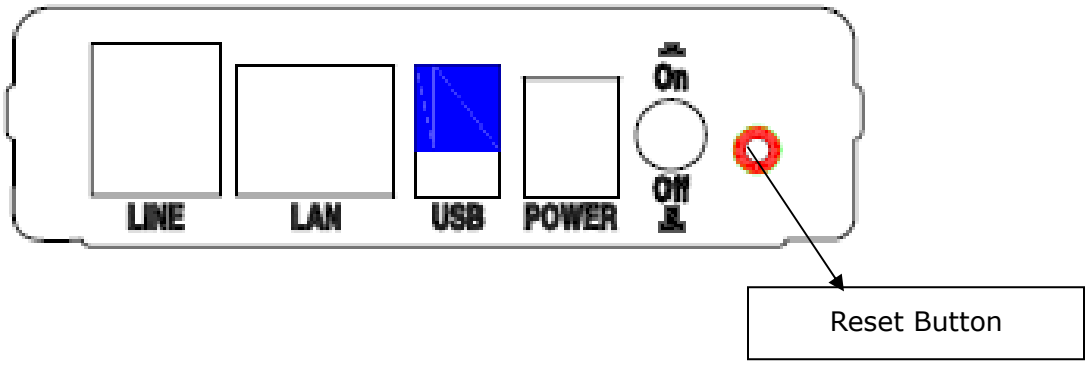

Follow the instructions below to complete the hardware connections.

Connection to LINE port

If you wish to connect both the router and a telephone, connect the LINE port to a POTS splitter with a RJ11 connection cable.

Connection to LAN port

To connect to a hub or PC, use a RJ45 cable. The port is auto-sensing MDI/X and either straight-through cable or crossover cable can be used.

Connection to USB port

Connect the USB port to a PC with a standard USB cable.

Connection to Power

Connect the **Power** jack to the shipped power cord. Attach the power adapter to the wall outlet or other AC source.

After all connections have been made, turn the power-switch to the on position. After powering on, the router performs a self-test. Wait for a few seconds until the test is finished, then the router will be ready to operate.

Reset Button

Restore the default parameters of the router by holding down the device's Reset button until the LED's start blinking simultaneously (about 5 seconds). After the device has rebooted successfully, and if the connection is established, the LAN LED, ADSL LED or USB LED will display in green, depending on the connection type.

Caution 1: If the router fails to power up, or it malfunctions, first verify that the power supply is connected correctly. Then power it on again. If the problem persists, contact our technical support engineers.

Caution 2: Before servicing or disassembling this equipment always disconnect all power cords and telephone lines from the wall outlet.

2.2 USB Device Driver Auto-run Installation

Before you connect your router's USB cable to your PC, you must load the ADSL USB drivers. The auto-run USB driver installation supports Win ME, Win 98, Win 2000, Win XP (32 bit) and Vista (32 bit). For those using Windows XP 64 bit, the driver needs to be installed manually (please see section 2.3 below for details), and the driver is also enclosed on the CD-ROM.

To connect the router to a PC using the USB interface, you need to use a standard USB cable and install the USB interface software. Follow the steps below:

STEP 1: Insert the Installation disk and the following screen will be displayed. Click the **Next** button to continue.

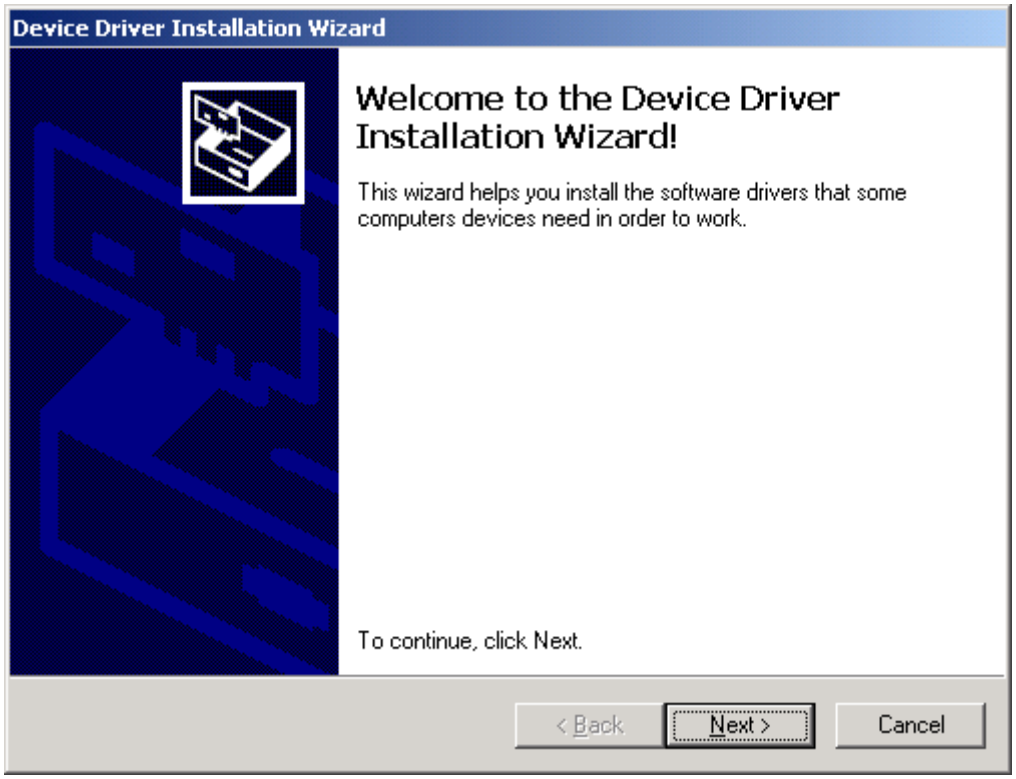
Device Driver Installation Wizard
Welcome to the Device Driver Installation Wizard!
This wizard helps you install the software drivers that some computers devices need in order to work.
To continue, click Next.
< Back
Next >
Cancel

STEP 2: When the screen displays as below, wait until the drivers are fully installed.

Device Driver Installation Wizard
The drivers are now installing...
Please wait while the drivers install. This may take some time to complete.
< Back
Next >
Cancel

STEP 3: Click the **Finish** button, when the screen displays as below.

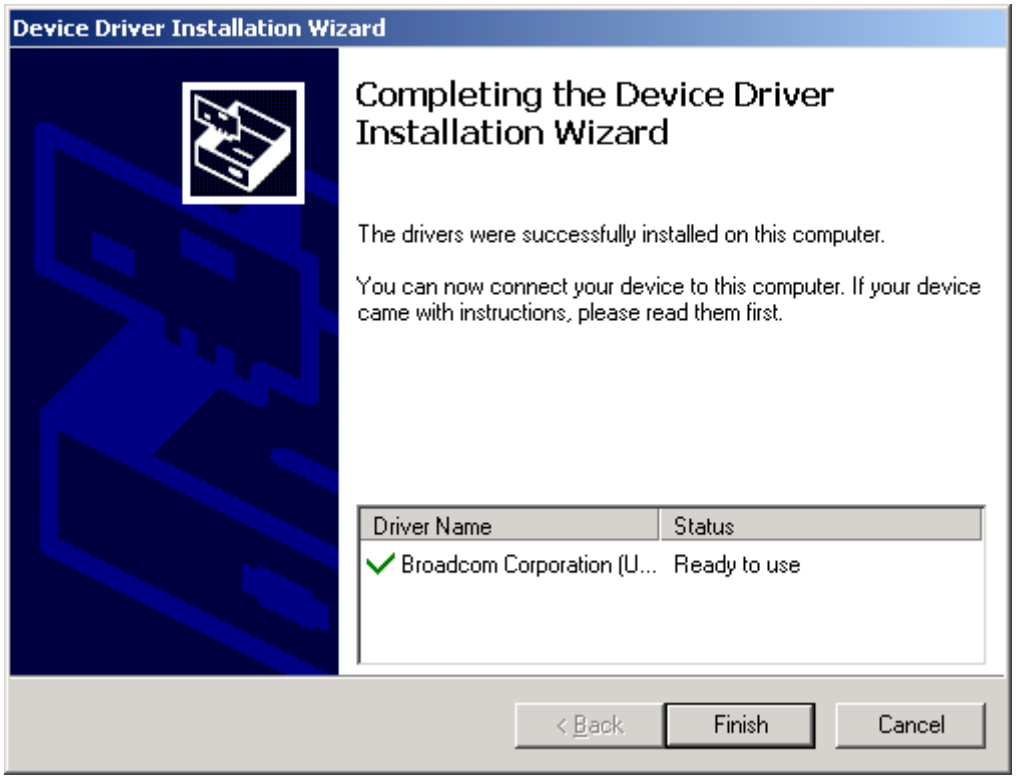
Device Driver Installation Wizard
Completing the Device Driver Installation Wizard
The drivers were successfully installed on this computer.
You can now connect your device to this computer. If your device came with instructions, please read them first.
Driver Name
Status
Broadcom Corporation (U...
Ready to use
< Back
Finish
Cancel

STEP 4: Installation is complete.

2.3 USB Driver Manual Installation(64bit OS)

Before you connect your router's USB cable to your PC, you must load the ADSL USB drivers. This manual USB driver installation supports Windows XP 64 bit.

To connect the router to a PC using the USB interface, you need to use a standard USB cable and install the USB interface software. Follow the steps below:

STEP 1: Connect the USB router to the PC by plugging the flat connector of a standard USB cable into your PC, and plugging the square connector into the router. The screen will display as below:

STEP 2: When the screen displays as below, select **install from a list of specific location (Advanced)** and click the **Next** button.

Found New Hardware Wizard
Welcome to the Found New Hardware Wizard
This wizard helps you install software for:
USB Network Interface
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

Note: This screen won't be displayed if the USB Driver has been previously un/installed.

STEP 3: If you are installing the software from a disk, insert the disk.

Found New Hardware Wizard
Please choose your search and installation options.
Search for the best driver in these locations.
Use the check boxes below to limit or expand the default search, which includes local paths and removable media. The best driver found will be installed.
Search removable media (floppy, CD-ROM...)
Include this location in the search:
Browse
Don't search. I will choose the driver to install.
Choose this option to select the device driver from a list. Windows does not guarantee that the driver you choose will be the best match for your hardware.
< Back
Next >
Cancel

STEP 4: Select the location of the file using the **Browse** button. Normally, the file is on the CD-ROM shipped with the device.

STEP 5: Locate the **Vista** folder, and click the **OK** button.

STEP 6: When the screen displays as below, click the **NEXT** button.

Found New Hardware Wizard
Please choose your search and installation options.
Search for the best driver in these locations.
Use the check boxes below to limit or expand the default search, which includes local paths and removable media. The best driver found will be installed.
Search removable media (floppy, CD-ROM...)
Include this location in the search:
E:\Vista
Browse
Don't search. I will choose the driver to install.
Choose this option to select the device driver from a list. Windows does not guarantee that the driver you choose will be the best match for your hardware.
< Back
Next >
Cancel

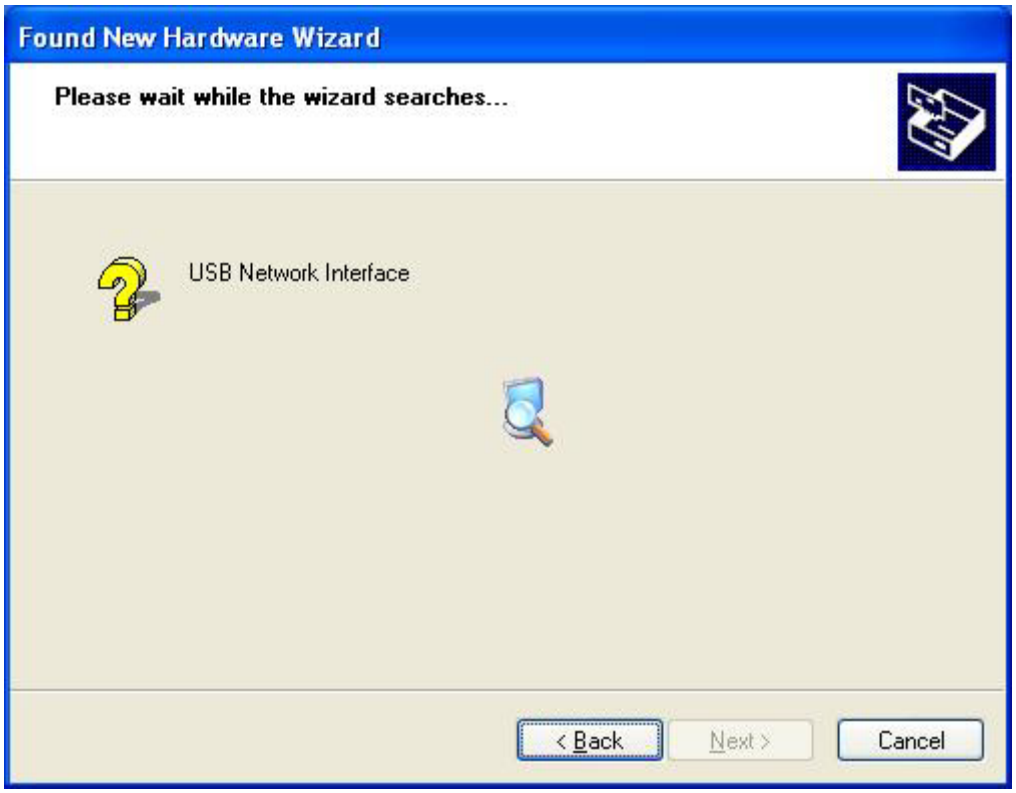

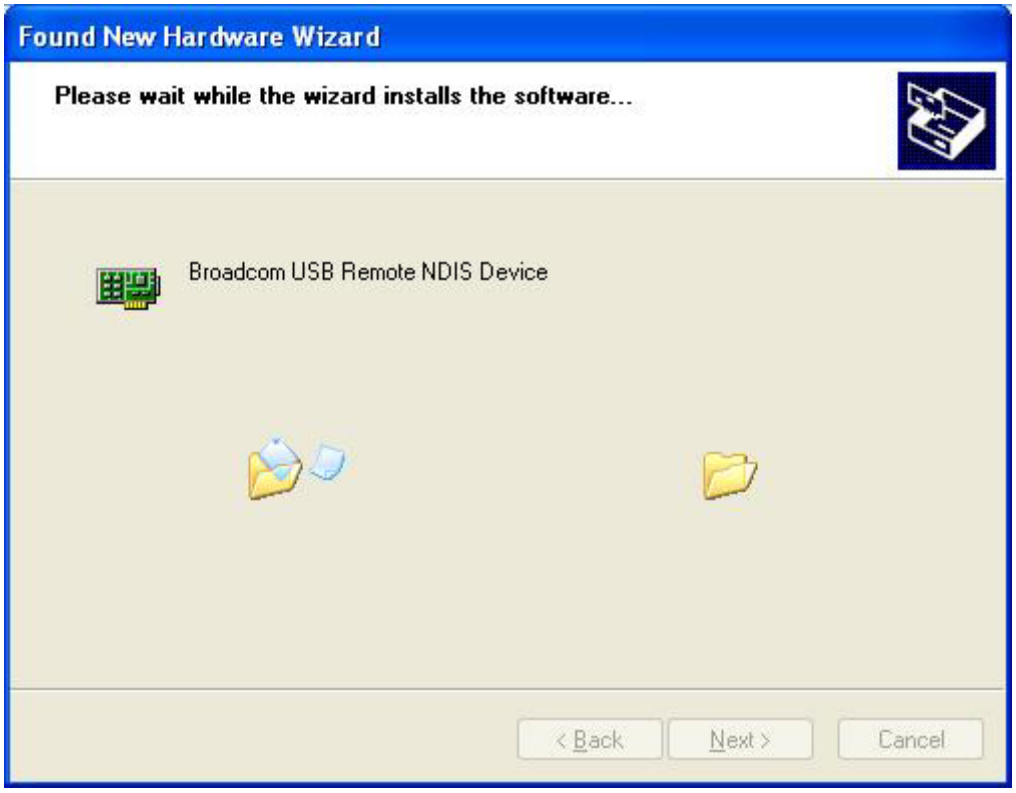

STEP 7: Click the **Finish** button, when the screen displays as below.

Found New Hardware Wizard
Completing the Found New Hardware Wizard
The wizard has finished installing the software for:
Broadcom USB Remote NDIS Device
Click Finish to close the wizard.
< Back
Finish
Cancel

STEP 8: Installation is complete.

2.4 Un-installing the USB Driver

STEP 1: Click **Start**, **Settings** and then **Control Panel** as shown here.

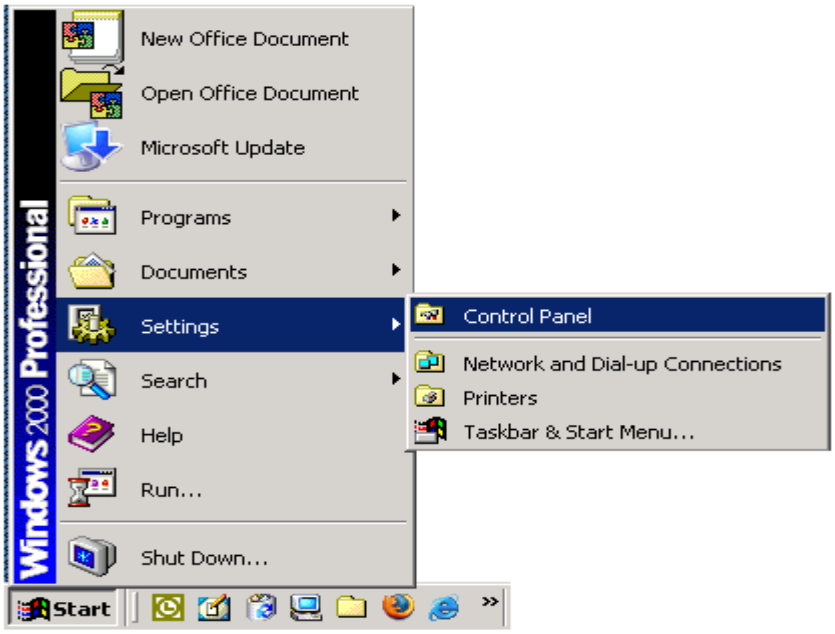

STEP 2: When the following screen is displayed, click on the Add/Remove Hardware Icon.

STEP 3: When the following screen is displayed, click **Next**.

Add/Remove Hardware Wizard
Welcome to the Add/Remove Hardware Wizard
This wizard helps you add, remove, unplug, and troubleshoot your hardware.
To continue, click Next.
< Back
Next >
Cancel

STEP 4: When the following screen is displayed, select **Uninstall/Unplug a device** (as shown here). Then, click **Next**.

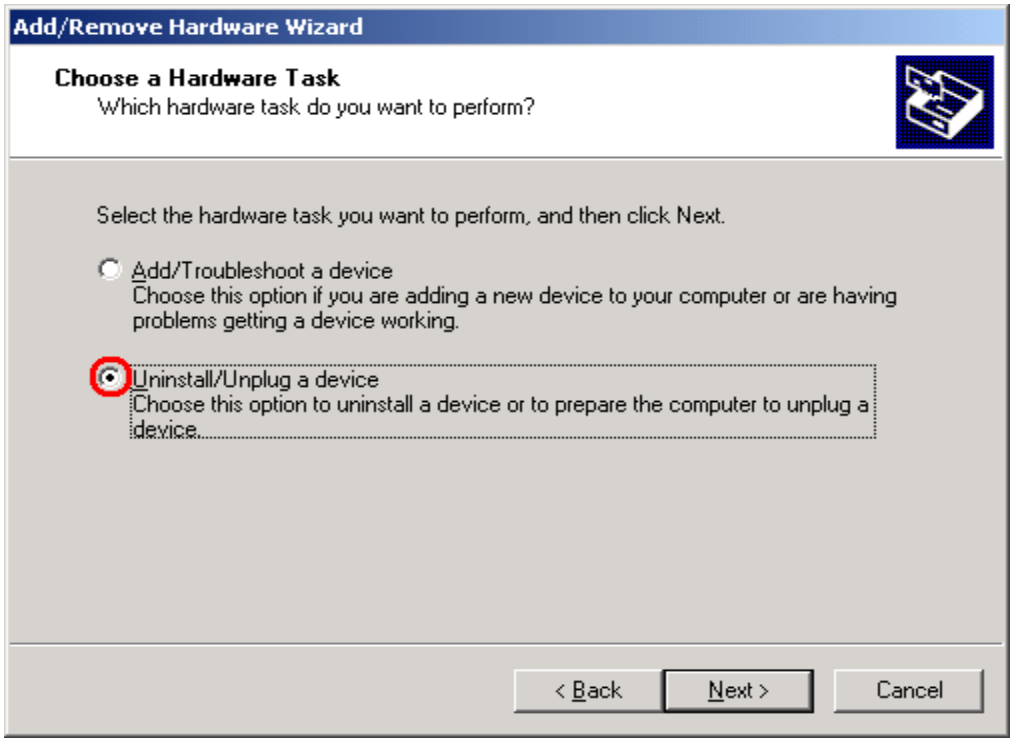
Add/Remove Hardware Wizard
Choose a Hardware Task
Which hardware task do you want to perform?
Select the hardware task you want to perform, and then click Next.
Add/Troubleshoot a device
Choose this option if you are adding a new device to your computer or are having problems getting a device working.
Uninstall/Unplug a device
Choose this option to uninstall a device or to prepare the computer to unplug a device.
< Back
Next >
Cancel

STEP 5: When the following screen is displayed, select **Uninstall a device** (as shown here). Then, click **Next**.

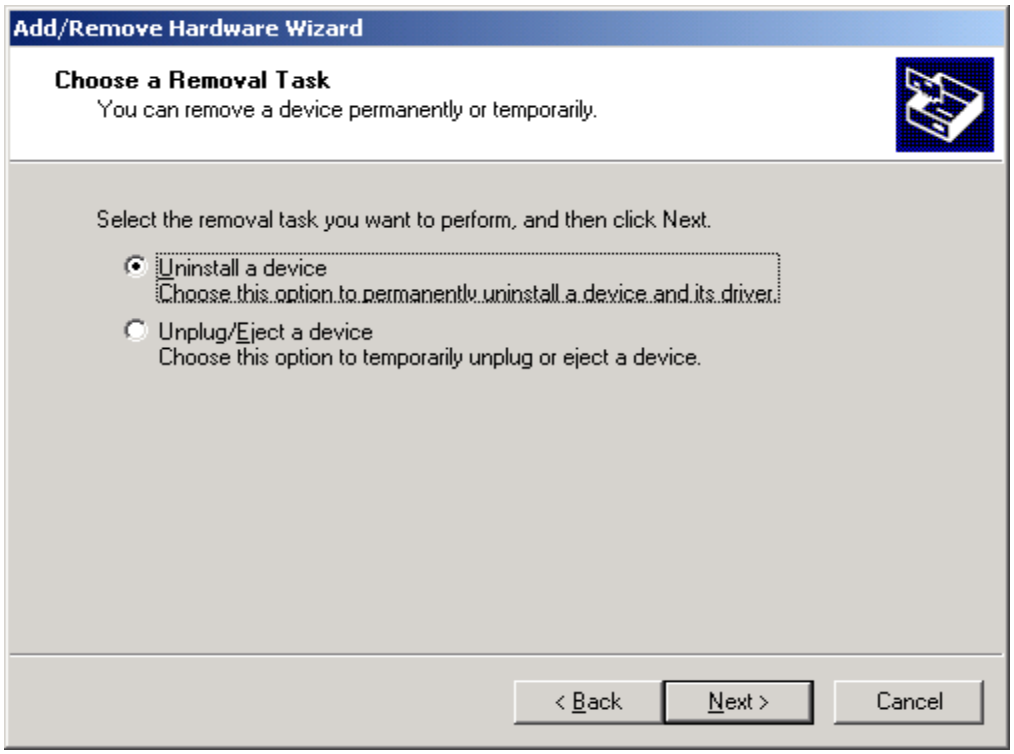
Add/Remove Hardware Wizard
Choose a Removal Task
You can remove a device permanently or temporarily.
Select the removal task you want to perform, and then click Next.
Uninstall a device
Choose this option to permanently uninstall a device and its driver.
Unplug/Eject a device
Choose this option to temporarily unplug or eject a device.
< Back
Next >
Cancel

STEP 6: When the following screen is displayed, select the device that you want to uninstall. Then, click **Next**.

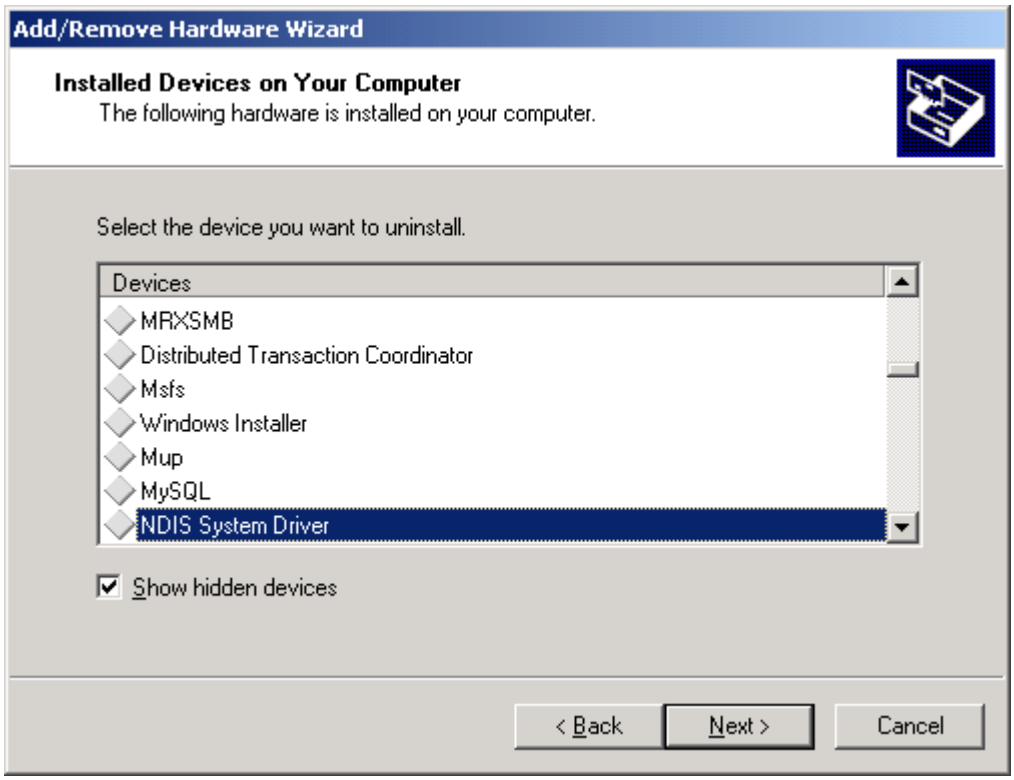

STEP 7: When the following screen is displayed, click **Next** to confirm that you want to uninstall the device.

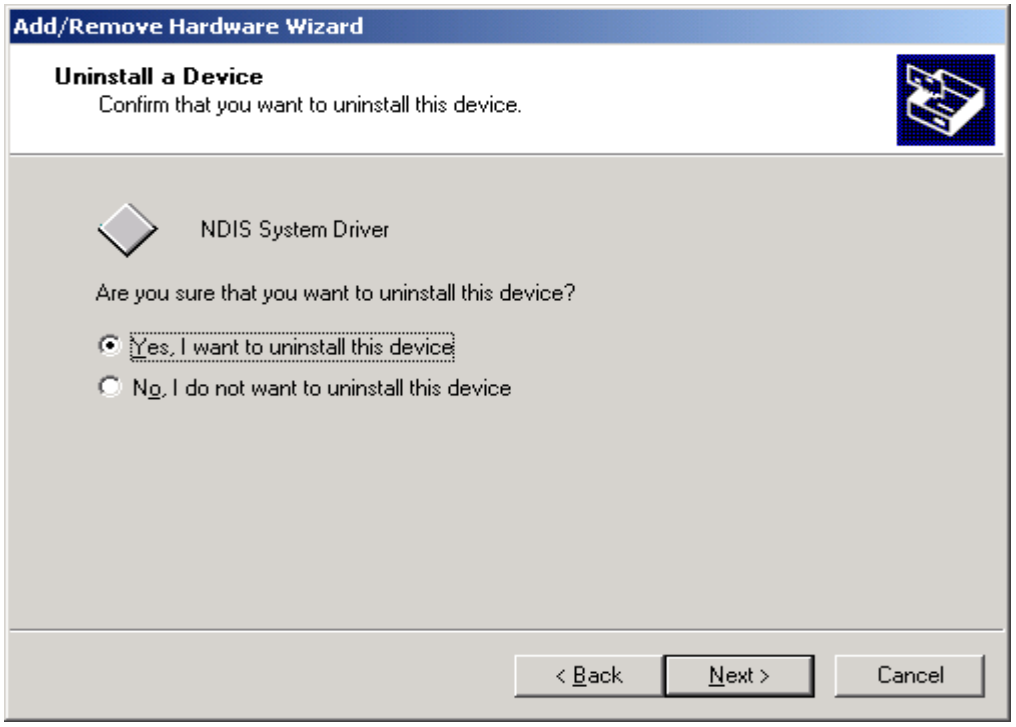
Add/Remove Hardware Wizard
Uninstall a Device
Confirm that you want to uninstall this device.
NDIS System Driver
Are you sure that you want to uninstall this device?
Yes, I want to uninstall this device
No, I do not want to uninstall this device
< Back
Next >
Cancel

STEP 8: When the following screen is displayed, click **Finish** as un-installation is complete.

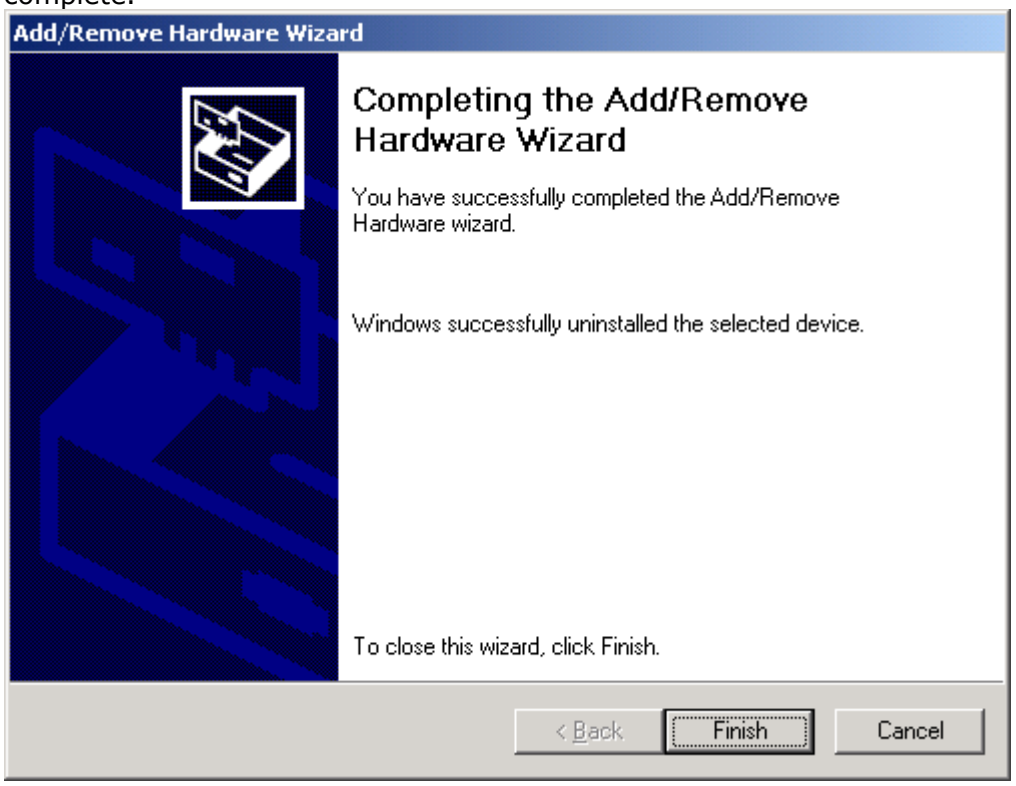
Add/Remove Hardware Wizard
Completing the Add/Remove Hardware Wizard
You have successfully completed the Add/Remove Hardware wizard.
Windows successfully uninstalled the selected device.
To close this wizard, click Finish.
< Back
Finish
Cancel

Chapter 3 Login via the Web Browser

This section describes how to manage the router via a Web browser via the remote end. You can use a web browser such as Microsoft Internet Explorer, or Netscape Navigator. (The Web page is best viewed with Microsoft Internet Explorer 5.0 and later): A unique default user account is assigned with user name **root** and password **12345**. The user can change the default password later when logged in to the device.

3.1 IP Address

The default IP address of the CT-5611T (LAN port) is 192.168.1.1. To configure the CT-5611T for the first time, the configuration PC must have a static IP address within the 192.168.1.x subnet. Follow the steps below to configure your PC IP address to use subnet 192.168.1.x.

STEP 1: Right click on the Local Area Connection under the Network and Dial-Up connection window and select Properties.

STEP 2: Enter the TCP/IP screen and change the IP address to the domain of 192.168.1.x/24.

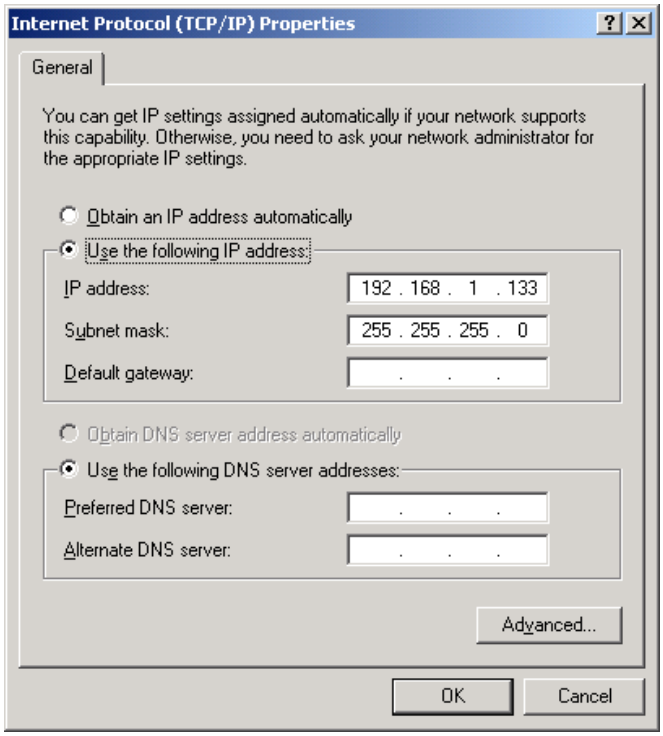
Internet Protocol (TCP/IP) Properties
General
You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.
Obtain an IP address automatically
Use the following IP address:
IP address:
192 . 168 . 1 . 133
Subnet mask:
255 . 255 . 255 . 0
Default gateway:
Obtain DNS server address automatically
Use the following DNS server addresses:
Preferred DNS server:
Alternate DNS server:
Advanced...
OK
Cancel

STEP 3: Click **OK** to submit the settings.

STEP 4: Start your Internet browser with the default IP address 192.168.1.1.

3.2 Login Procedure

Perform the following steps to bring up the Web user interface and configure the CT-5611T. To log on to the system from the Web browser, follow the steps below:

STEP 1: Start your Internet browser. Type the IP address for the router in the Web address field. For example, if the IP address is 192.168.1.1, type **http://192.168.1.1**

STEP 2: You will be prompted to enter your user name and password. Type **root** in the user name field and **12345** in the password field, and click **OK**. These values can be changed later in the Web User Interface by selecting the **Management** link.

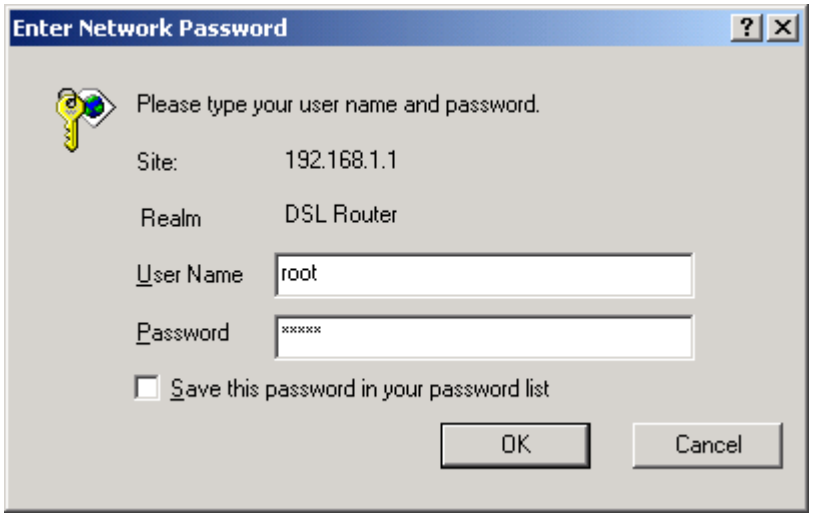

STEP 3: After successfully logging in, you will reach the Quick Setup menu.

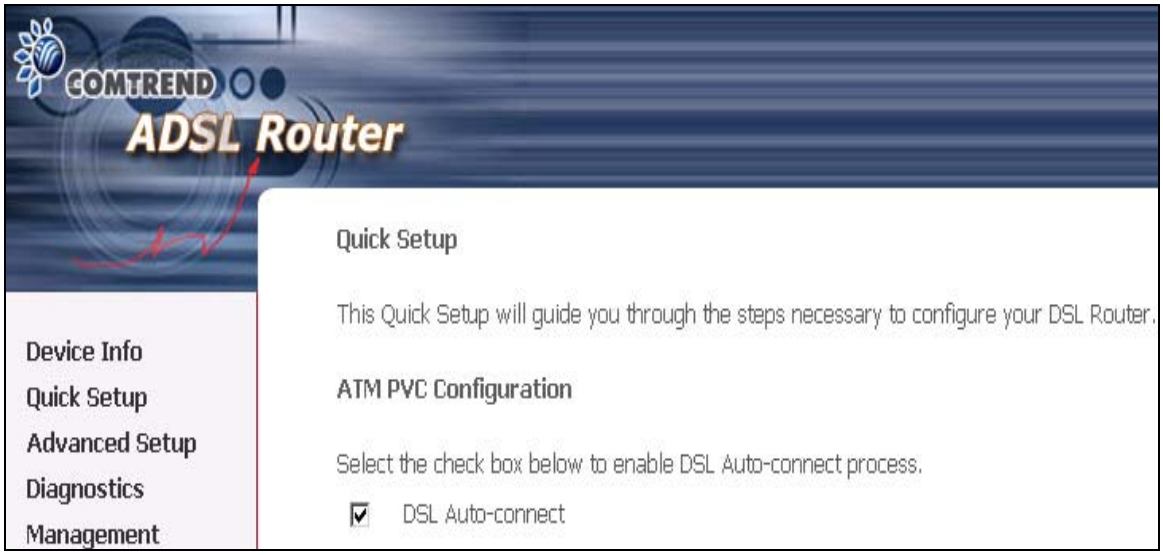

Here is the Device Info screen for your reference.

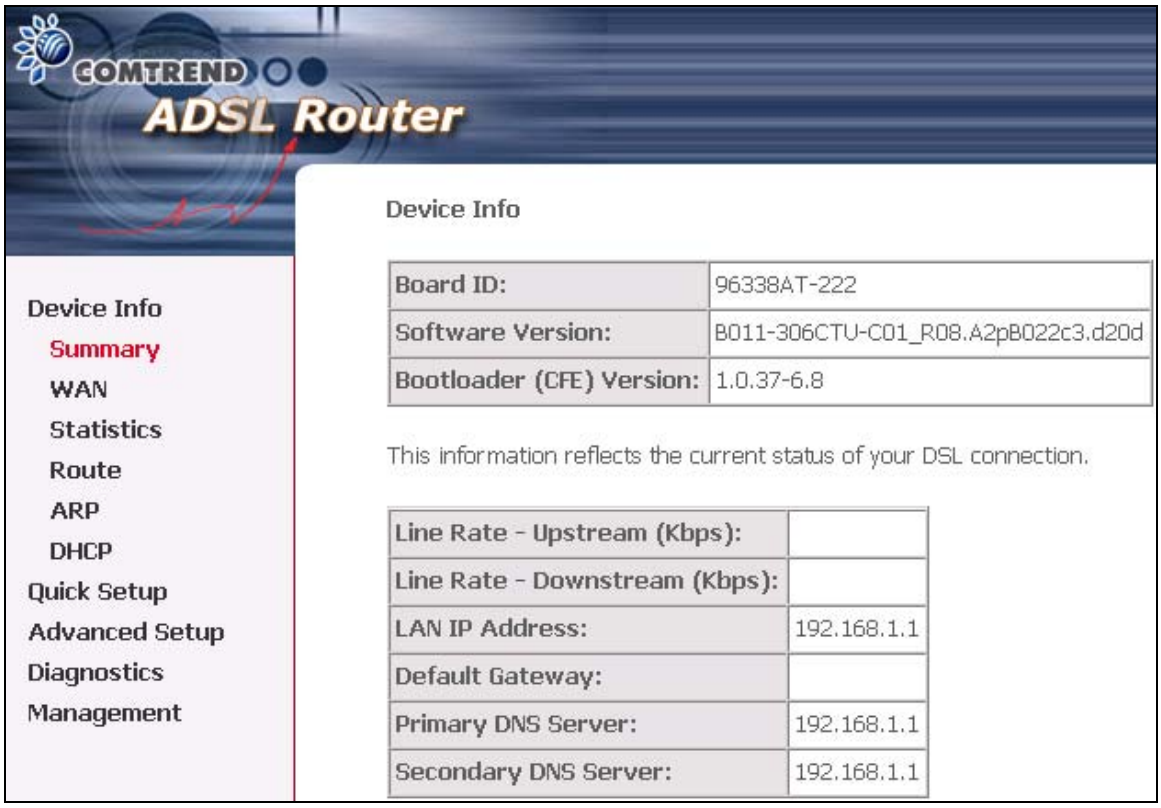
COMTREND
ADSL Router
Device Info
Summary
WAN
Statistics
Route
ARP
DHCP
Quick Setup
Advanced Setup
Diagnostics
Management
Device Info
Board ID: 96338AT-222
Software Version: B011-306CTU-C01_R08.A2pB022c3.d20d
Bootloader (CFE) Version: 1.0.37-6.8
This information reflects the current status of your DSL connection.
Line Rate - Upstream (Kbps):
Line Rate - Downstream (Kbps):
LAN IP Address: 192.168.1.1
Default Gateway:
Primary DNS Server: 192.168.1.1
Secondary DNS Server: 192.168.1.1

3.3 Default Settings

During power on initialization, the CT-5611T initializes all configuration attributes to default values. It will then read the configuration profile from the Permanent Storage section on the flash memory. The default attributes are overridden when identical attributes with different values are configured. The configuration profile in Permanent Storage can be created via the Web user interface, the console, or telnet user interface, or other management protocols. The factory default configuration can be restored either by pushing the reset button for more than five seconds, or by clicking the Restore Default Configuration option in the Restore Settings screen.

The following default settings are present when setting up the router for the first time. The PC running the browser can be attached to the Ethernet or the USB.

- LAN port IP address: 192.168.1.1
- Local administrator account name: root
- Local administrator account password: 12345
- Local non- administrator account name: user
- Local non- administrator account password: user
- Remote WAN access: disabled
- Remote WAN access account name: support/support
- Remote WAN access account password: support/support
- NAT and firewall: disabled
- DHCP server on LAN interface: enable
- WAN IP address: none

Chapter 4 Quick Setup

After login, the **Quick Setup** screen appears as shown.

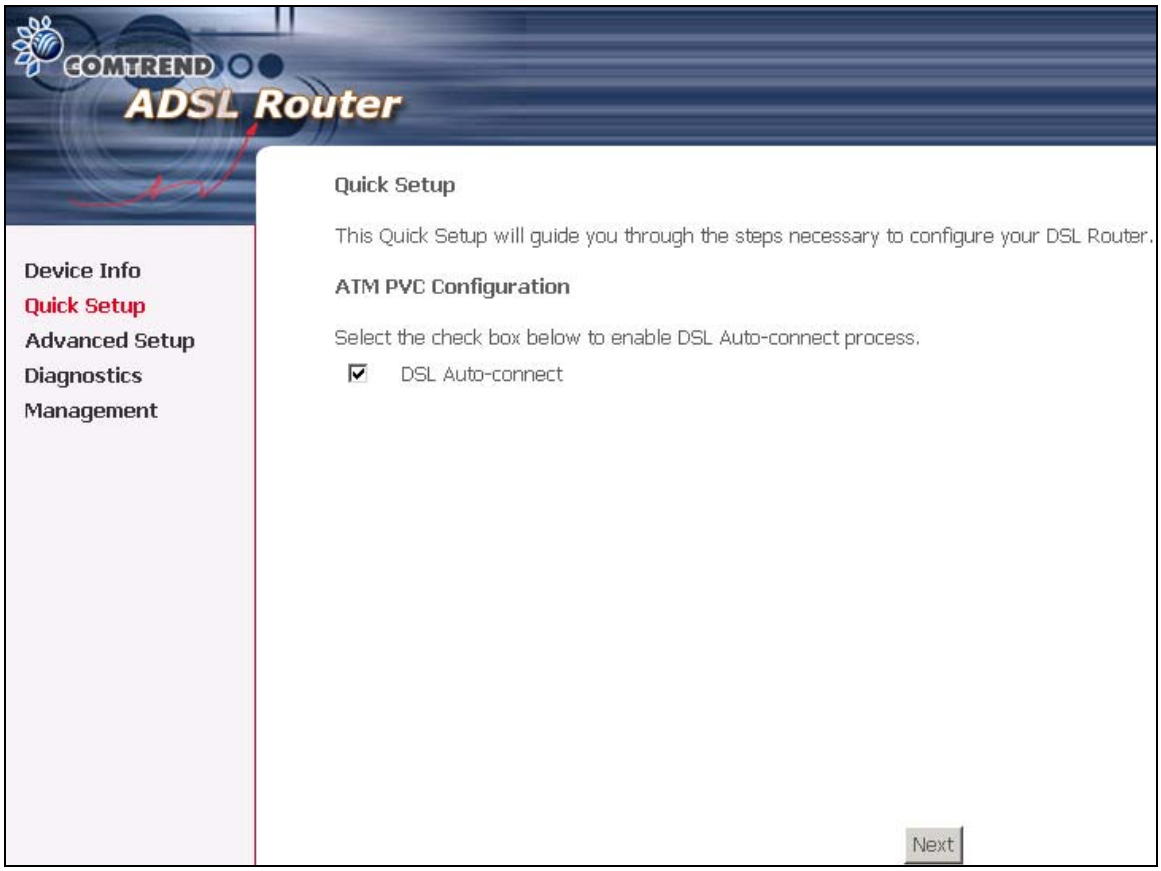

Note: The selections available on the left side of menu are based upon the configured connection.

4.1 WAN

Click **Device Info** on the menu bar to display the WAN option. Then, click **WAN** on the Device Info menu bar to display the configured PVC(s) and the status.

VPI/VCI	Shows the values of the ATM VPI/VCI
Con. ID	Shows the connection ID
Category	Shows the ATM service classes
Service	Shows the name for WAN connection
Interface	Shows connection interfaces
Protocol	Shows the connection type, such as PPPoE, PPPoA, etc.
IGMP	Shows the statue of the IGMP function
Nat	Shows if the Network Address Translation(NAT) is enabled or disabled.
QoS	Shows if QoS is enabled or disabled
State	Shows the connection state of the WAN connection
Status	Lists the status of DSL link
IP Address	Shows IP address for WAN interface

4.2 Statistics

Selection of the Statistics screen provides statistics for the Network Interface of LAN, WAN, ATM and ADSL. All statistics screens are updated every 15 seconds.

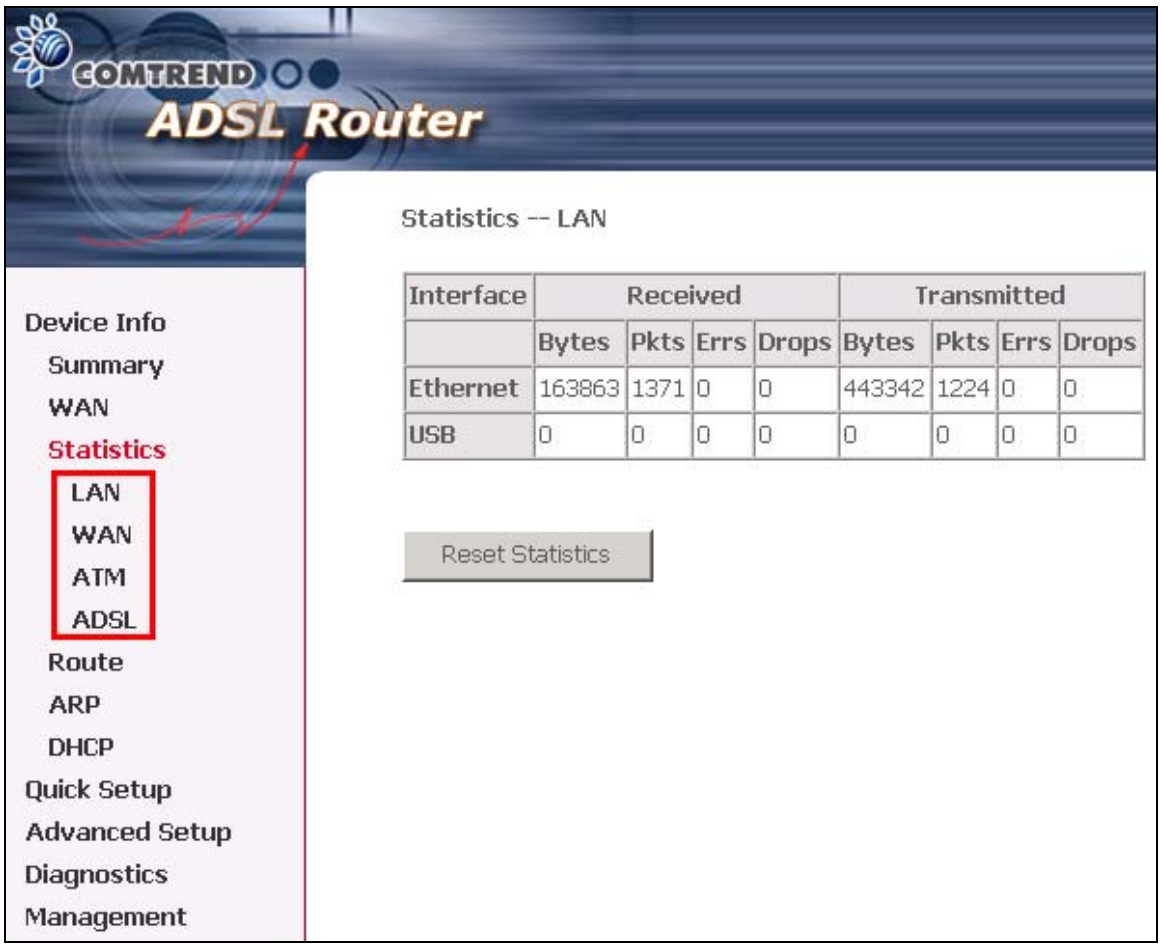

4.2.1 LAN Statistics

The Network Statistics screen shows interface statistics for Ethernet and USB interfaces. (The Network Statistics screen shows interface statistics for LAN of Ethernet and USB interfaces. This shows byte transfer, packet transfer, Error and Drop statistics for the LAN interface.)

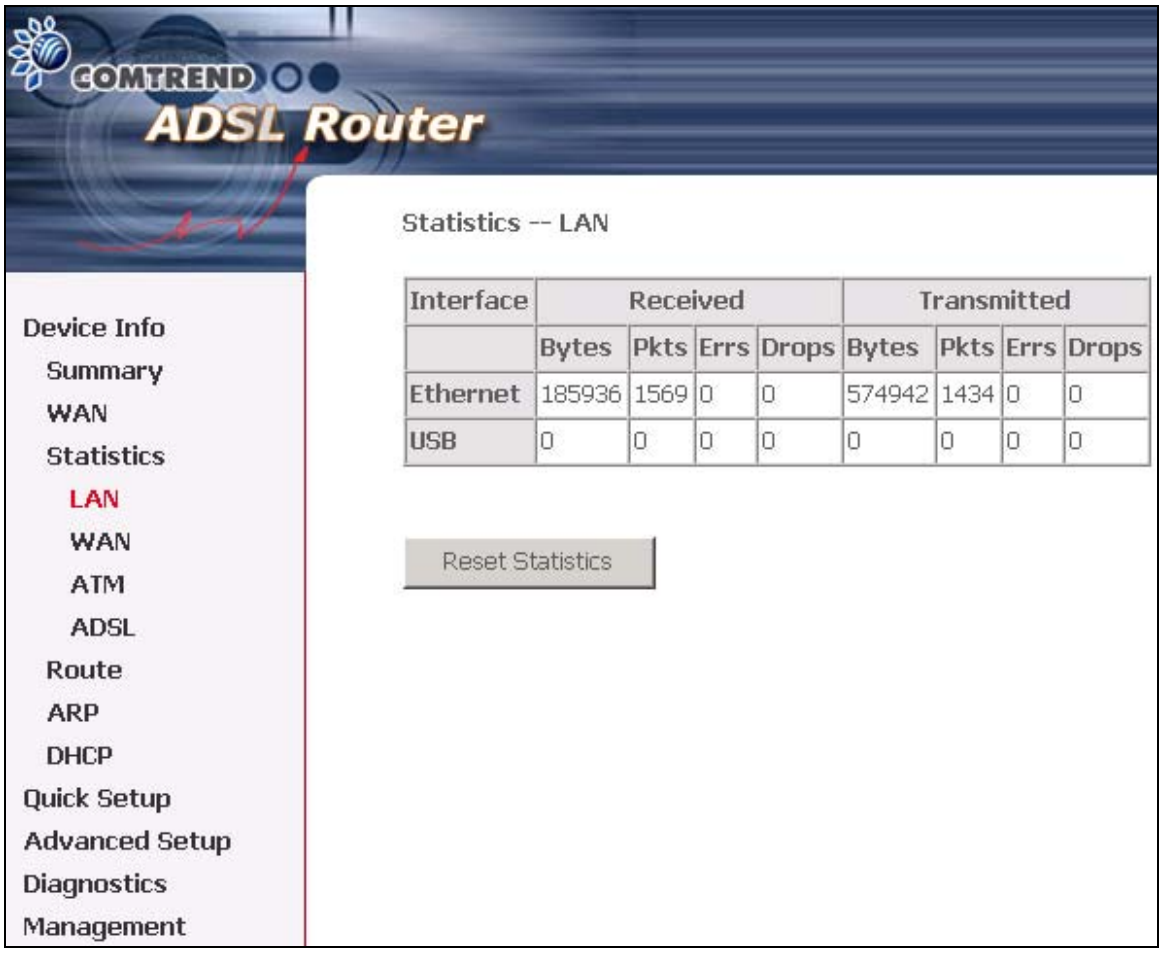

4.2.2 WAN Statistics

The following figure shows the WAN statistics screen.

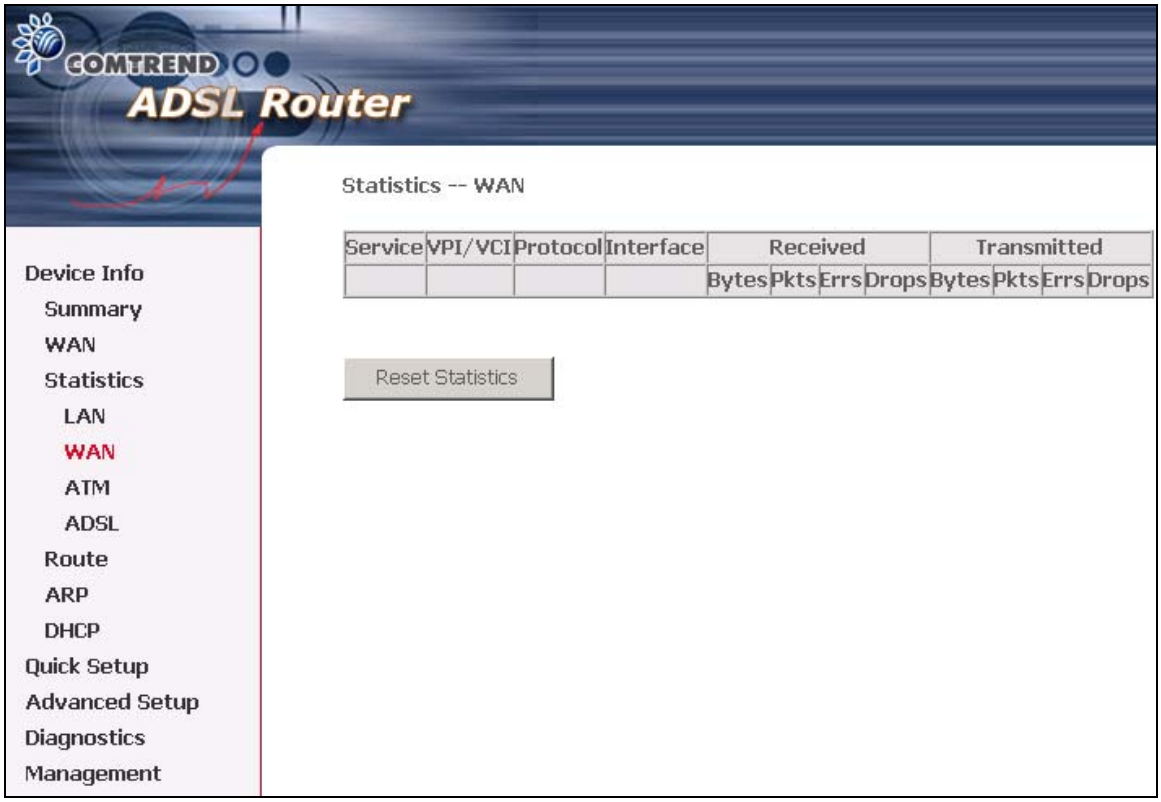

Service	Shows the service type
VPI/VCI	Shows the values of the ATM VPI/VCI
Protocol	Shows the connection type, such as PPPoE, PPPoA, etc.
Interface	Shows connection interfaces
Received/Transmitted Bytes - Pkts - Errs - Drops -	 Rx/TX (receive/transmit) packet in Byte Rx/TX (receive/transmit) packets Rx/TX (receive/transmit) the packets which are errors, Rx/TX (receive/transmit) the packets which are dropped

4.2.3 ATM statistics

The following figure shows the ATM statistics screen.

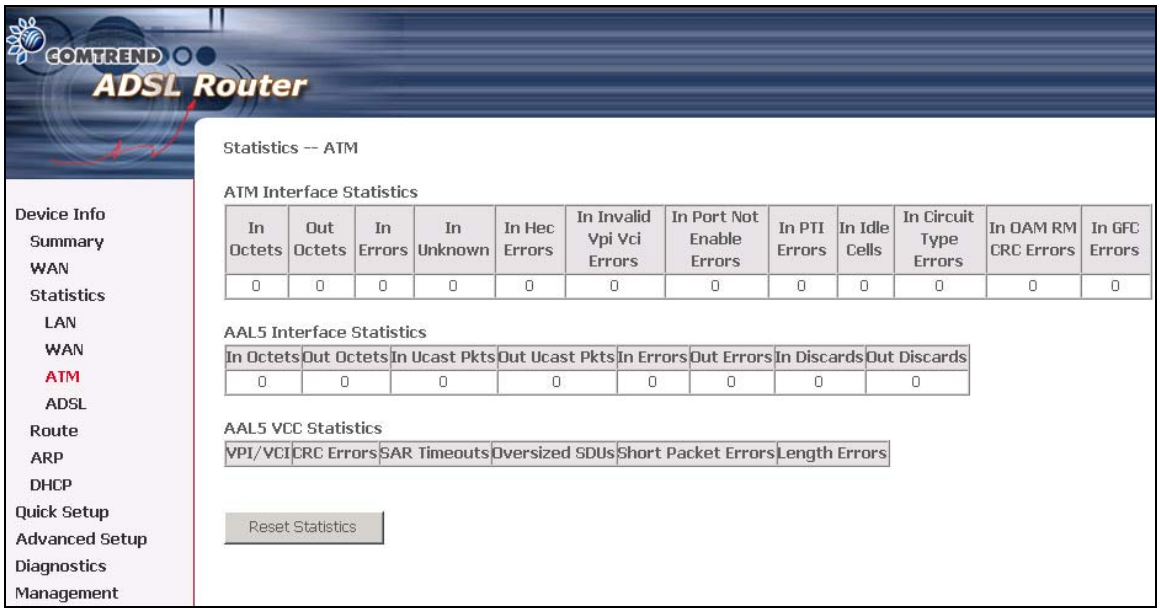

ATM Interface Statistics

Field	Description
In Octets	Number of received octets over the interface
Out Octets	Number of transmitted octets over the interface
In Errors	Number of cells dropped due to uncorrectable HEC errors
In Unknown	Number of received cells discarded during cell header validation, including cells with unrecognized VPI/VCI values, and cells with invalid cell header patterns. If cells with undefined PTI values are discarded, they are also counted here.
In Hec Errors	Number of cells received with an ATM Cell Header HEX error
In Invalid Vpi Vci Errors	Number of cells received with an unregistered VCC address.
In Port Not Enabled Errors	Number of cells received on a port that has not been enabled.
In PTI Errors	Number of cells received with an ATM header Payload Type Indicator (PTI) error
In Idle Cells	Number of idle cells received
In Circuit Type Errors	Number of cells received with an illegal circuit type
In Oam RM CRC Errors	Number of OAM and RM cells received with CRC errors
In GFC Errors	Number of cells received with a non-zero GFC.

ATM AAL5 Layer Statistics over ADSL interface

Field	Description
In Octets	Number of received AAL5/AAL0 CPCS PDU octets
Out Octets	Number of received AAL5/AAL0 CPCS PDUs octets transmitted
In Ucst Pkts	Number of received AAL5/AAL0 CPCS PDUs passed to a higher-layer for transmission
Out Ucast Pkts	Number of received AAL5/AAL0 CPCS PDUs received from a higher layer for transmissions
In Errors	Number of received AAL5/AAL0 CPCS PDUs received that contain an error. The types of errors counted include CRC-32 errors.
Out Errors	Number of received AAL5/AAL0 CPCS PDUs that could be transmitted due to errors.
In Discards	Number of received AAL5/AAL0 CPCS PDUs discarded due to an input buffer overflow condition.
Out Discards	This field is not currently used

ATM AAL5 LAYER STATISTICS FOR EACH VCC OVER ADSL INTERFACE

Field	Descriptions
CRC Errors	Number of PDUs received with CRC-32 errors
SAR TimeOuts	Number of partially re-assembled PDUs, which were discarded because they were not fully re-assembled within the required period of time. If the re-assembly time is not supported then, this object contains a zero value.
Over Sized SDUs	Number of PDUs discarded because the corresponding SDU was too large
Short Packets Errors	Number of PDUs discarded because the PDU length was less than the size of the AAL5 trailer
Length Errors	Number of PDUs discarded because the PDU length did not match the length in the AAL5 trailer

4.2.4 ADSL Statistics

The following figure shows the ADSL Network Statistics screen. Within the ADSL Statistics window, a bit Error Rate Test can be started using the ADSL BER Test button. The Reset button resets the statistics.

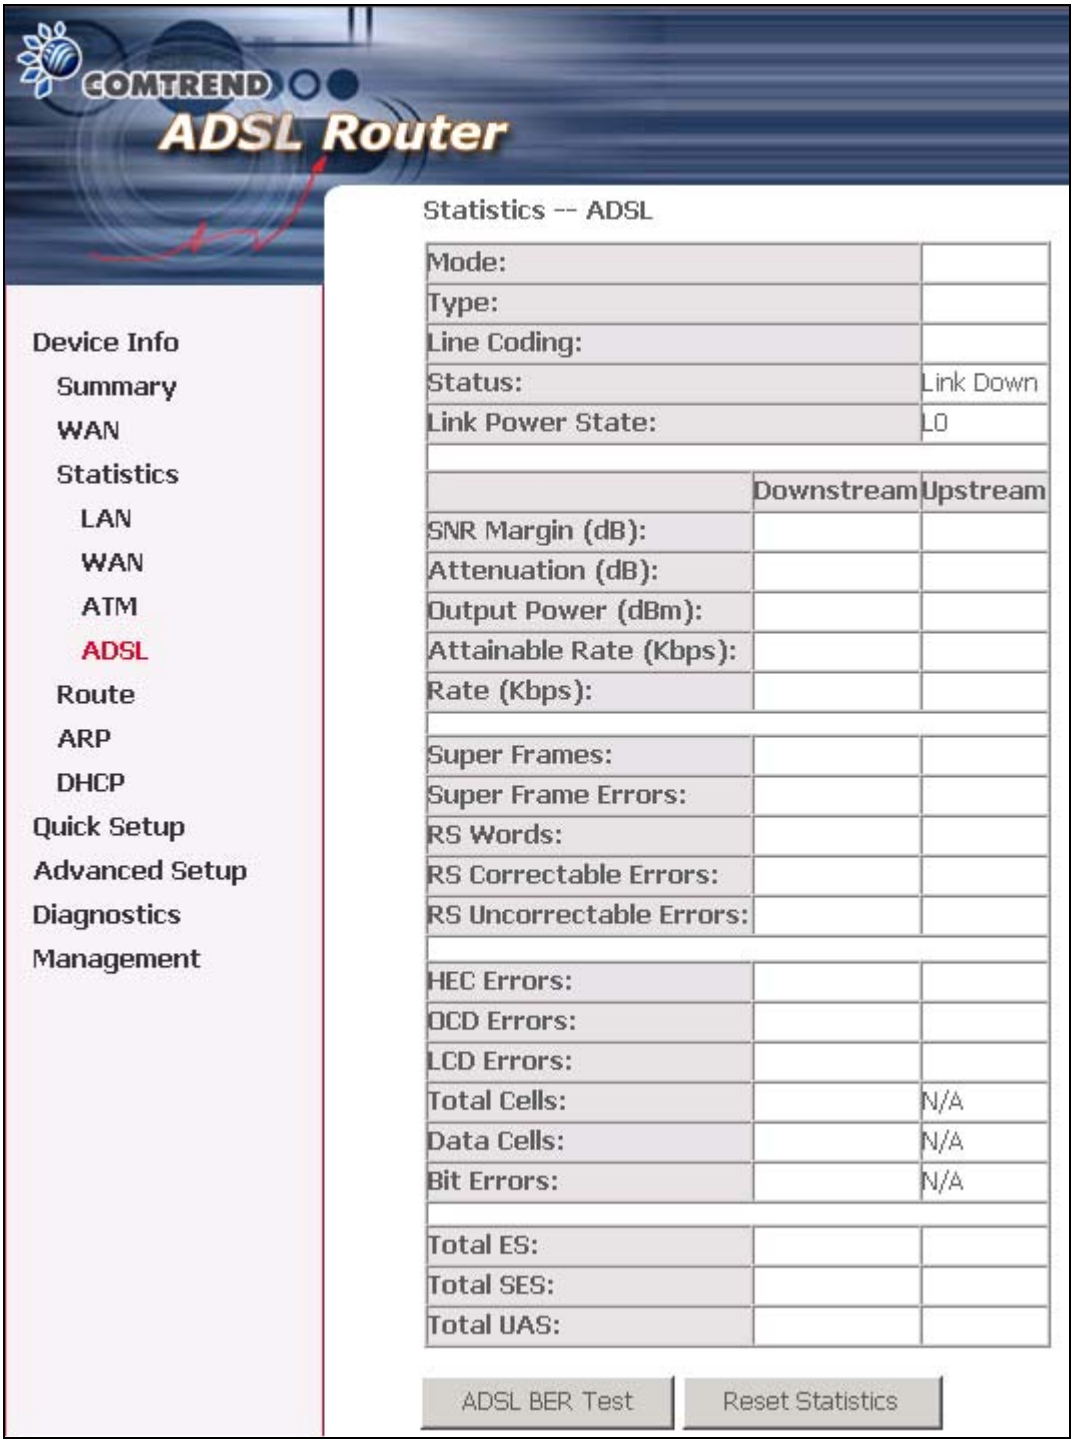

Field	Description
Mode	Modulation protocol G.dmt, G.lite, T1.413, ADSL2, ADSL2+
Type	Channel type Interleave or Fast
Line Coding	Trellis On/Off
Status	Lists the status of the DSL link
Link Power State	Link output power state.
SNR Margin (dB)	Signal to Noise Ratio (SNR) margin
Attenuation (dB)	Estimate of average loop attenuation in the downstream direction.
Output Power (dBm)	Total upstream output power
Attainable Rate (Kbps)	The sync rate you would obtain.
Rate (Kbps)	Current sync rate.
Super Frames	Total number of super frames
Super Frame Errors	Number of super frames received with errors
RS Words	Total number of Reed-Solomon code errors
RS Correctable Errors	Total Number of RS with correctable errors
RS Uncorrectable Errors	Total Number of RS words with uncorrectable errors
HEC Errors	Total Number of Header Error Checksum errors
OCD Errors	Total Number of out-of-cell Delineation errors
LCD Errors	Total number of Loss of Cell Delineation
Total ES:	Total Number of Errored Seconds
Total SES:	Total Number of Severely Errored Seconds
Total UAS:	Total Number of Unavailable Seconds

4.2.5 Route

Choose **Route** to display the routes that the route information has learned.

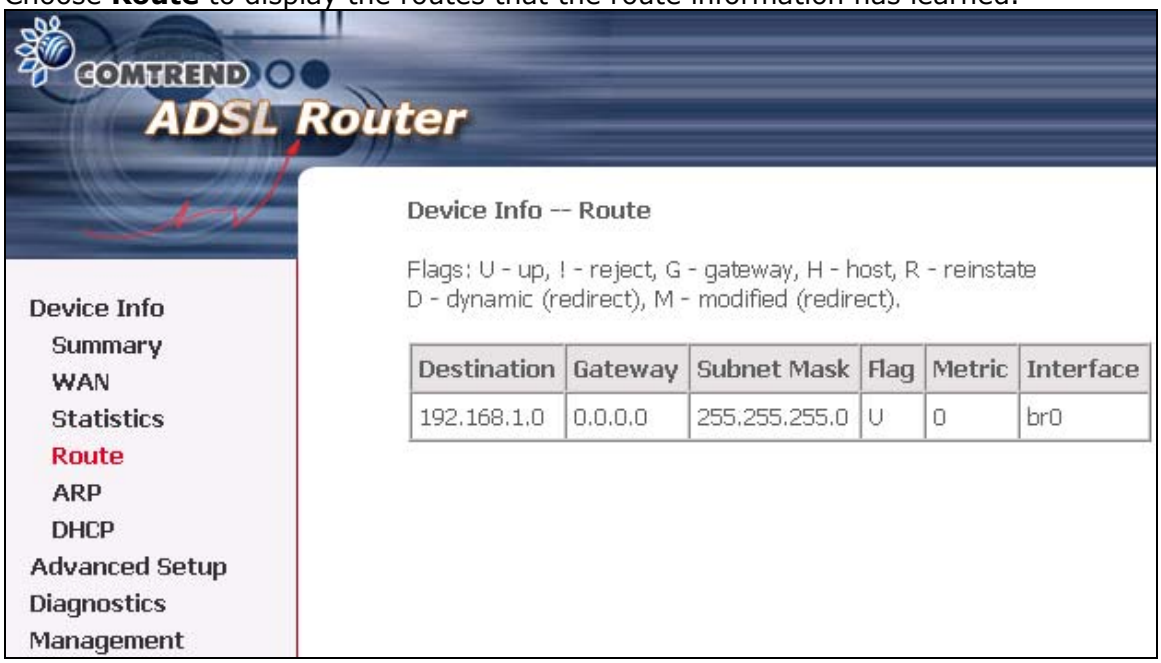

4.2.6 ARP

Click **ARP** to display the ARP information.

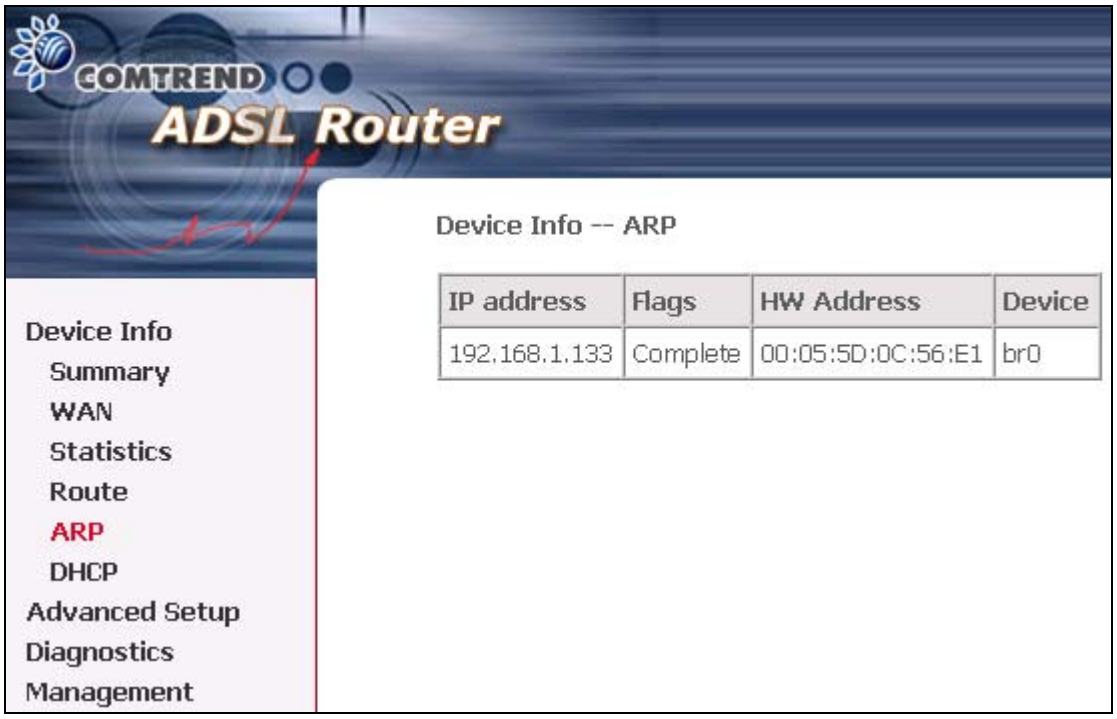

4.2.7 DHCP

Click DHCP to display the DHCP information.

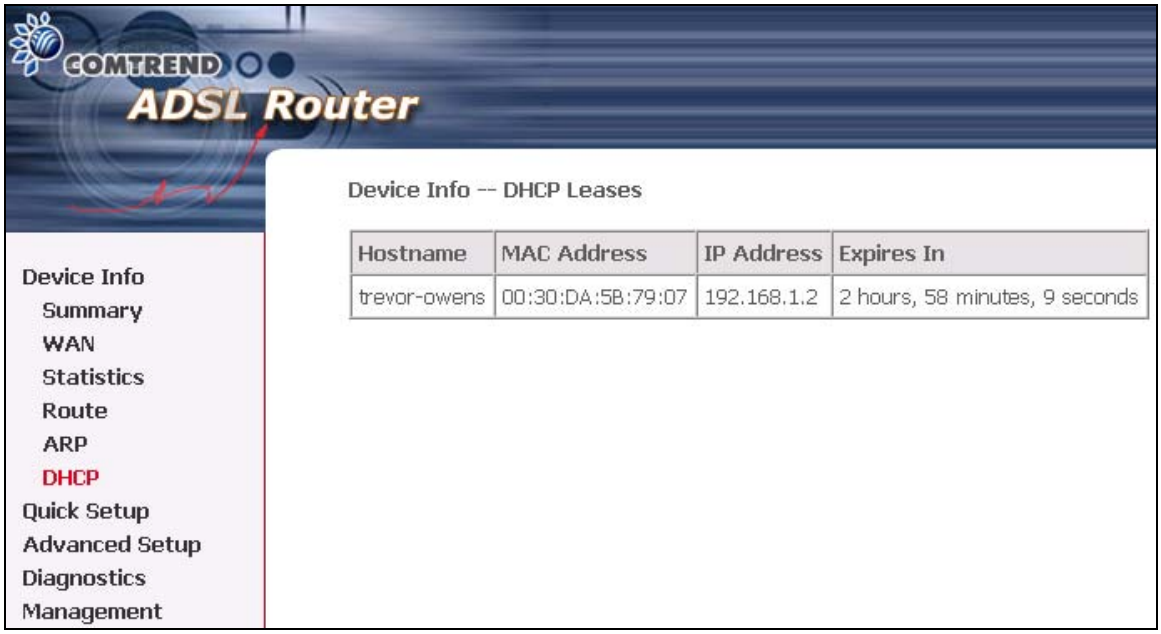

Chapter 5 Quick Setup

The Quick Setup allows the user to configure the ADSL router for DSL connectivity and Internet access. It also guides the user though the WAN network setup first and then the LAN interface setup. You can either manually customize the router or follow the online instruction to set up the router.

The CT-5611T ADSL router supports the following five network operating modes over an ATM PVC WAN interface.
PPP over Ethernet (PPPoE)
PPP over ATM (PPPoA)
MAC Encapsulated Routing (MER)
IP over ATM (IPoA)
Bridging

The following configuration considerations apply:
The WAN network operating mode operation depends on the service provider's configuration on the Central Office side and Broadband Access Server for the PVC
If the service provider provides PPPoE service, then the connection selection depends on whether the LAN-side device (typically a PC) is running a PPPoE client or whether the CT-5611T is to run the PPPoE client. The CT-5611T can support both cases simultaneously.

If some or none of the LAN-side devices do not run PPPoE client, then select PPPoE.
If every LAN-side device is running a PPPoE client, then select Bridge In PPPoE mode, CT-5611T also supports pass-through PPPoE sessions from the LAN side while simultaneously running a PPPoE client fro non-PPPoE LAN devices.

NAPT and firewall are always enabled when PPPoE mode is selected, but they can be enabled or disabled by the user when MER or IPoA is selected, NAPT and firewall are always disabled when Bridge mode is selected.

Depending on the network operating mode, and whether NAPT and firewall are enabled or disabled, the main panel will display or hide the NAPT/Firewall menu. For instance, at initial setup, the default network operating mode is Bridge. The main panel will not show the NAPT and Firewall menu.

Note: Up to eight PVC profiles can be configured and saved on the flash memory. To activate a particular PVC profile, you need to navigate all the Quick Setup pages until the last summary page, then click on the Finish button and reboot the system.

5.1 Auto Quick Setup

The auto quick setup requires the ADSL link to be up. The ADSL router will automatically detect the PVC. You only need to follow the online instructions that you are prompted.

1. Select Quick Setup to display the DSL Quick Setup screen.

2. Click Next to start the setup process. Follow the online instructions to complete the setting. This procedure will skip some processes like PVC index, or encapsulation.

3. After the settings are complete, you can use the ADSL service.

5.2 Manual Quick Setup

STEP 1: Click Quick Setup and un-tick the DSL Auto-connect checkbox to enable manual configuration of the connection type.

COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Diagnostics
Management
Quick Setup
This Quick Setup will guide you through the steps necessary to configure your DSL Router.
ATM PVC Configuration
Select the check box below to enable DSL Auto-connect process.
DSL Auto-connect
Un-tick this checkbox to enable manual setup and display the following screen.

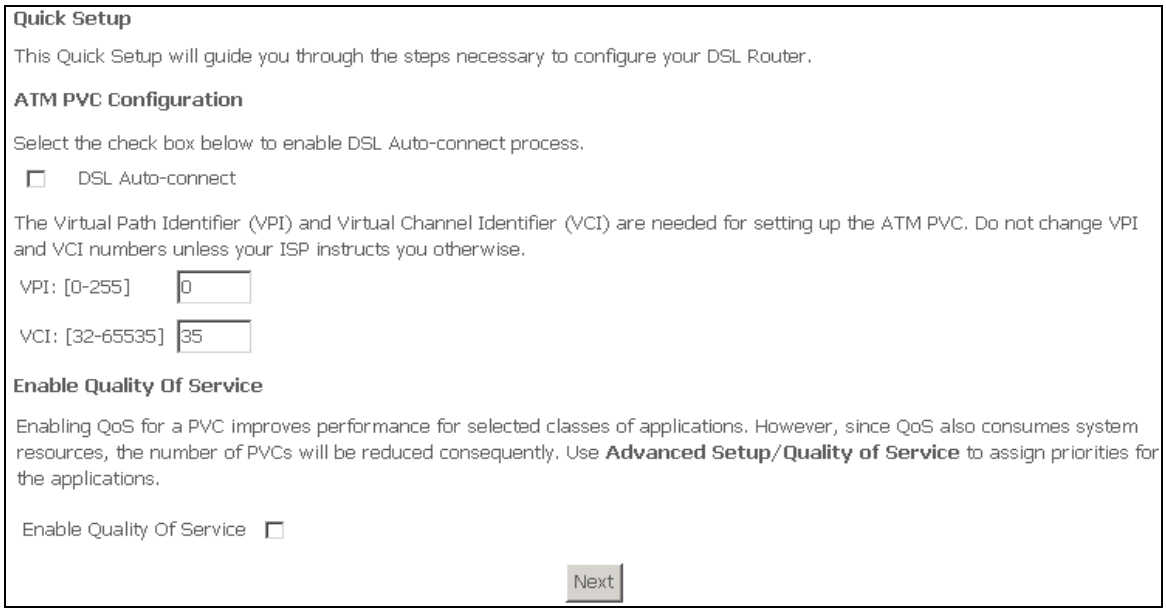
Quick Setup
This Quick Setup will guide you through the steps necessary to configure your DSL Router.
ATM PVC Configuration
Select the check box below to enable DSL Auto-connect process.
DSL Auto-connect
The Virtual Path Identifier (VPI) and Virtual Channel Identifier (VCI) are needed for setting up the ATM PVC. Do not change VPI and VCI numbers unless your ISP instructs you otherwise.
VPI: [0-255] 0
VCI: [32-65535] 35
Enable Quality Of Service
Enabling QoS for a PVC improves performance for selected classes of applications. However, since QoS also consumes system resources, the number of PVCs will be reduced consequently. Use Advanced Setup/Quality of Service to assign priorities for the applications.
Enable Quality Of Service
Next

STEP 2: Enter the Virtual Path Identifier (VPI) and Virtual Channel Identifier (VCI). Select Enable Quality Of Service if required. Click Next.

STEP 3: Then, choose the Encapsulation mode.

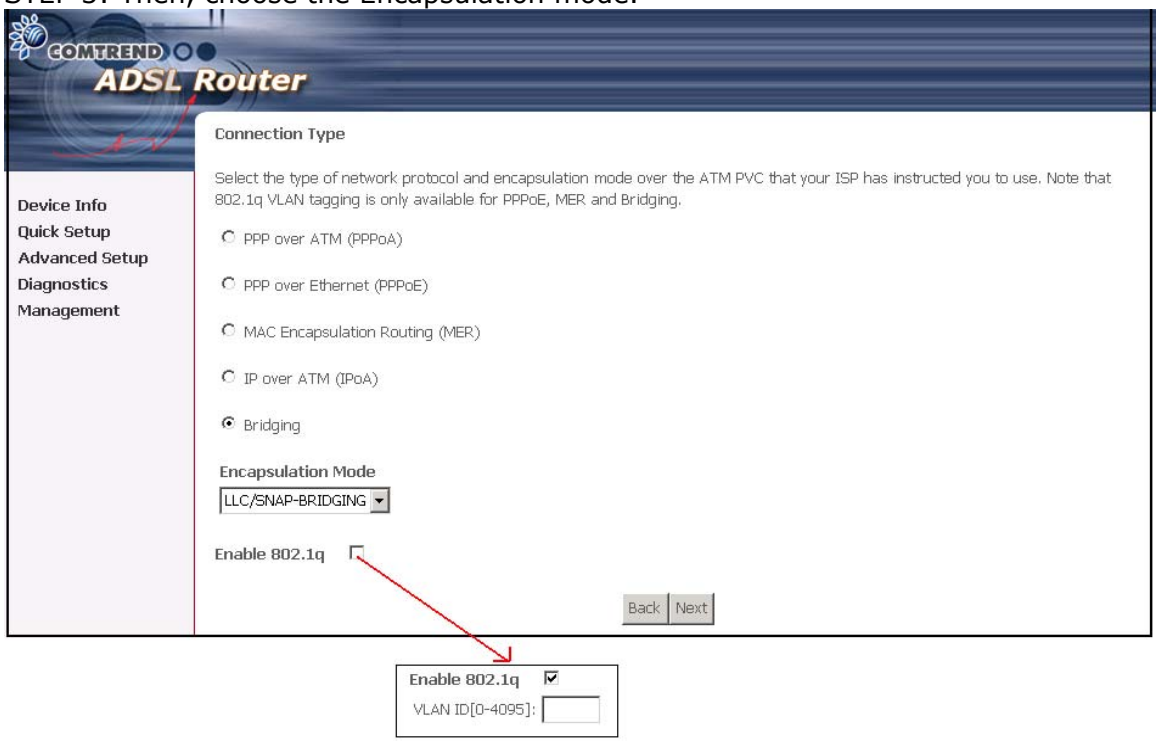

STEP 4: Choosing different connection types pops up different settings requests. Enter appropriate settings that are requested by your service provider. The following descriptions state each connection type setup separately. Select **Enable 802.1q** (by ticking the box) if required, and input a number for the VLAN ID. Click on "Next" to go to next step.

5.2.1 PPP over ATM (PPPoA) and PPP over Ethernet (PPPoE)

1. Select the **PPP over ATM (PPPoA)** or **PPP over Ethernet (PPPoE)** radio button and click **Next**. The following screen appears:

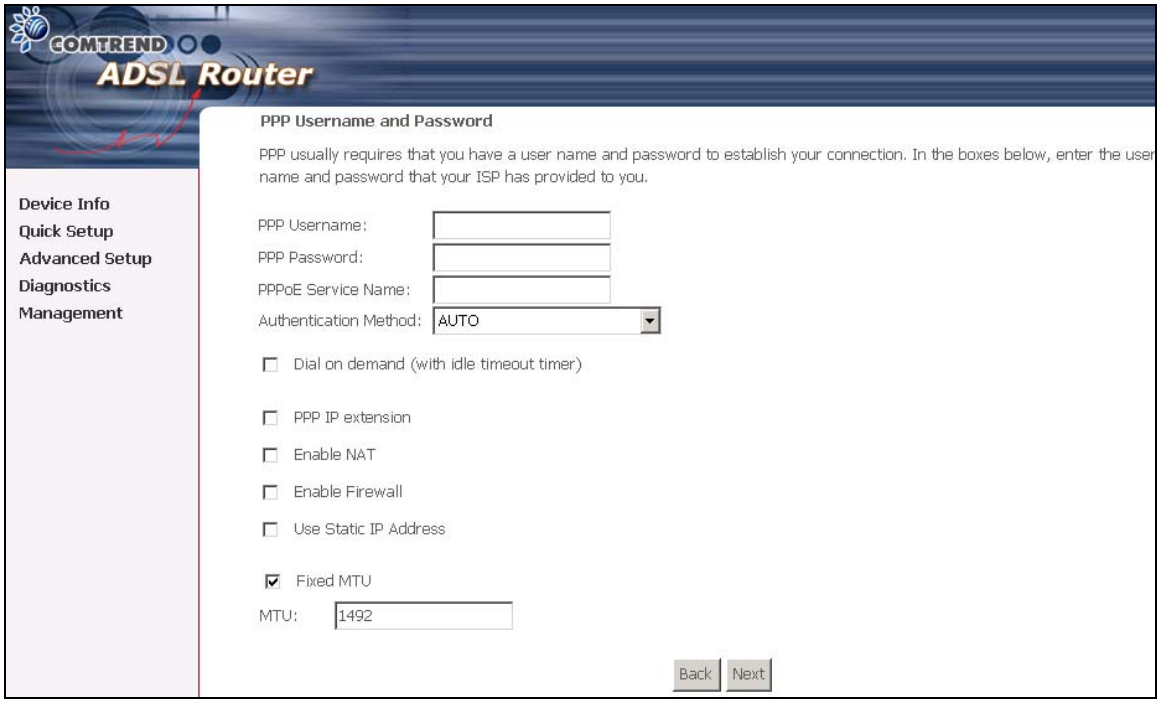

PPP USERNAME/PPP PASSWORD

The PPP Username and the PPP password requirement are dependent on the particular requirements of the ISP or the ADSL service provider. The WEB user interface allows a maximum of 256 characters in the PPP user name and a maximum of 32 characters in PPP password.

Authentication Method

Choose from AUTO, PAP, CHAP and MSCHAP.

Encapsulation Mode

Choosing different connection types provides different encapsulation modes.

- PPPoA- VC/MUX, LLC/ENCAPSULATION
- PPPoE- LLC/SNAP BRIDGING, VC/MUX
- MER- LLC/SNAP-BRIDGING, VC/MUX
- IPoA- LLC/SNAP-ROUTING, VC MUX
- Bridging- LLC/SNAP-BRIDGING, VC/MUX

Disconnect if no activity

The CT-5611T can be configured to disconnect if there is no activity for a period of time by selecting the **Dial on demand** check box. When the checkbox is ticked, you need to enter the inactivity timeout period. The timeout period ranges from 1 minute to 4320 minutes.

PPP IP Extension

The PPP IP Extension is a special feature deployed by some service providers. Unless your service provider specially requires this setup, do not select it.
The PPP IP Extension supports the following conditions:

- Allows only one PC on the LAN
- The public IP address assigned by the remote side using the PPP/IPCP protocol is actually not used on the WAN PPP interface. Instead, it is forwarded to the PC's LAN interface through DHCP. Only one PC on the LAN can be connected to the remote, since the DHCP server within the ADSL router has a single IP address to assign to a LAN device.
- NAPT and firewall are disabled when this option is selected.
- The ADSL router becomes the default gateway and DNS server to the PC through DHCP using the LAN interface IP address.
- The ADSL router extends the IP subnet at the remote service provider to the LAN PC. That is, the PC becomes a host belonging to the same IP subnet.
- The ADSL router bridges the IP packets between WAN and LAN ports, unless the packet is addressed to the router's LAN IP address.

Enable NAT checkbox

If the LAN is configured with a private IP address, the user should select this checkbox. The NAT submenu on the left side main panel will be displayed after reboot. The user can then configure NAT-related features after the system comes up. If a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox should be de-selected. When the system comes back after reboot, the NAT submenu will not be displayed on the left main panel.

Enable Firewall

The Internet has made large amounts of information available to the average computer user at home, in business and in education. For many people, having access to this information is no longer just an advantage, it is essential. Yet connecting a private network to the Internet can expose critical or confidential data to malicious attack from anywhere in the world. Users who connect their computers to the Internet must be aware of these dangers, their implications and how to protect their data and their critical systems. Firewalls can protect both individual computers and corporate networks from hostile intrusion from the Internet, but must be understood to be used correctly.

Use Static IP Address
Unless your service provider specially requires this setup, do not select it.
If selected, enter your static IP address.

MTU

This option allows us to change the MTU size for WAN interface, PPPoE and PPPoA. The default value is 1492 for PPPoE and 1500 for PPPoA.

2. Click **Next** to display the screen below.

Enable IGMP Multicast checkbox: Tick the checkbox to enable IGMP multicast (proxy). IGMP (Internet Group Membership Protocol) is a protocol used by IP hosts to report their multicast group memberships to any immediately neighboring multicast routers.

Enable WAN Service checkbox: Tick this item to enable the ATM service. Untick it to stop the ATM service.

Service Name: This is user-defined.

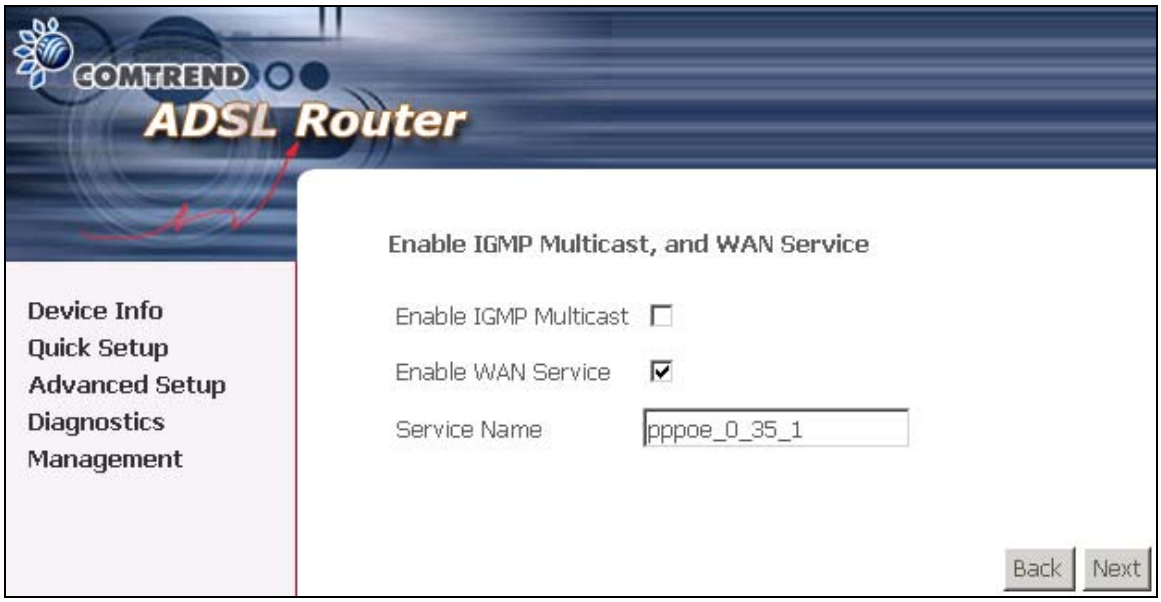

3. After entering your settings, select **Next**. The following screen appears. The Device Setup page allows the user to configure the LAN interface IP address, subnet mask and DHCP server. If the user would like this ADSL router to assign dynamic IP addresses, DNS server and default gateway to other LAN devices, select the radio box **Enable DHCP server on the LAN** to enter the starting IP address and end IP address and DHCP lease time. This configures the router to automatically assign IP addresses, default gateway address and DNS server addresses to each of your PCs.

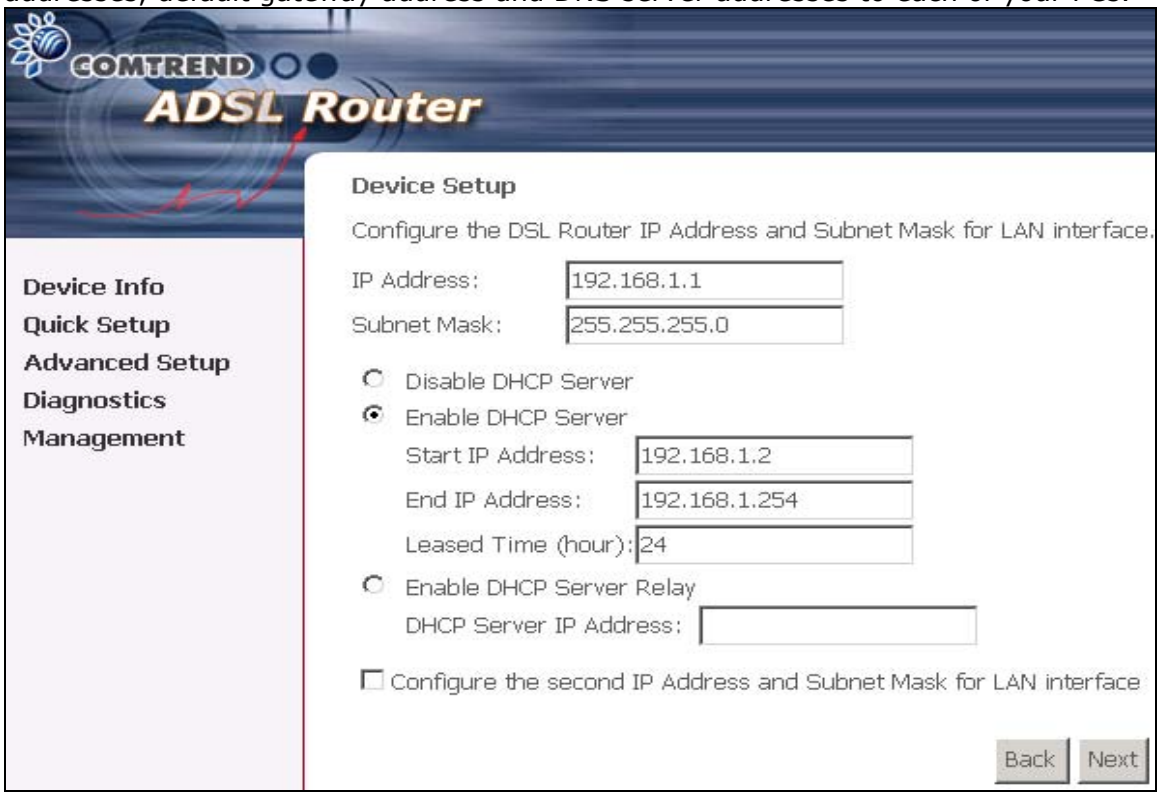

Note 1: Enable DHCP Server Relay will not display if NAT is enabled in the previous step.

Note 2: The router's default IP address is 192.168.1.1 and the default private address range provided by the ISP server in the router is 192.168.1.2 through 192.168.1.254.

Select **Enable DHCP Server Relay** (if required), and enter the DHCP Server IP Address. This allows the router to relay the DHCP packets to the remote DHCP server. The remote DHCP server will provide the IP address.

To configure a secondary IP address for the LAN port, click the box as shown below.

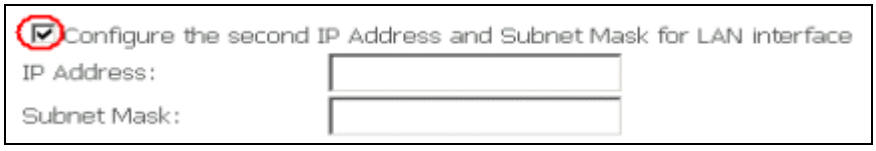

4. Click **Next** to display the WAN Setup-Summary screen that presents the entire configuration summary. Click **Save/Reboot** if the settings are correct. Click **Back** if you wish to modify the settings.

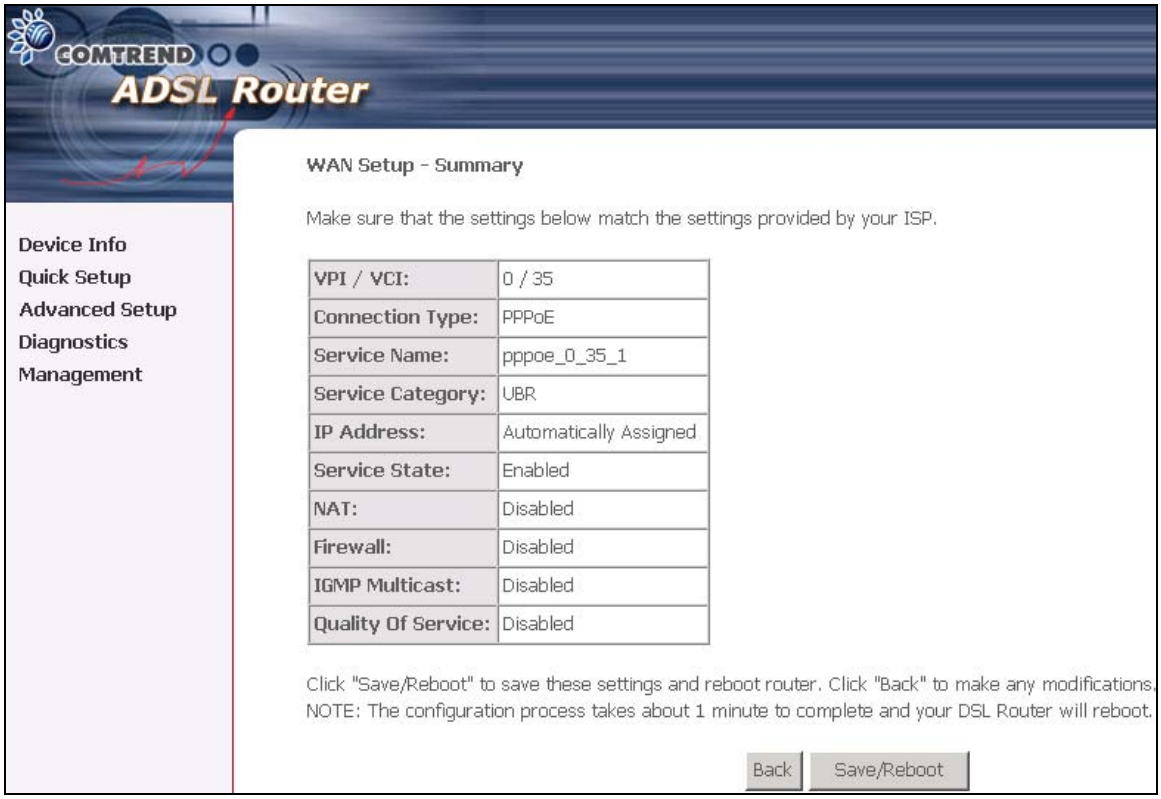
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Diagnostics
Management
WAN Setup - Summary
Make sure that the settings below match the settings provided by your ISP.
VPI / VCI: 0 / 35
Connection Type: PPPoE
Service Name: pppoe_0_35_1
Service Category: UBR
IP Address: Automatically Assigned
Service State: Enabled
NAT: Disabled
Firewall: Disabled
IGMP Multicast: Disabled
Quality Of Service: Disabled
Click "Save/Reboot" to save these settings and reboot router. Click "Back" to make any modifications.
NOTE: The configuration process takes about 1 minute to complete and your DSL Router will reboot.
Back
Save/Reboot

5. After clicking **Save/Reboot**, the router will save the configuration to the flash memory, and reboot. The Web UI will not respond until the system is brought up again. After the system is up, the Web UI will refresh to the Device Info page automatically. The CT-5611T is ready for operation and the LEDs display as described in the LED description tables.

5.2.2 MAC Encapsulation Routing (MER)

To configure MER, do the following.
1. Select **Quick Setup** and click **Next**.
2. Enter the PVC Index provided by the ISP and click **Next** and click **Next**
3. Select the MAC Encapsulation Routing (MER) radio button, and click **Next**. The following screen appears.

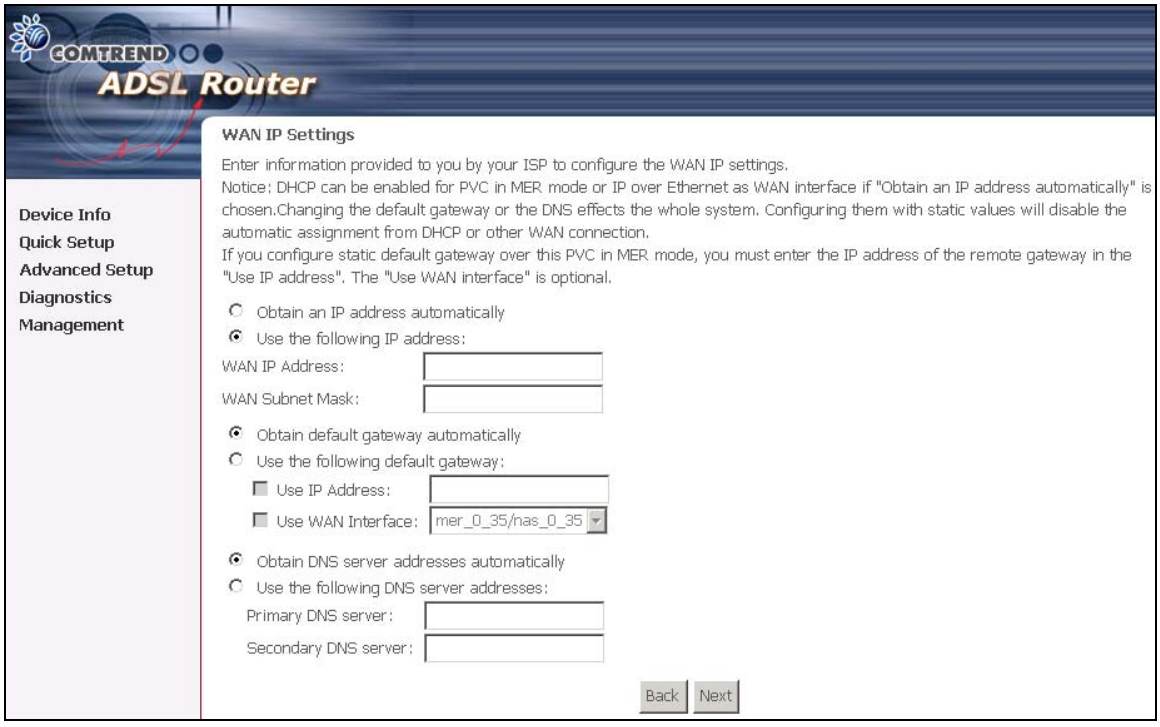
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Diagnostics
Management
WAN IP Settings
Enter information provided to you by your ISP to configure the WAN IP settings.
Notice: DHCP can be enabled for PVC in MER mode or IP over Ethernet as WAN interface if "Obtain an IP address automatically" is chosen.Changing the default gateway or the DNS effects the whole system. Configuring them with static values will disable the automatic assignment from DHCP or other WAN connection.
If you configure static default gateway over this PVC in MER mode, you must enter the IP address of the remote gateway in the "Use IP address". The "Use WAN interface" is optional.
Obtain an IP address automatically
Use the following IP address:
WAN IP Address:
WAN Subnet Mask:
Obtain default gateway automatically
Use the following default gateway:
Use IP Address:
Use WAN Interface:
mer_0_35/nas_0_35
Obtain DNS server addresses automatically
Use the following DNS server addresses:
Primary DNS server:
Secondary DNS server:
Back
Next

Enter information provided to you by your ISP to configure the WAN IP settings.

Notice: DHCP Client can be enabled for PVC in MER mode if **Obtain an IP address automatically** is chosen. Changing the default gateway or the DNS effects the whole system. Configuring them with static values will disable the automatic assignment from DHCP or other WAN connection.
If you configure static default gateway over this PVC in MER mode, you must enter the IP address of the remote gateway in the "Use IP address". The "Use WAN interface" is optional.
The ISP should provide the values that must be entered in the entry fields.

4. Click **Next** to display the following screen appears.

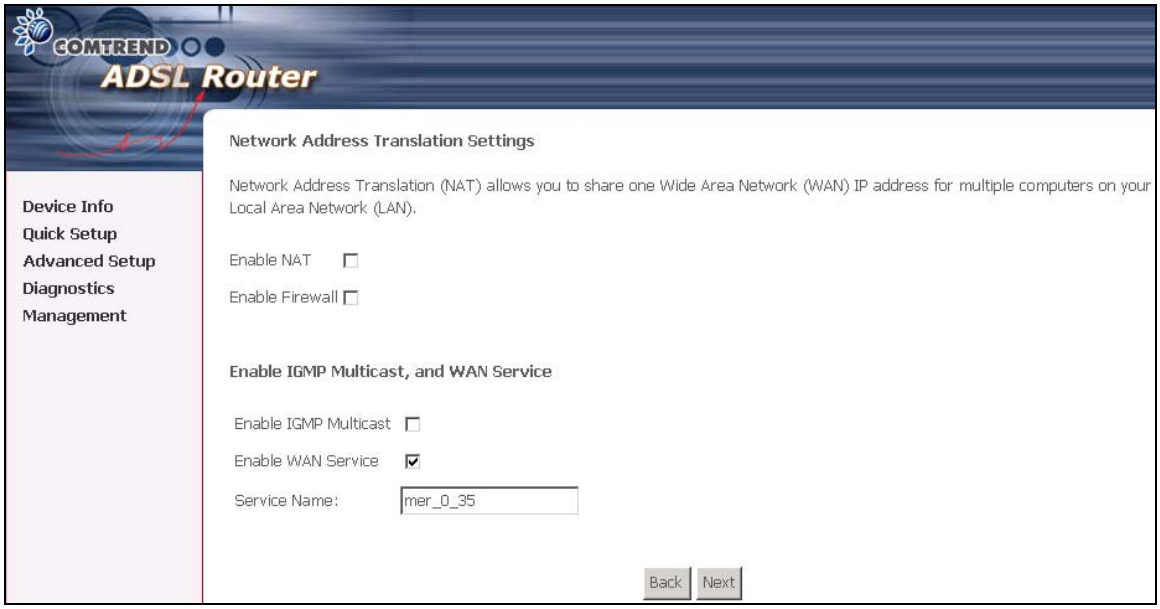

Enable NAT checkbox: If the LAN is configured with a private IP address, the user should select this checkbox. The NAT submenu on the left side main panel will be displayed after reboot. The user can then configure NAT-related features after the system comes up. If a private IP address is not used on the LAN side (i.e the LAN side is using a public IP), this checkbox should be de-selected. When the system comes back after reboot, the NAT submenu will not be displayed on the left main panel. The default setting for Mer is disabled.

Enable Firewall checkbox: If the firewall checkbox is selected, the security submenu on the left side main panel will be displayed after system reboot. The user can then configure firewall features after the system comes up. If firewall is not used, this checkbox should be de-selected to free up system resources for better performance. When system comes back after reboot, the Security submenu will not be displayed on the left main panel. The default setting for Mer is disabled.

Enable IGMP Multicast: Tick the checkbox to enable IGMP multicast (proxy). IGMP (Internet Group Membership Protocol) is a protocol used by IP hosts to report their multicast group memberships to any immediately neighboring multicast routers.

Enable WAN Service: Tick the checkbox to enable the WAN (ADSL) service. If this item is not selected, you will not be able to use the ADSL service.

Service Name: This is User-defined.

5. Upon completion, click **Next**. The following screen appears.

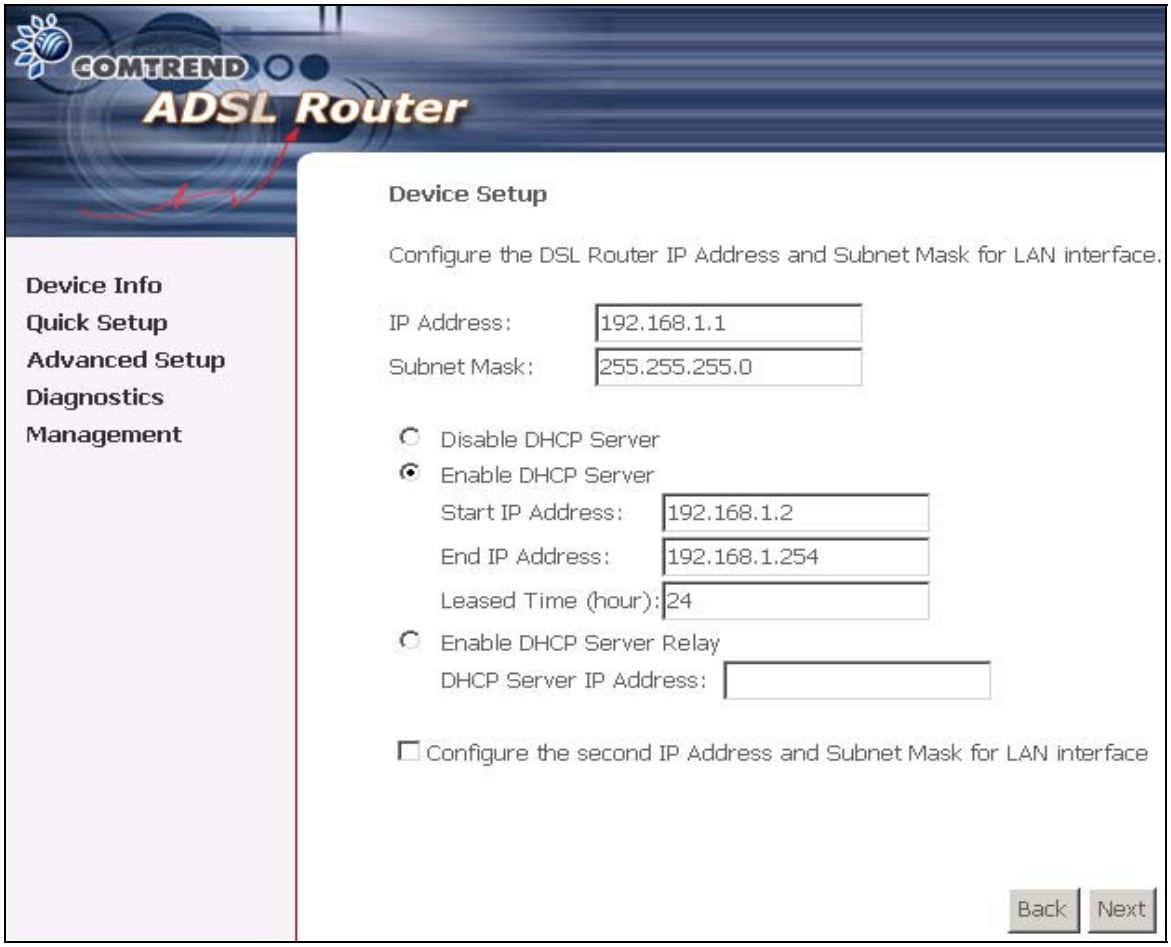

Note: If the NAT function is enabled, this DHCP Server Relay won't be displayed as an option.

The Device Setup page allows the user to configure the LAN interface IP address and DHCP server. If the user would like this ADSL router to assign dynamic IP addresses, DNS server and default gateway to other LAN devices, select the radio box **Enable DHCP server on the LAN** to enter the starting IP address and end IP address and DHCP lease time. This configures the router to automatically assign IP addresses, default gateway address and DNS server addresses to each of your PCs.

Note that the router's default IP address is 192.168.1.1 and the default private address range provided by the ISP server in the router is 192.168.1.2 through 192.168.1.254.

Select **Enable DHCP Server Relay** (if required), and enter the DHCP Server IP Address.

Note: Ethernet and USB interfaces (and the wireless LAN interface on the CT-5611T) share the same subnet since they are bridged within the router.

If the NAT function is enabled, this DHCP Server Relay won't be displayed as an option.

6. After entering your settings, select **Next** to display the following screen. The WAN Setup-Summary screen presents the entire configuration summary. Click **Save/Reboot** if the settings are correct. Click **Back** if you wish to modify the settings.

The following screen will be displayed.

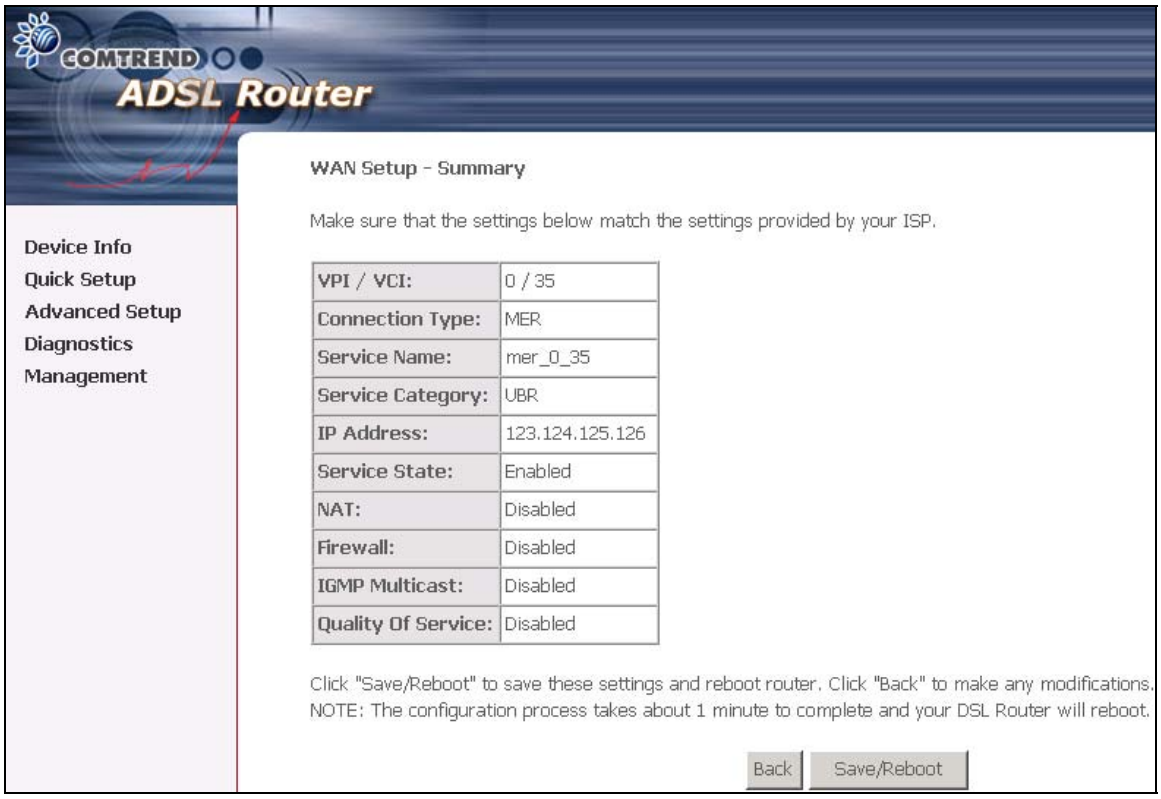
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Diagnostics
Management
WAN Setup - Summary
Make sure that the settings below match the settings provided by your ISP.
VPI / VCI: 0 / 35
Connection Type: MER
Service Name: mer_0_35
Service Category: UBR
IP Address: 123.124.125.126
Service State: Enabled
NAT: Disabled
Firewall: Disabled
IGMP Multicast: Disabled
Quality Of Service: Disabled
Click "Save/Reboot" to save these settings and reboot router. Click "Back" to make any modifications.
NOTE: The configuration process takes about 1 minute to complete and your DSL Router will reboot.
Back
Save/Reboot

After clicking **Save/Reboot**, the router will save the configuration to the flash memory, and reboot. The Web UI will not respond until the system is brought up again. After the system is up, the Web UI will refresh to the Device Info page automatically. The CT-5611T is ready for operation and the LEDs display as described in the LED description tables.

5.2.3 IP Over ATM

To configure IP Over ATM,
1. Select **Quick Setup** and click **Next**.
2. Enter the PVC Index and click **Next**.
3. Type the VPI and VCI values provided by the ISP and click **Next**.
4. Select the IP over ATM (IPoA) radio button and click **Next**. The following screen appears.

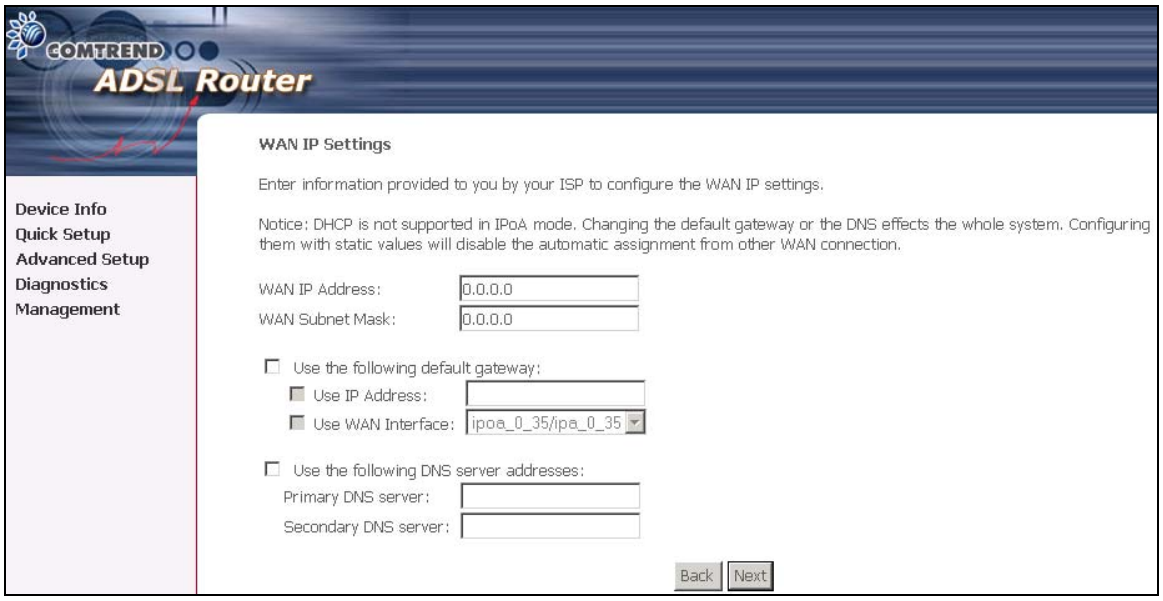
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Diagnostics
Management
WAN IP Settings
Enter information provided to you by your ISP to configure the WAN IP settings.
Notice: DHCP is not supported in IPoA mode. Changing the default gateway or the DNS effects the whole system. Configuring them with static values will disable the automatic assignment from other WAN connection.
WAN IP Address:
0.0.0.0
WAN Subnet Mask:
0.0.0.0
Use the following default gateway:
Use IP Address:
Use WAN Interface:
ipoa_0_35/ipa_0_35
Use the following DNS server addresses:
Primary DNS server:
Secondary DNS server:
Back
Next

Notice that DHCP is not supported over IPoA. The user must enter the IP address or WAN interface for the default gateway setup, and the DNS server addresses provided by the ISP.

5. Click **Next**. The following screen appears.

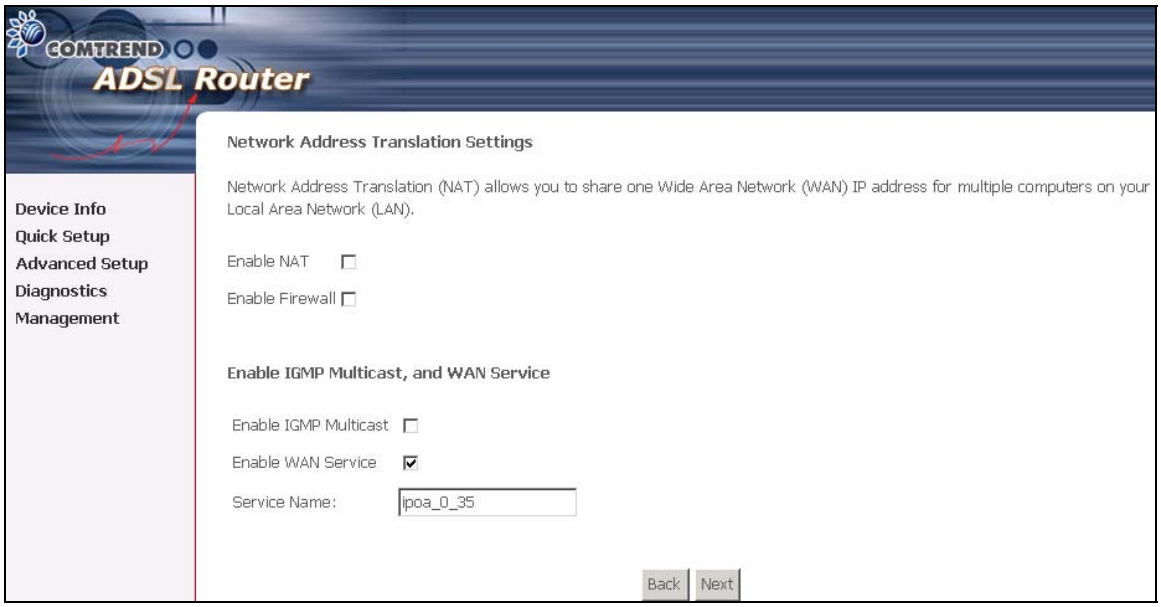

Enable NAT checkbox
If the LAN is configured with a private IP address, the user should select this checkbox. The NAT submenu on the left side main panel will be displayed after reboot. The user can then configure NAT-related features after the system comes up. If a private IP address is not used on the LAN side (i.e the LAN side is using a public IP), this checkbox should be de-selected. When the system comes back after reboot, the NAT submenu will not be displayed on the left main panel. The default setting for Mer is disabled.

Enable Firewall checkbox
If the firewall checkbox is selected, the security submenu on the left side main panel will be displayed after system reboot. The user can then configure firewall features after the system comes up. If firewall is not used, this checkbox should be de-selected to free up system resources for better performance. When system comes back after reboot, the Security submenu will not be displayed on the left main panel. The default setting for Mer is disabled.

Enable Quality Of Service
Enabling IP QoS for a PVC improves performance for selected classes of applications. However, since IP QoS also consumes system resources, the number of PVCs will be reduced consequently. Use **Advanced Setup/Quality of Service** to assign priorities for the applications.

6. Click **Next** to display the following screen. The Device Setup page allows the user to configure the LAN interface IP address and DHCP server if the user would like this ADSL router to assign dynamic IP addresses, DNS server and default gateway to other LAN devices. Select the button Enable DHCP server on the LAN to enter the starting IP address and end IP address and DHCP lease time.

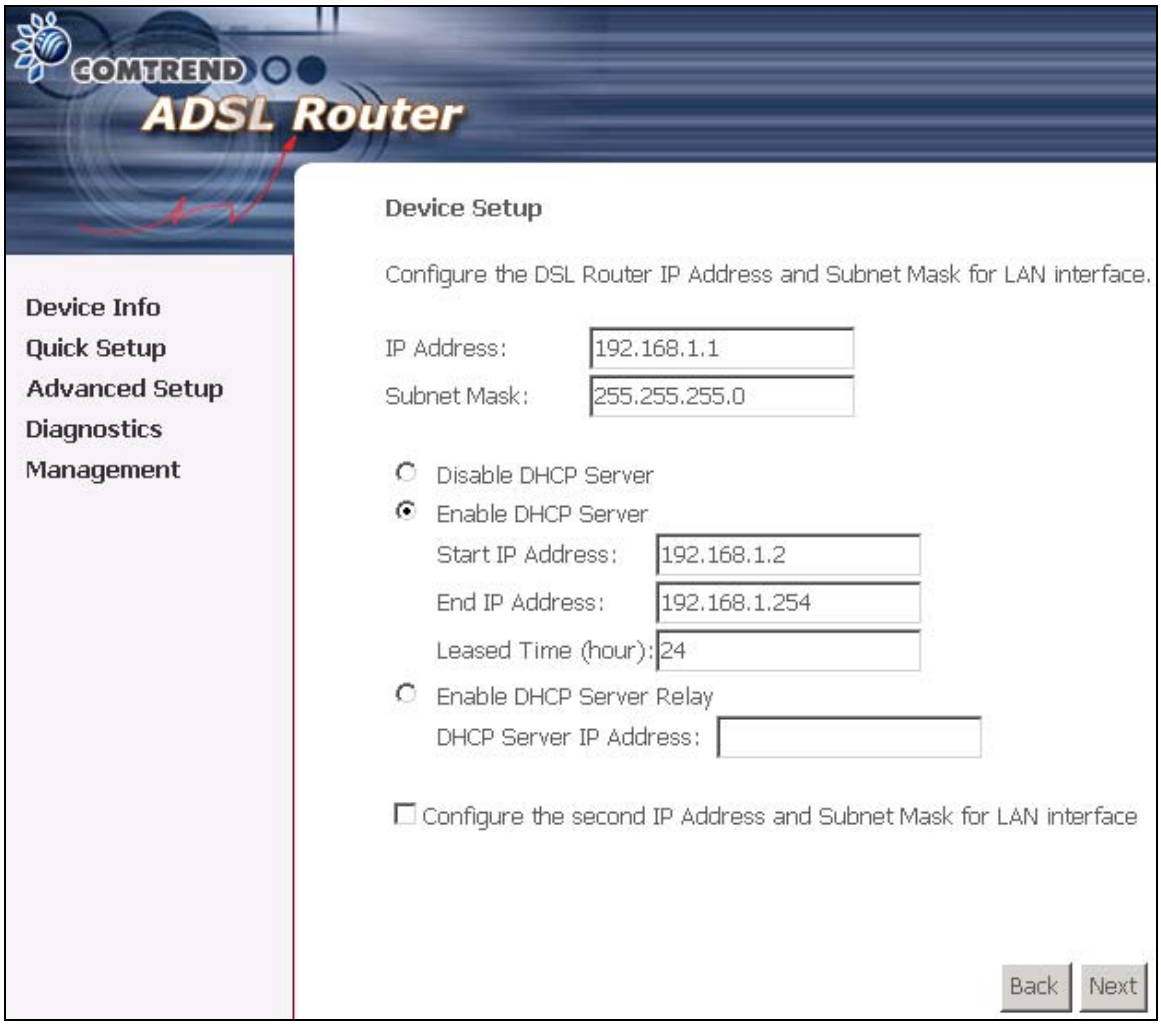

The user must configure the IP Address and the Subnet Mask. To use the DHCP service on the LAN, select the **Enable DHCP server** checkbox, and enter the Start IP addresses, the End IP address and DHCP lease time. This configures the router to automatically assign IP addresses, default gateway address and DNS server addresses to each of your PCs.

Select **Enable DHCP Server Relay** (if required), and enter the DHCP Server IP Address.

Note that the router's default IP address is 192.168.1.1 and the default private address range provided by ISP server in the router is 192.168.1.2 through 192.168.1.254.

7. The WAN Setup-Summary screen presents the entire configuration summary. Click **Save/Reboot** if the settings are correct. Click **Back** if you wish to modify the settings.

The following screen will be displayed.

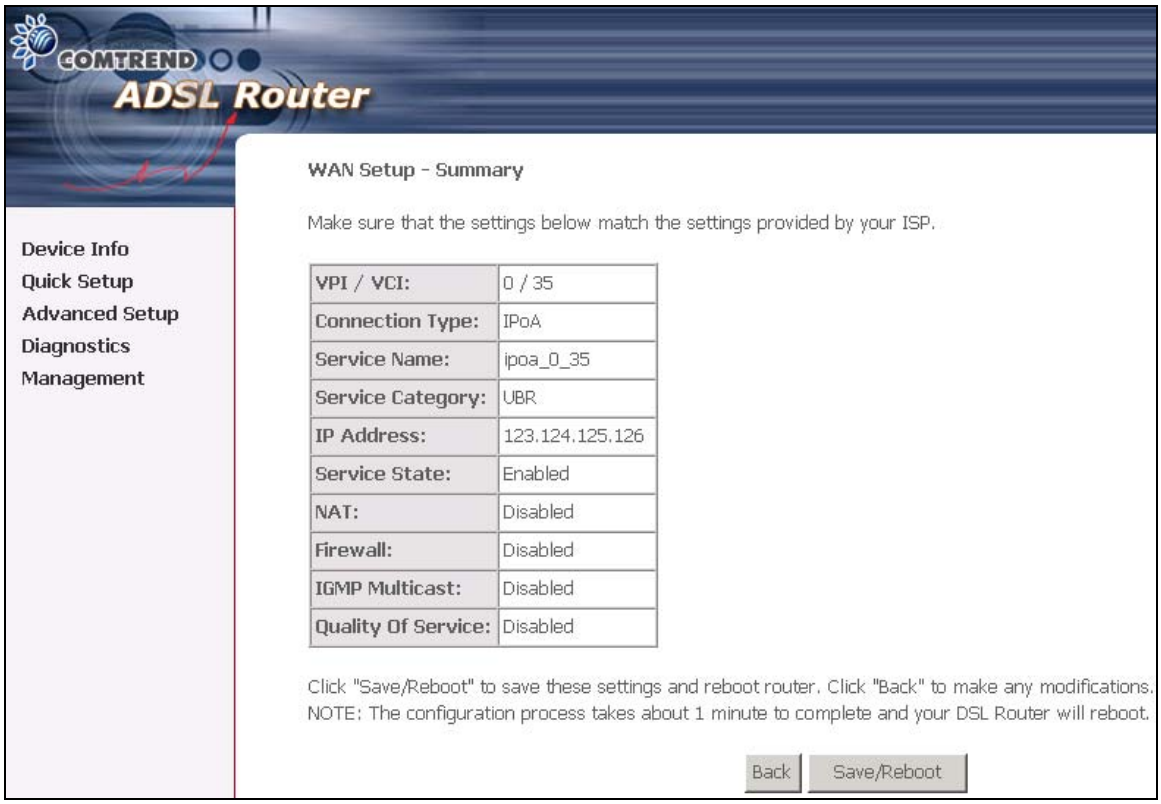
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Diagnostics
Management
WAN Setup - Summary
Make sure that the settings below match the settings provided by your ISP.
VPI / VCI: 0 / 35
Connection Type: IPoA
Service Name: ipoa_0_35
Service Category: UBR
IP Address: 123.124.125.126
Service State: Enabled
NAT: Disabled
Firewall: Disabled
IGMP Multicast: Disabled
Quality Of Service: Disabled
Click "Save/Reboot" to save these settings and reboot router. Click "Back" to make any modifications.
NOTE: The configuration process takes about 1 minute to complete and your DSL Router will reboot.
Back
Save/Reboot

8. After clicking **Save/Reboot**, the router will save the configuration to the flash memory, and reboot. The Web UI will not respond until the system is brought up again. After the system is up, the Web UI will refresh to the Device Info page automatically. The CT-5611T is ready for operation and the LEDs display as described in the LED description tables.

5.2.4 Bridging

Select the bridging mode. To configure Bridging, do the following.

1. Select Quick Setup and click **Next**.
2. Enter the PVC Index and click **Next**.
3. Type in the VPI and VCI values provided by the ISP and click Next.
4. Select the Bridging radio button and click **Next**. The following screen appears. To use the bridge service, tick the checkbox, Enable Bridge Service, and enter the service name.

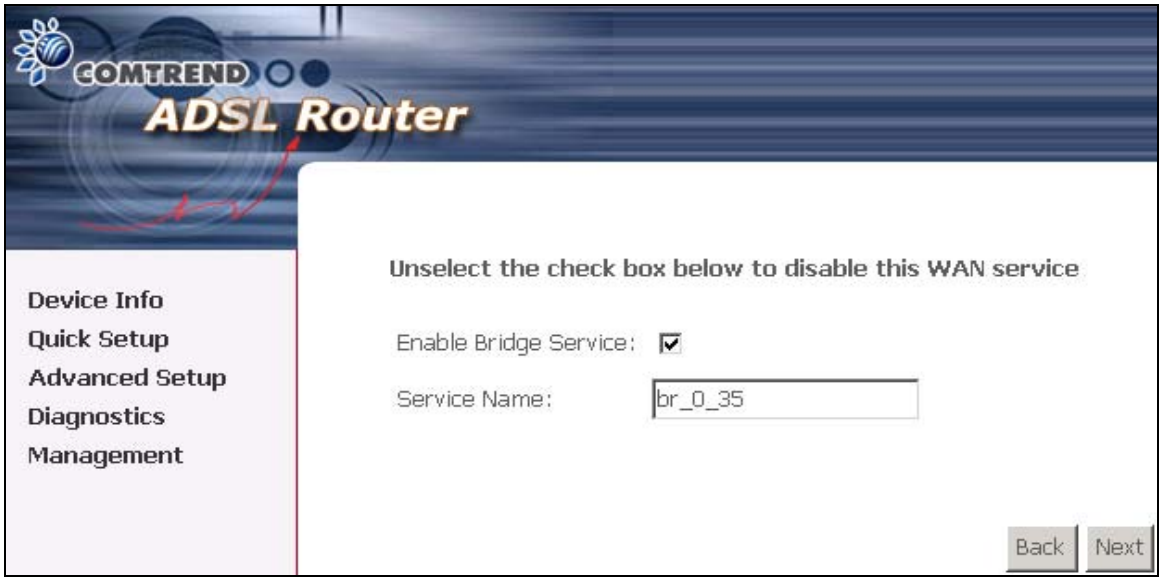

5. Click the **Next** button to continue. Enter the IP address for the LAN interface. The default IP address is 192.168.1.1. The LAN IP interface in bridge operating mode is needed for local users to manage the ADSL router. Notice that there is no IP address for the WAN interface in bridge mode, and the remote technical support cannot access the ADSL router.

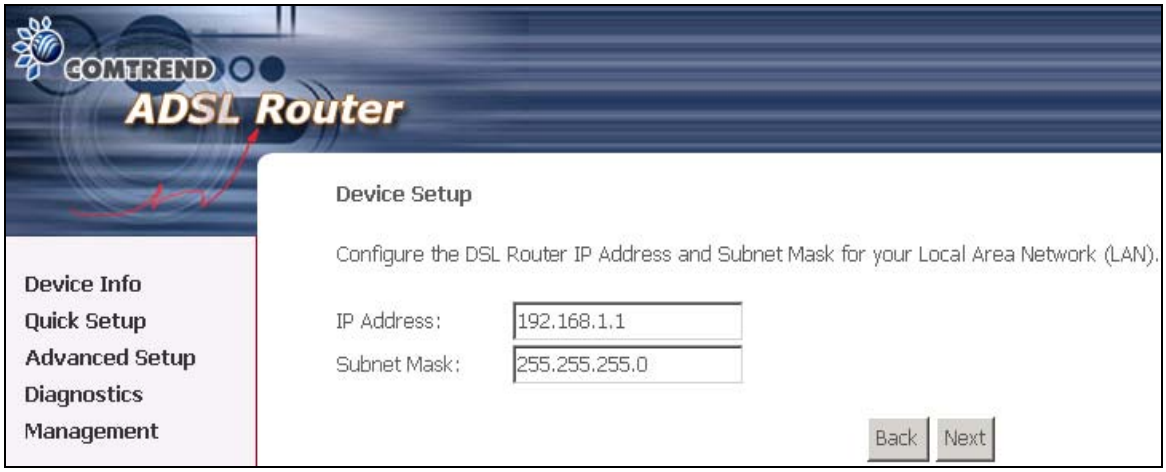

6. Click the **Next** button

The following screen will be displayed.

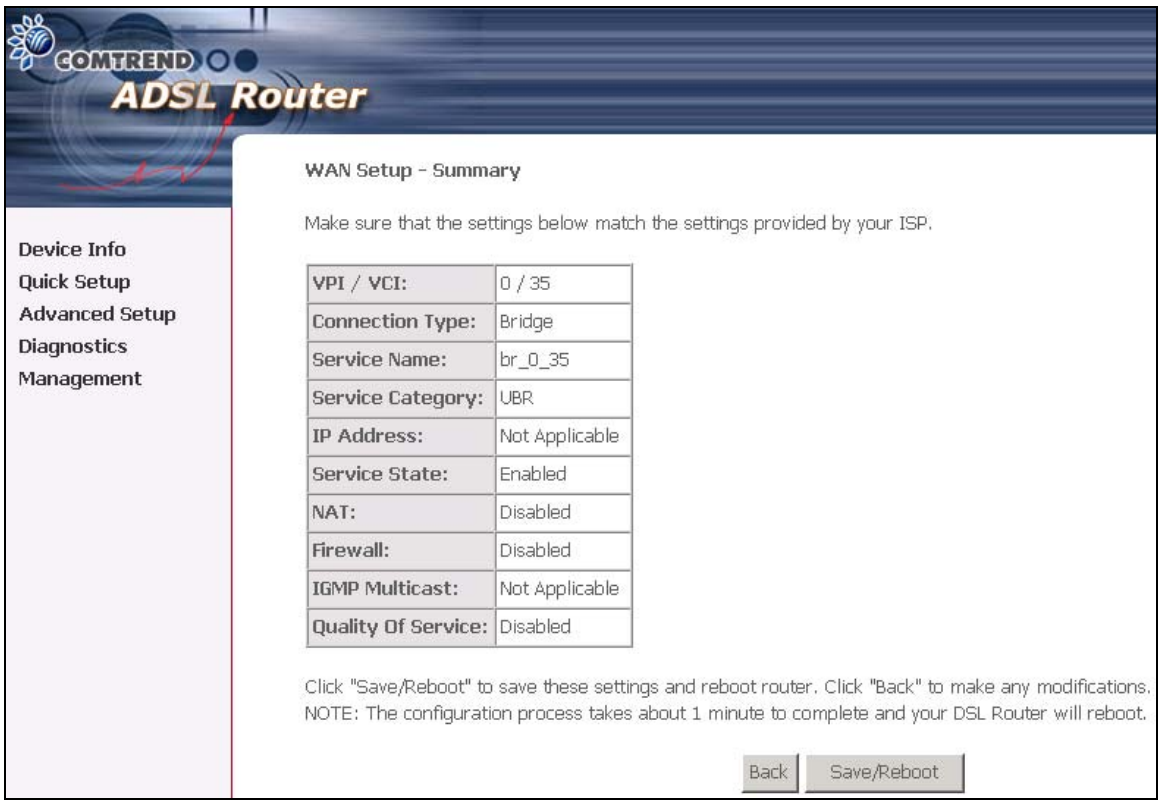
COMTREND
ADSL Router
Device Info
Quick Setup
Advanced Setup
Diagnostics
Management
WAN Setup - Summary
Make sure that the settings below match the settings provided by your ISP.
VPI / VCI: 0 / 35
Connection Type: Bridge
Service Name: br_0_35
Service Category: UBR
IP Address: Not Applicable
Service State: Enabled
NAT: Disabled
Firewall: Disabled
IGMP Multicast: Not Applicable
Quality Of Service: Disabled
Click "Save/Reboot" to save these settings and reboot router. Click "Back" to make any modifications.
NOTE: The configuration process takes about 1 minute to complete and your DSL Router will reboot.
Back
Save/Reboot

The WAN Setup-Summary screen presents the entire configuration summary. Click **Save/Reboot** if the settings are correct. Click **Back** if you wish to modify the settings.

Chapter 6 Advanced Setup

This chapter explains: WAN, LAN, Routing, DSL and Port Mapping……

Note: Shown below for your reference are the available menu options for each different configuration.

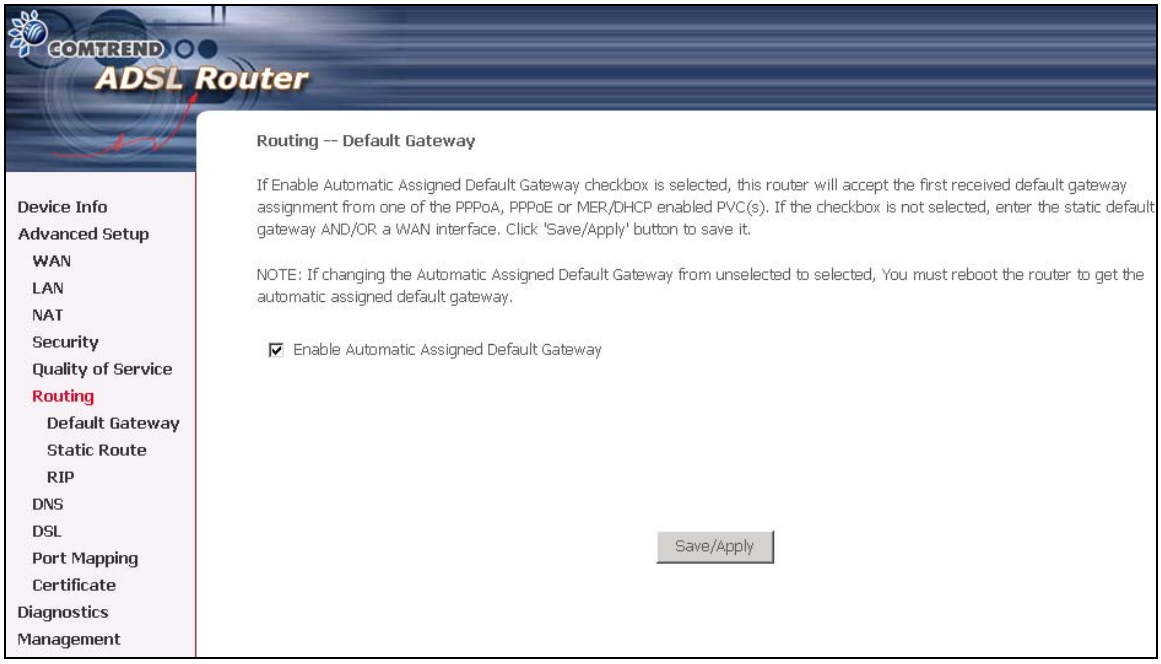
COMTREND
ADSL Router
Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
Default Gateway
Static Route
RIP
DNS
DSL
Port Mapping
Certificate
Diagnostics
Management
Routing -- Default Gateway
If Enable Automatic Assigned Default Gateway checkbox is selected, this router will accept the first received default gateway assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s). If the checkbox is not selected, enter the static default gateway AND/OR a WAN interface. Click 'Save/Apply' button to save it.
NOTE: If changing the Automatic Assigned Default Gateway from unselected to selected, You must reboot the router to get the automatic assigned default gateway.
Enable Automatic Assigned Default Gateway
Save/Apply

This screenshot is for PPPoE and PPPoA encapsulations.

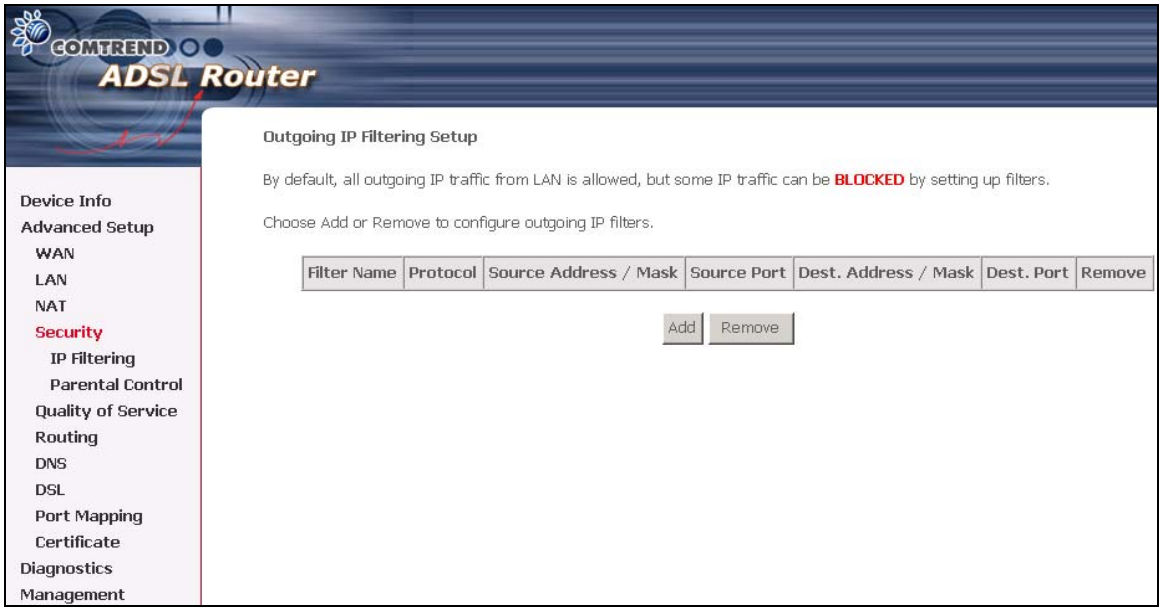

This screenshot is for Mer and IPoA encapsulations.

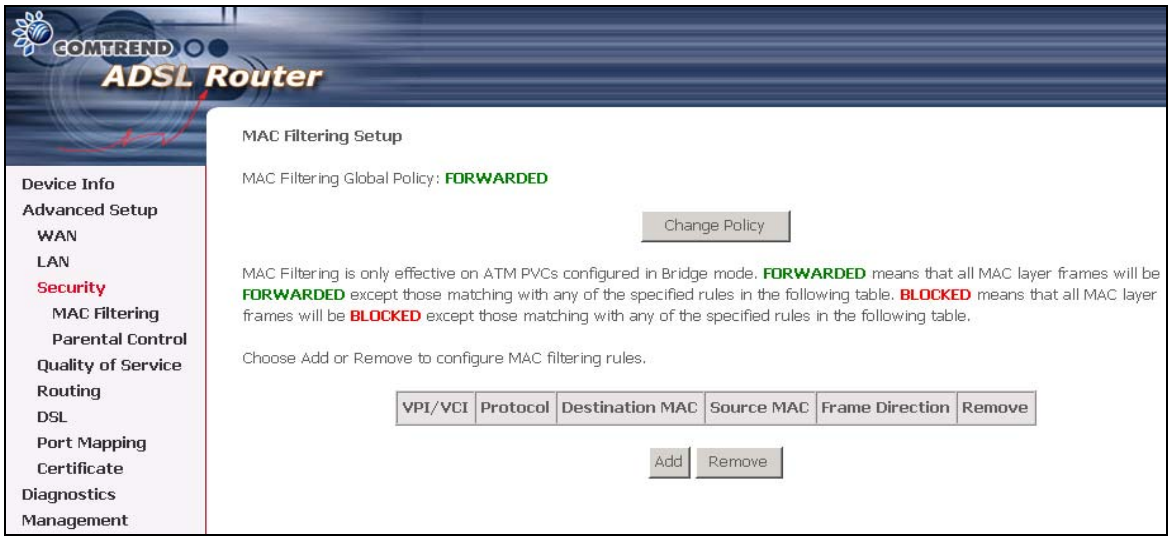

This screenshot is for Bridge encapsulation.

6.1 WAN

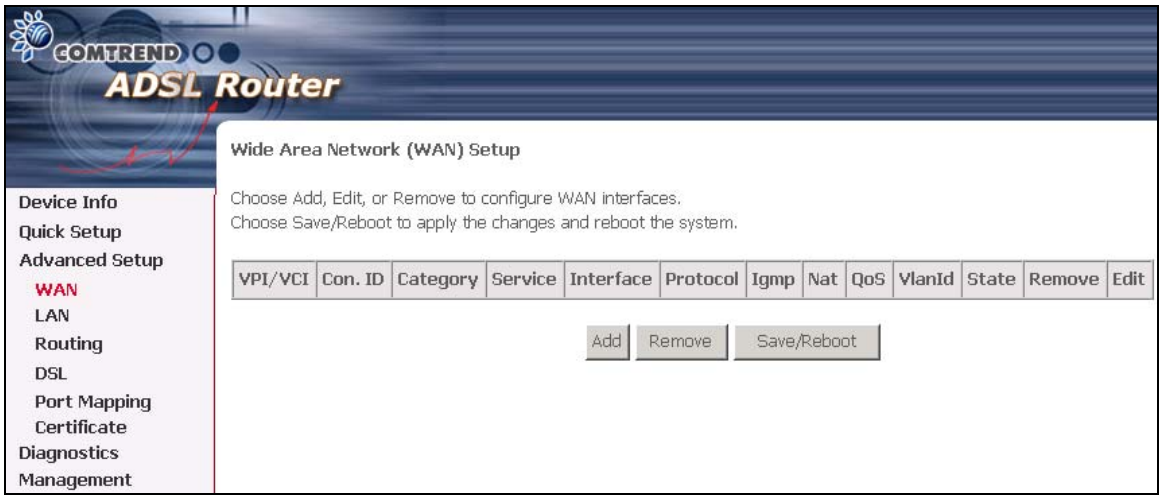

VlanID	• This function means one can add an 802.1Q VLAN tag on PPPoE/MER or Bridge mode. It means the packets are sent to WAN and a specific VlanID (802.1Q tag) will be added in the Ethernet header. The VlanID shows which 802.1Q tag will be added.

For further information on WAN, please reference section: 4.1, Page 26.

6.2 LAN

Configure the DSL Router IP Address and Subnet Mask for LAN interface. Save button only saves the LAN configuration data. Save/Reboot button saves the LAN configuration data and reboots the router to make the new configuration effective.

IP Address: Enter the IP address for the LAN port.
Subnet Mask: Enter the subnet mask for the LAN port.

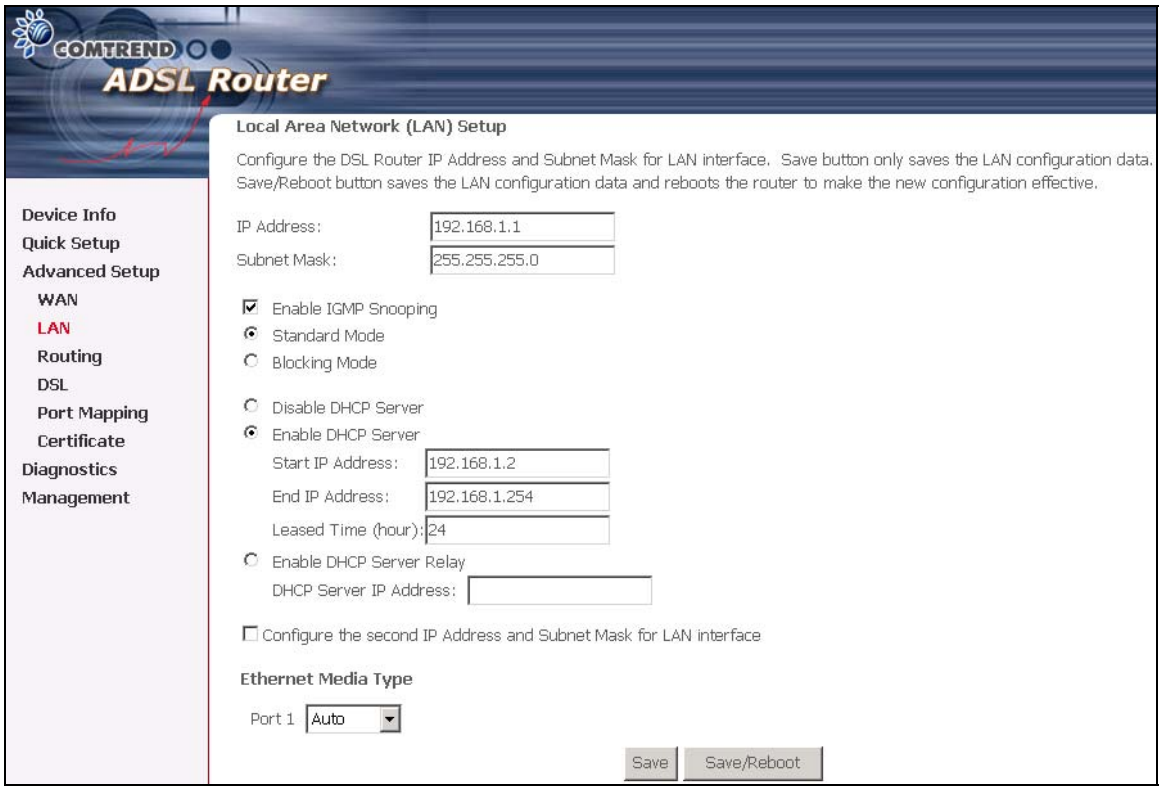

Enable IGMP Snooping: Enable /Disable the function that is IGMP Snooping.

Standard Mode: In standard mode, as in all prior releases, multicast traffic will flood to all bridge ports when there is no client subscribes to any multicast group – even when IGMP snooping is enabled.

Blocking Mode: In blocking mode, the multicast data traffic will be blocked and not flood to all bridge ports when there is no client subscription to any multicast group.

Ethernet Media Type: Select between Auto, 10_Half, 10_Full, 100_Half and 100_Full options.

To configure a secondary IP address for the LAN port, click the box as shown below.

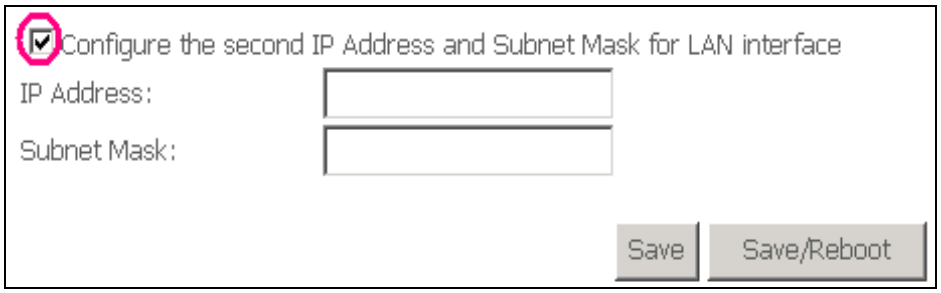

IP Address: Enter the secondary IP address for the LAN port.
Subnet Mask: Enter the secondary subnet mask for the LAN port.

6.3 NAT

To display the NAT function, you need to enable the NAT feature in the WAN Setup.

6.3.1 Virtual Servers

Virtual Server allows you to direct incoming traffic from WAN side (identified by Protocol and External port) to the Internal server with private IP address on the LAN side. The Internal port is required only if the external port needs to be converted to a different port number used by the server on the LAN side. A maximum 32 entries can be configured.

To add a Virtual Server, simply click the Add button. The following will be displayed.

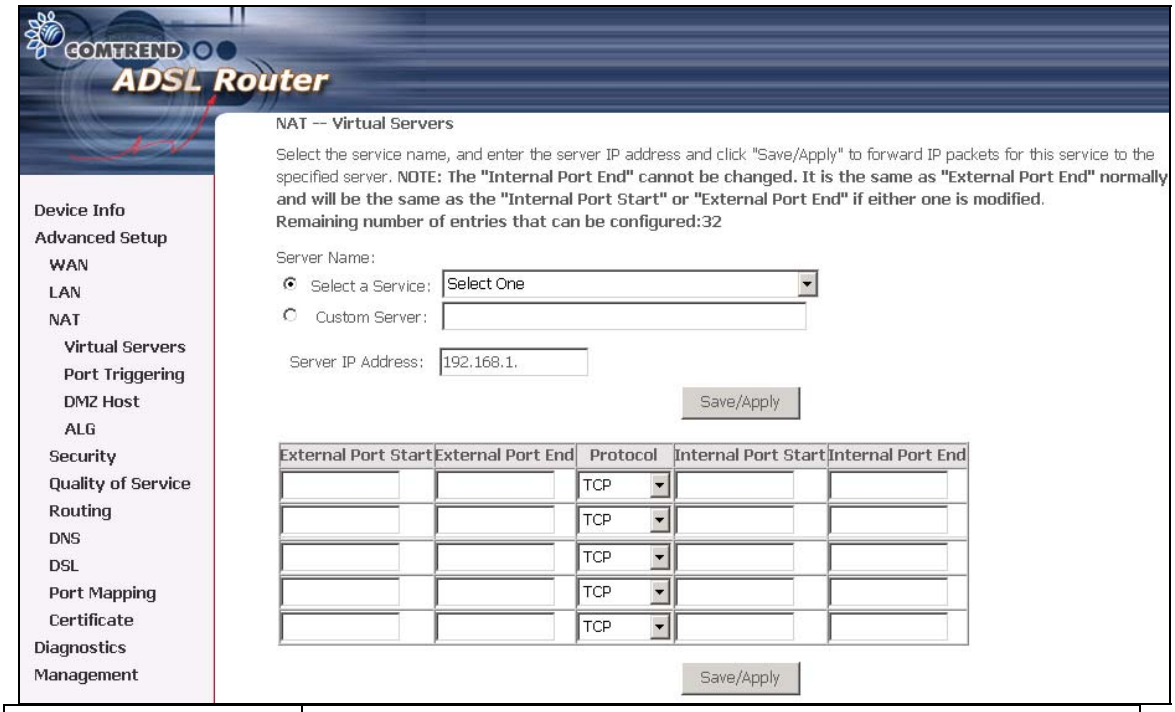

Select a Service Or Custom Server	User should select the service from the list. Or User can enter the name of their choice.
Server IP Address	Enter the IP address for the server.
External Port Start	Enter the starting external port number (when you select Custom Server). When a service is selected the port ranges are automatically configured.
External Port End	Enter the ending external port number (when you select Custom Server). When a service is selected the port ranges are automatically configured.
Protocol	User can select from: TCP, TCP/UDP or UDP.
Internal Port Start	Enter the internal port starting number (when you select Custom Server). When a service is selected the port ranges are automatically configured
Internal Port End	Enter the internal port ending number (when you select Custom Server). When a service is selected the port ranges are automatically configured.

6.3.2 Port Triggering

Some applications require that specific ports in the Router's firewall be opened for access by the remote parties. Port Trigger dynamically opens up the 'Open Ports' in the firewall when an application on the LAN initiates a TCP/UDP connection to a remote party using the 'Triggering Ports'. The Router allows the remote party from the WAN side to establish new connections back to the application on the LAN side using the 'Open Ports'. A maximum 32 entries can be configured.

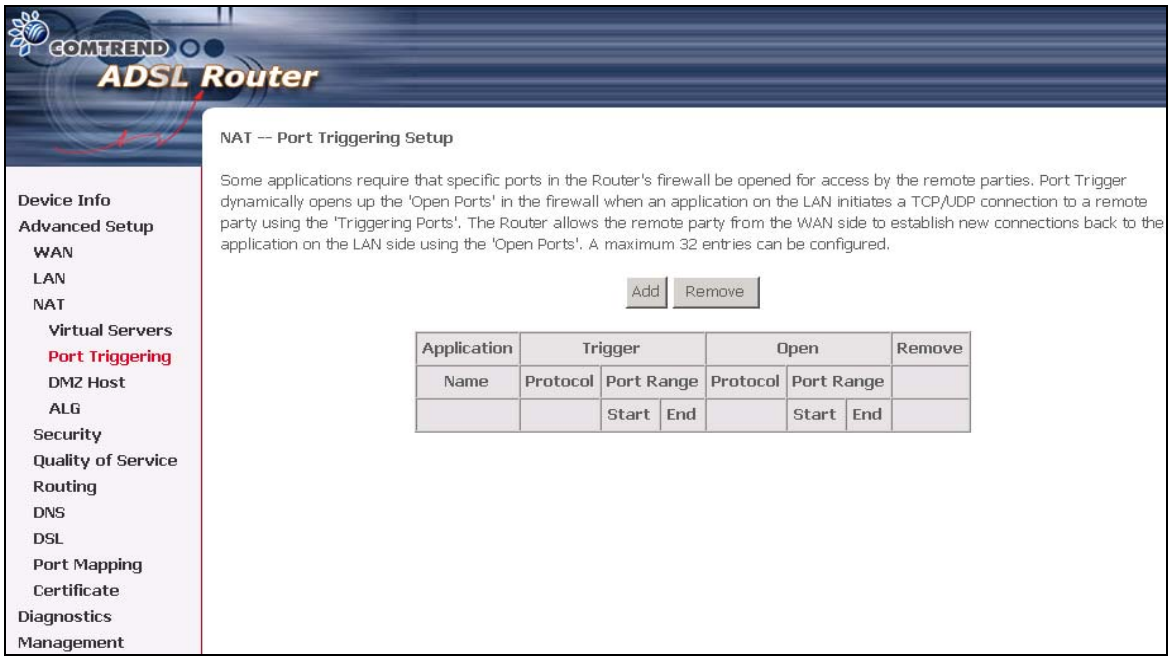

To add a Trigger Port, simply click the Add button. The following will be displayed.

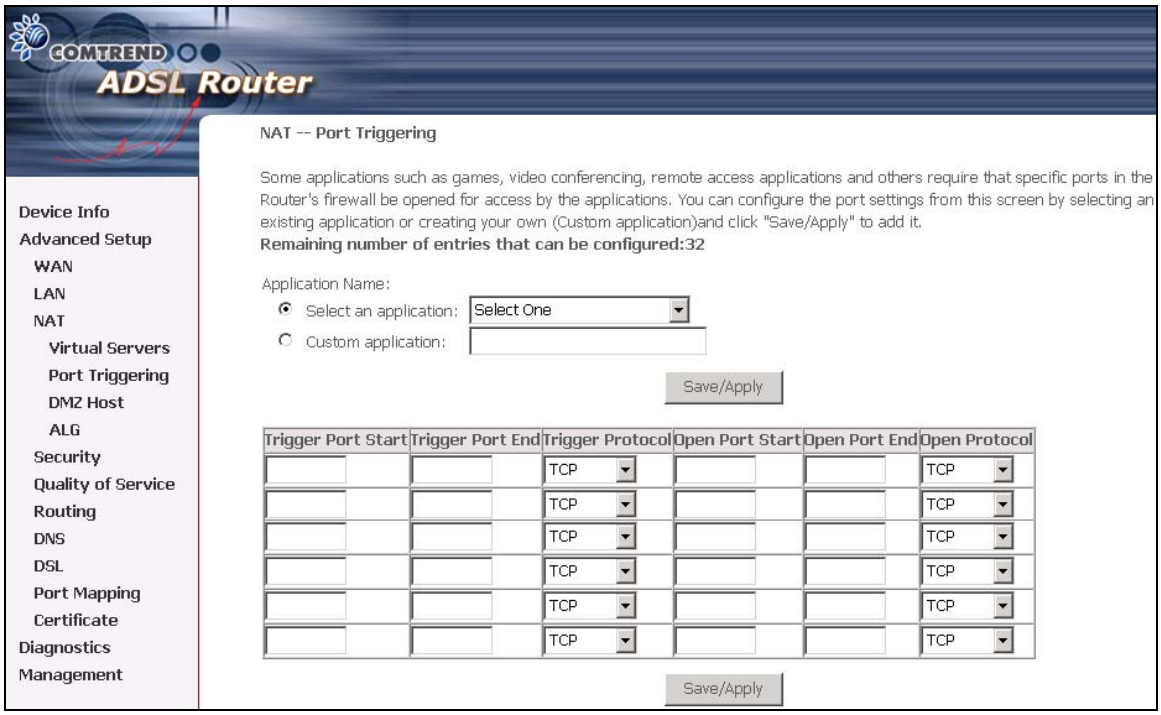

Select an Application Or Custom Application	User should select the application from the list. Or User can enter the name of their choice.
Trigger Port Start	Enter the starting trigger port number (when you select custom application). When an application is selected the port ranges are automatically configured.
Trigger Port End	Enter the ending trigger port number (when you select custom application). When an application is selected the port ranges are automatically configured.
Trigger Protocol	User can select from: TCP, TCP/UDP or UDP.
Open Port Start	Enter the starting open port number (when you select custom application). When an application is selected the port ranges are automatically configured.
Open Port End	Enter the ending open port number (when you select custom application). When an application is selected the port ranges are automatically configured.
Open Protocol	User can select from: TCP, TCP/UDP or UDP.

6.3.3 DMZ Host

The DSL router will forward IP packets from the WAN that do not belong to any of the applications configured in the Virtual Servers table to the DMZ host computer.

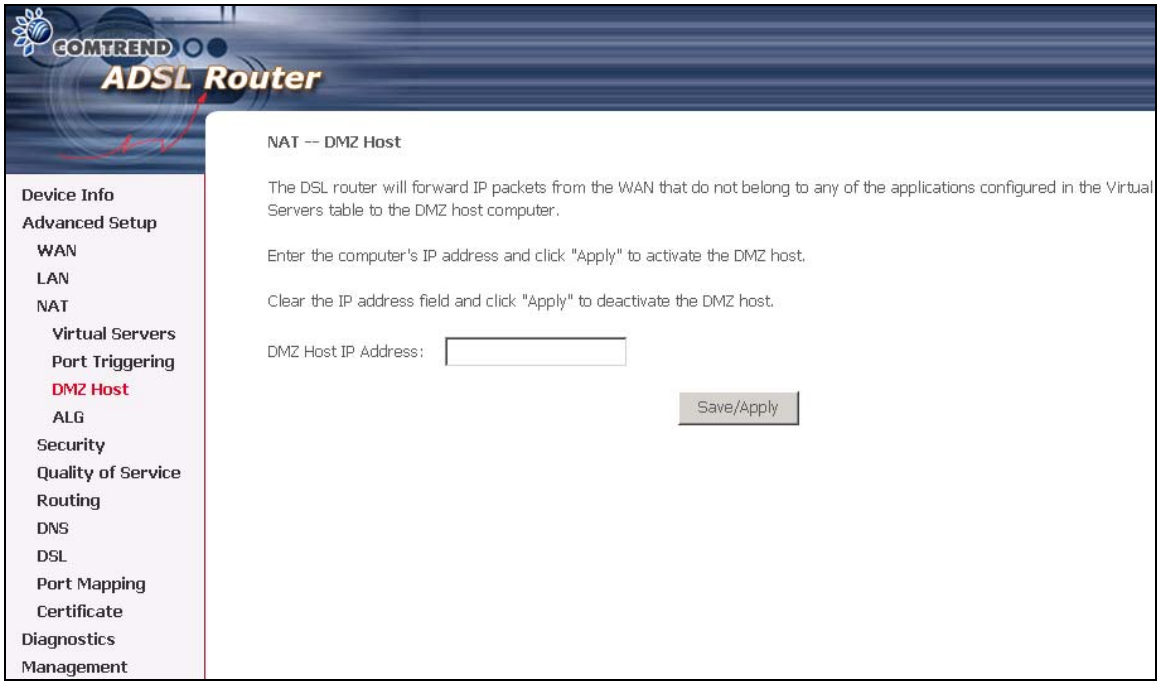

Enter the computer's IP address and click "Apply" to activate the DMZ host.

Clear the IP address field and click "Apply" to deactivate the DMZ host.

6.3.4 ALG

SIP ALG is Application layer gateway. If the user has an IP phone(SIP) or VoIP gateway(SIP) behind the ADSL router, the SIP ALG can help VoIP packet passthrough the router (NAT enabled).

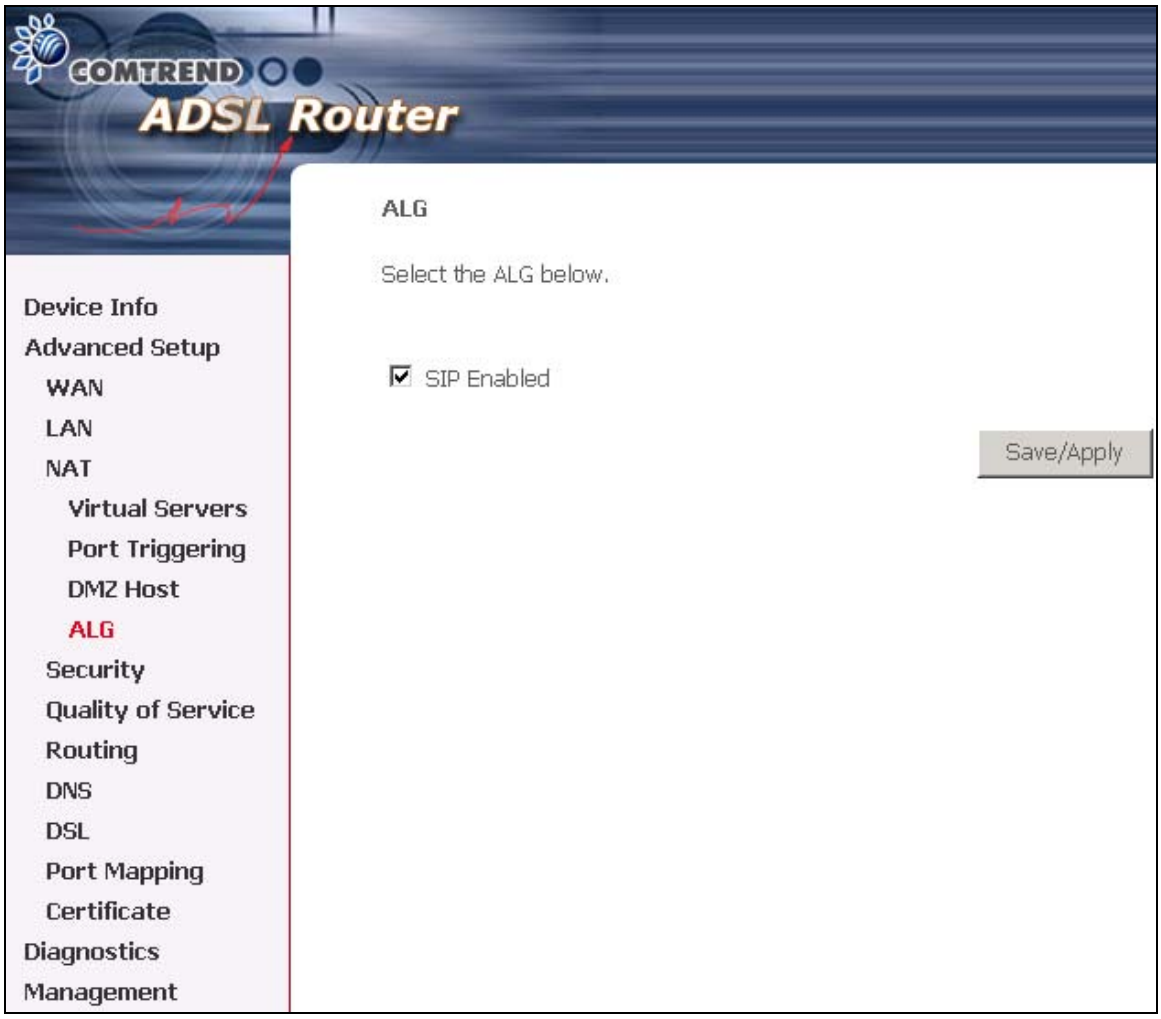

Note: SIP (Session Initiation Protocol, RFC3261) is the protocol of choice for most VoIP (Voice over IP) phones to initiate communication. This ALG is only valid for SIP protocol running UDP port 5060.

6.4 Security

To display the Security function, you need to enable the firewall feature in the WAN Setup.

6.4.1 IP Filtering

IP filtering allows you to create a filter rule to identify outgoing/incoming IP traffic by specifying a new filter name and at least one condition below. All of the specified conditions in this filter rule must be satisfied for the rule to take effect. Click 'Save/Apply' to save and activate the filter.

Outgoing

Note: The default setting for Outgoing is Accepted.

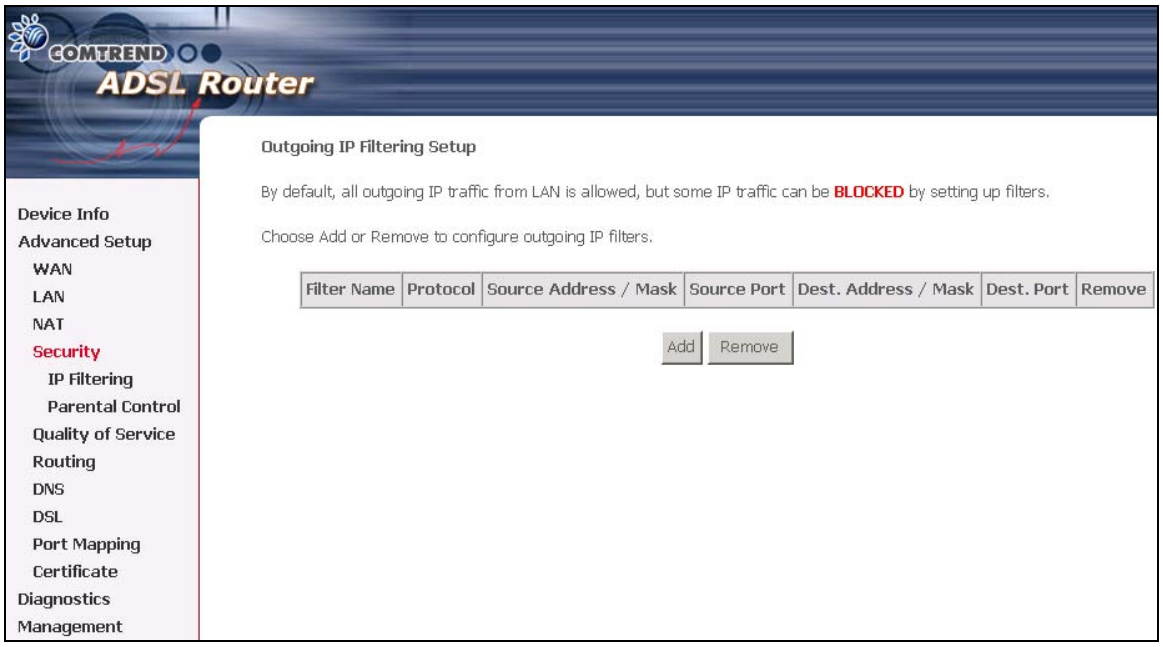

To add a filtering rule, simply click the Add button. The following screen will be displayed.

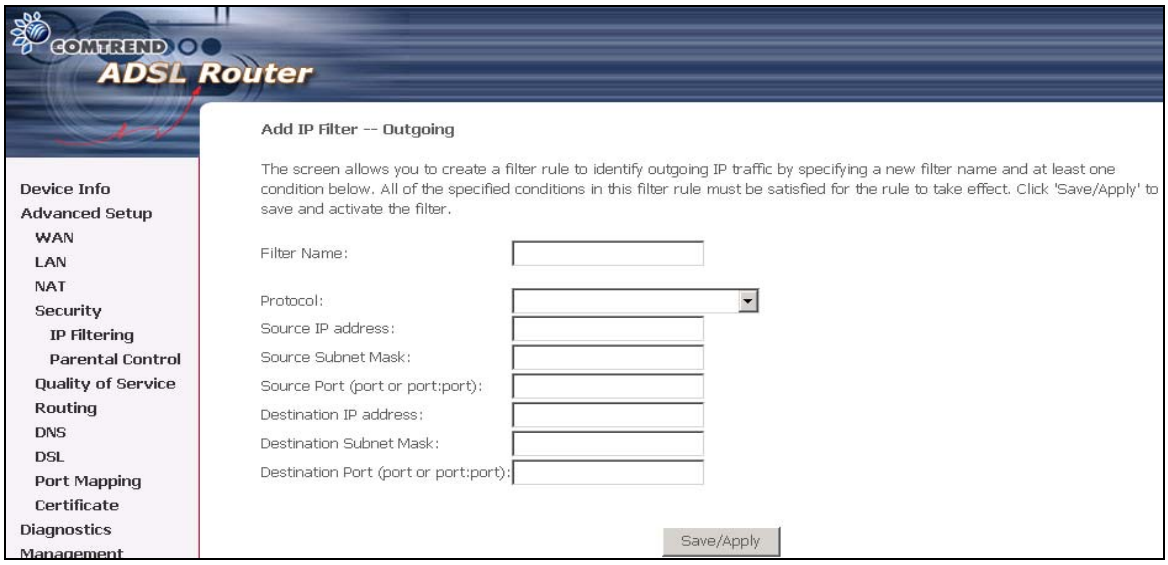

Filter Name	Type a name for the filter rule.
Protocol	User can select from: TCP, TCP/UDP, UDP or ICMP.
Source IP address	Enter source IP address.
Source Subnet Mask	Enter source subnet mask.
Source Port (port or port:port)	Enter source port number.
Destination IP address	Enter destination IP address.
Destination Subnet Mask	Enter destination subnet mask.
Destination port (port or port:port)	Enter destination port number.

Incoming

Note: The default setting for Incoming is Blocked.

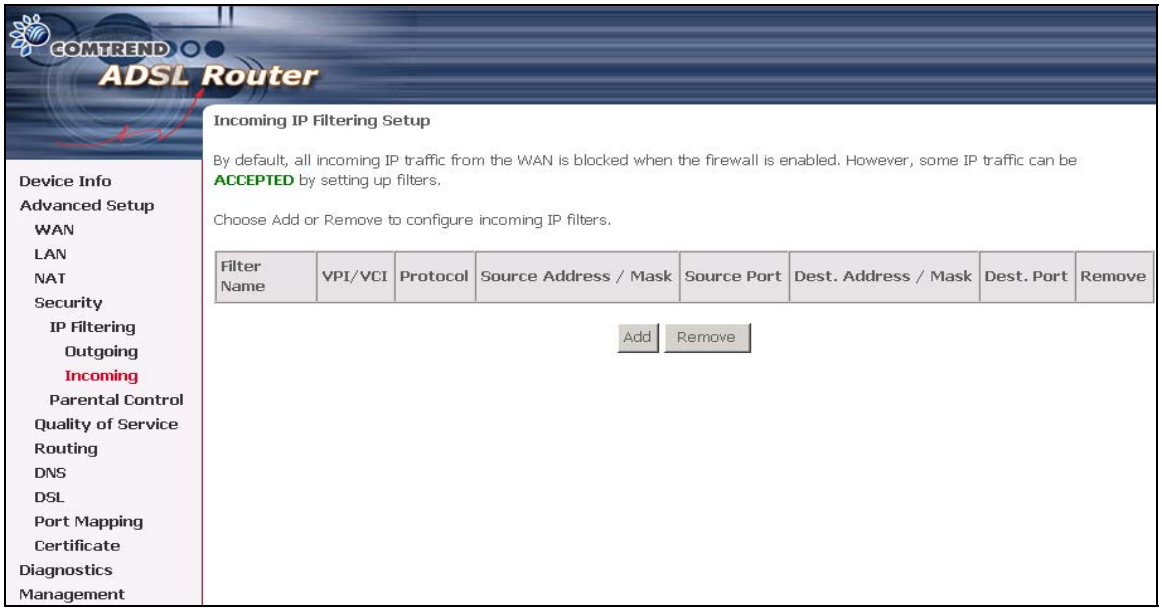

To add a filtering rule, simply click the Add button. The following screen will be displayed.

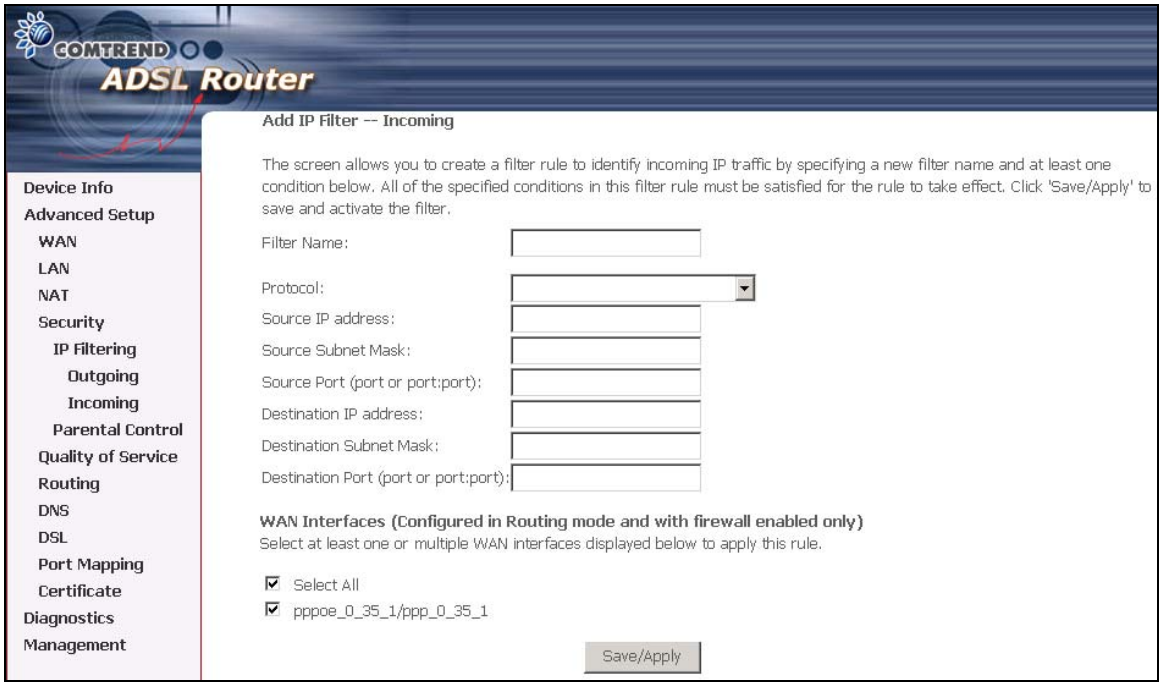
COMTREND
ADSL Router
Device Info
Advanced Setup
WAN
LAN
NAT
Security
IP Filtering
Outgoing
Incoming
Parental Control
Quality of Service
Routing
DNS
DSL
Port Mapping
Certificate
Diagnostics
Management
Add IP Filter -- Incoming
The screen allows you to create a filter rule to identify incoming IP traffic by specifying a new filter name and at least one condition below. All of the specified conditions in this filter rule must be satisfied for the rule to take effect. Click 'Save/Apply' to save and activate the filter.
Filter Name:
Protocol:
Source IP address:
Source Subnet Mask:
Source Port (port or port:port):
Destination IP address:
Destination Subnet Mask:
Destination Port (port or port:port):
WAN Interfaces (Configured in Routing mode and with firewall enabled only)
Select at least one or multiple WAN interfaces displayed below to apply this rule.
Select All
pppoe_0_35_1/ppp_0_35_1
Save/Apply

To configure the parameters, please reference **Outgoing** table above.

6.4.2 Parental Control

Parental control: allows parents, schools, and libraries to set access times for Internet use.

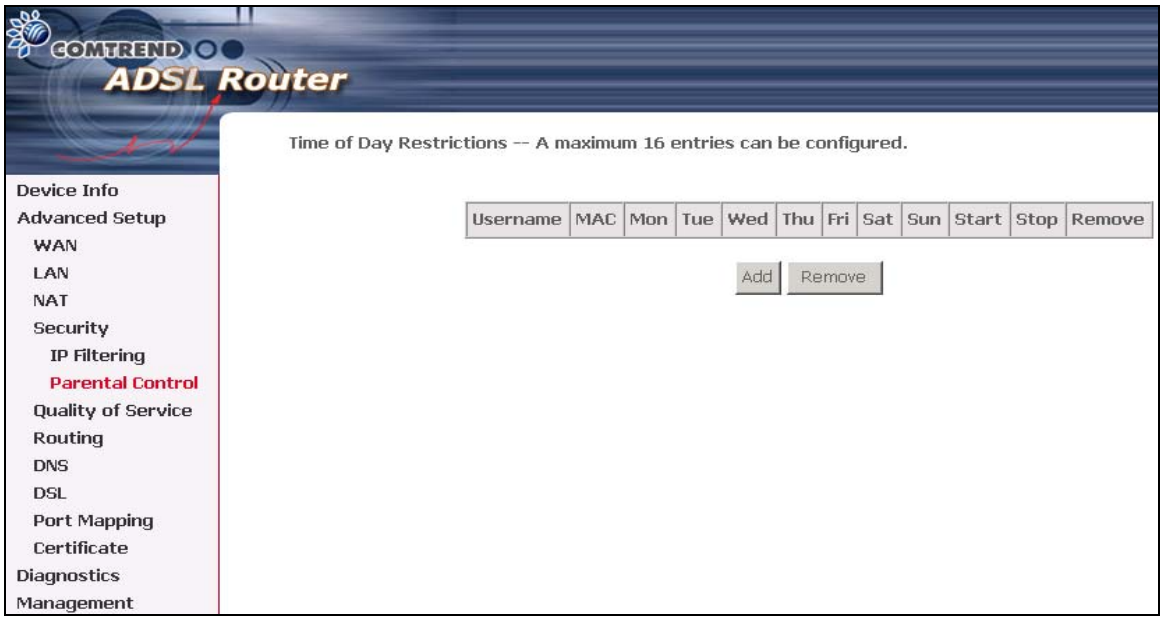

To add a parental control, simply click the Add button. The following screen will be displayed.

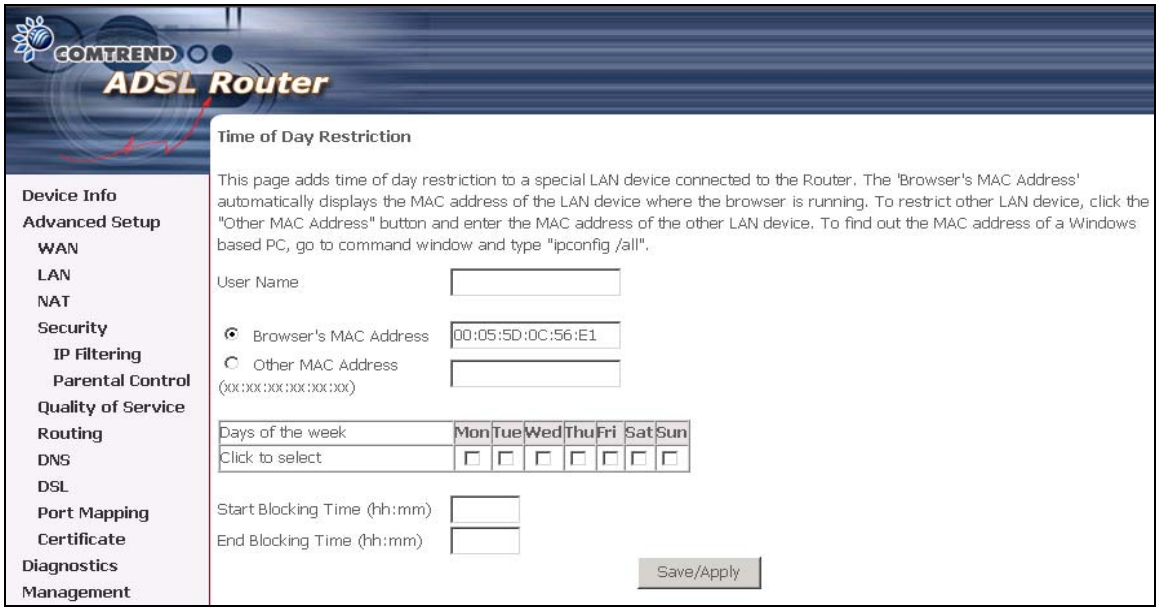
COMTREND
ADSL Router
Time of Day Restriction
This page adds time of day restriction to a special LAN device connected to the Router. The 'Browser's MAC Address' automatically displays the MAC address of the LAN device where the browser is running. To restrict other LAN device, click the "Other MAC Address" button and enter the MAC address of the other LAN device. To find out the MAC address of a Windows based PC, go to command window and type "ipconfig /all".
User Name
Browser's MAC Address
00:05:5D:0C:56:E1
Other MAC Address
(xx:xx:xx:xx:xx:xx)
Days of the week
Mon Tue Wed Thu Fri Sat Sun
Click to select
Start Blocking Time (hh:mm)
End Blocking Time (hh:mm)
Save/Apply
Device Info
Advanced Setup
WAN
LAN
NAT
Security
IP Filtering
Parental Control
Quality of Service
Routing
DNS
DSL
Port Mapping
Certificate
Diagnostics
Management

Username:	To set access Internet user name
MAC:	To set what MAC to access Internet
Mon, Tue, Wed, Thu, Fri, Sat, Sun:	To set what day can be access Internet
Start, Stop:	To set time range for Internet Blocking

6.5 Quality of Service

To display the Security function, you need to enable the QoS feature in the WAN Setup.

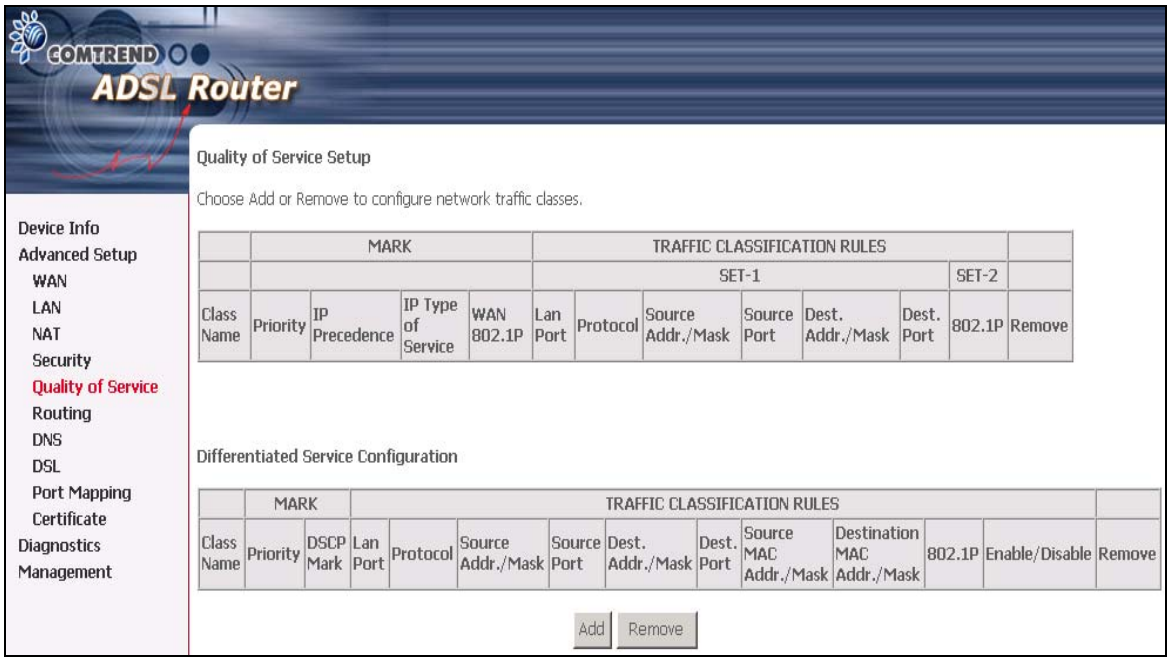

Choose Add to configure network traffic classes. The following screen will be displayed:

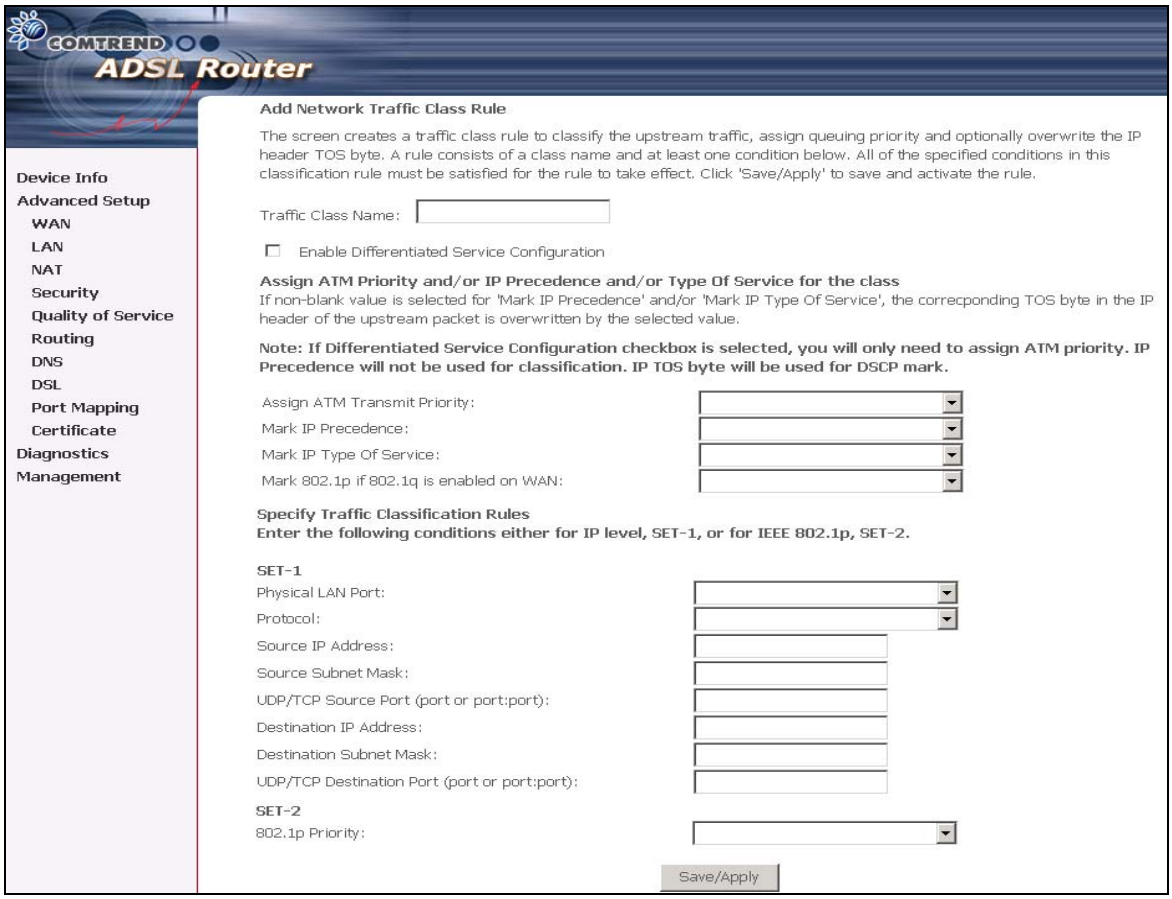
COMTREND
ADSL Router
Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
DNS
DSL
Port Mapping
Certificate
Diagnostics
Management
Add Network Traffic Class Rule
The screen creates a traffic class rule to classify the upstream traffic, assign queuing priority and optionally overwrite the IP header TOS byte. A rule consists of a class name and at least one condition below. All of the specified conditions in this classification rule must be satisfied for the rule to take effect. Click 'Save/Apply' to save and activate the rule.
Traffic Class Name:
Enable Differentiated Service Configuration
Assign ATM Priority and/or IP Precedence and/or Type Of Service for the class
If non-blank value is selected for 'Mark IP Precedence' and/or 'Mark IP Type Of Service', the correcponding TOS byte in the IP header of the upstream packet is overwritten by the selected value.
Note: If Differentiated Service Configuration checkbox is selected, you will only need to assign ATM priority. IP Precedence will not be used for classification. IP TOS byte will be used for DSCP mark.
Assign ATM Transmit Priority:
Mark IP Precedence:
Mark IP Type Of Service:
Mark 802.1p if 802.1q is enabled on WAN:
Specify Traffic Classification Rules
Enter the following conditions either for IP level, SET-1, or for IEEE 802.1p, SET-2.
SET-1
Physical LAN Port:
Protocol:
Source IP Address:
Source Subnet Mask:
UDP/TCP Source Port (port or port:port):
Destination IP Address:
Destination Subnet Mask:
UDP/TCP Destination Port (port or port:port):
SET-2
802.1p Priority:
Save/Apply

Traffic Class Name	Enter name for traffic class
Assign ATM Transmit Priority	Select Low, Medium or High.
Mark IP Precedence	Select between 1-7. The lower the digit shows the higher the priority
Mark IP Type Of Service	Select either: Normal Service, Minimize Cost, Maximize Reliability, Maximize Throughput, Minimize Delay
Mark 802.1p if 802.1q is enabled on WAN	Select between 1-7. The lower the digit shows the higher the priority
Physical LAN Port	User can select from: ENET, ENET(1-4), USB or Wireless.
Protocol	User can select from: TCP, TCP/UDP, UDP or ICMP.
Source IP Address	Enter the source IP address.
Source Subnet Mask	Enter the subnet mask for the source IP address.
UDP/TCP Source Port (port or port:port)	Enter source port number.
Destination IP address	Enter destination IP address.
Destination Subnet Mask	Enter destination subnet mask.
UDP/TCP Destination port (port or port:port)	Enter destination port number.
802.1p Priority	Select between 0-7. The lower the digit shows the higher the priority

6.6 Routing

The Routing dialog box allows you to configure Default gateway and Static Route.

6.6.1 Default Gateway

If '**Enable Automatic Assigned Default Gateway'** checkbox is selected, this router will accept the first received default gateway assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s). If the checkbox is not selected, enter the static default gateway AND/OR a WAN interface. Click 'Save/Apply' button to save it.

COMTREND
ADSL Router
Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
Default Gateway
Static Route
RIP
DNS
DSL
Port Mapping
Certificate
Diagnostics
Management
Routing -- Default Gateway
If Enable Automatic Assigned Default Gateway checkbox is selected, this router will accept the first received default gateway assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s). If the checkbox is not selected, enter the static default gateway AND/OR a WAN interface. Click 'Save/Apply' button to save it.
NOTE: If changing the Automatic Assigned Default Gateway from unselected to selected, You must reboot the router to get the automatic assigned default gateway.
Enable Automatic Assigned Default Gateway
Save/Apply

NOTE: If changing the Automatic Assigned Default Gateway from unselected to selected, You must reboot the router to get the automatic assigned default gateway.

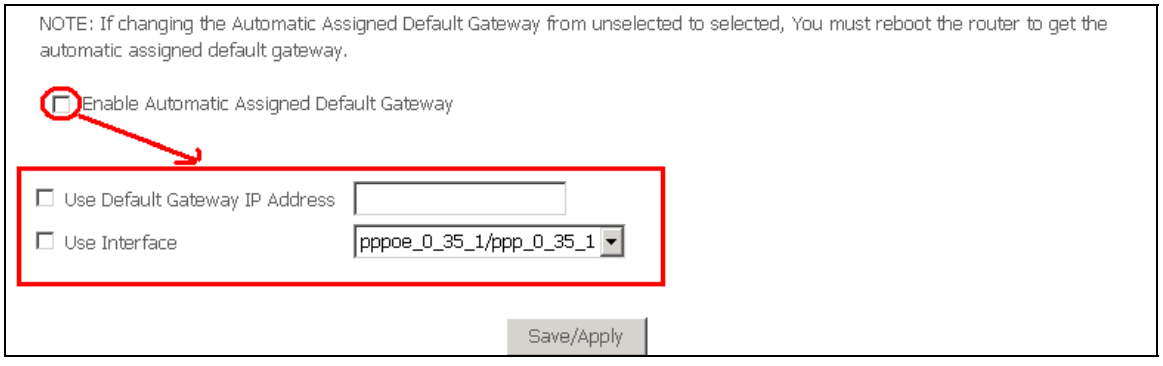
NOTE: If changing the Automatic Assigned Default Gateway from unselected to selected, You must reboot the router to get the automatic assigned default gateway.
Enable Automatic Assigned Default Gateway
Use Default Gateway IP Address
Use Interface
pppoe_0_35_1/ppp_0_35_1
Save/Apply

6.6.2 Static Route

Choose **Static Route** to display the Static Route screen. The Static Route screen lists the configured static routes, and allows configuring static routes. Choose **Add** or **Remove** to configure the static routes.

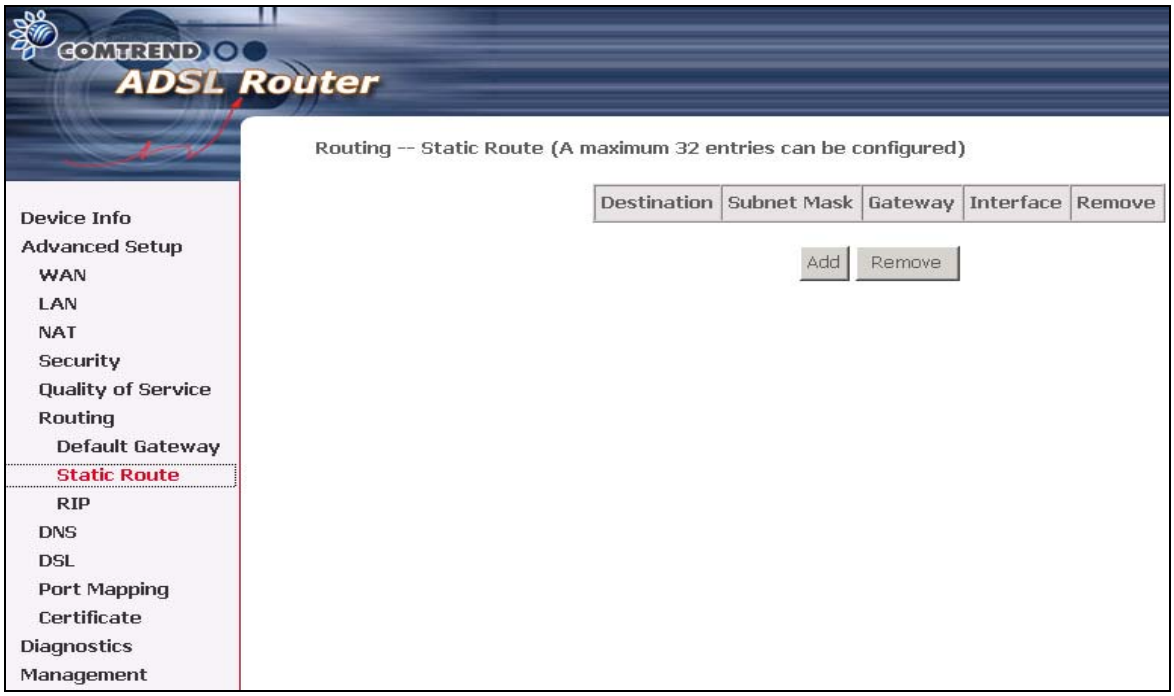

To add static route, click the **Add** button to display the following screen. Enter the destination network address, subnet mask, gateway AND/OR available WAN interface then click **Save/Apply** to add the entry to the routing table.

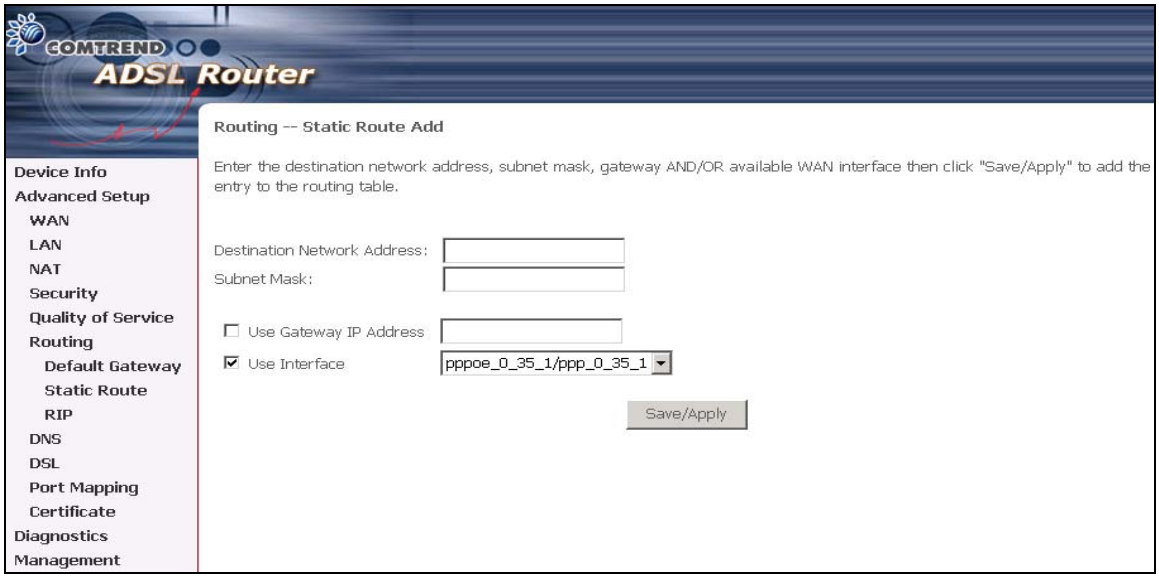

6.7 DNS

6.7.1 DNS Server

If 'Enable Automatic Assigned DNS' checkbox is selected, this router will accept the first received DNS assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s) during the connection establishment. If the checkbox is not selected, enter the primary and optional secondary DNS server IP addresses. Click 'Save' button to save the new configuration. You must reboot the router to make the new configuration effective.

COMTREND
ADSL Router
Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
DNS
DNS Server
Dynamic DNS
DSL
Diagnostics
Management
DNS Server Configuration
If 'Enable Automatic Assigned DNS' checkbox is selected, this router will accept the first received DNS assignment from one of the PPPoA, PPPoE or MER/DHCP enabled PVC(s) during the connection establishment. If the checkbox is not selected, enter the primary and optional secondary DNS server IP addresses. Click 'Save' button to save the new configuration. You must reboot the router to make the new configuration effective.
Enable Automatic Assigned DNS
Save

6.7.2 Dynamic DNS

The Dynamic DNS service allows you to map a dynamic IP address to a static hostname in any of the many domains, allowing your DSL router to be more easily accessed from various locations on the Internet.

To add a dynamic DNS service, simply click the Add button. The following screen will be displayed:

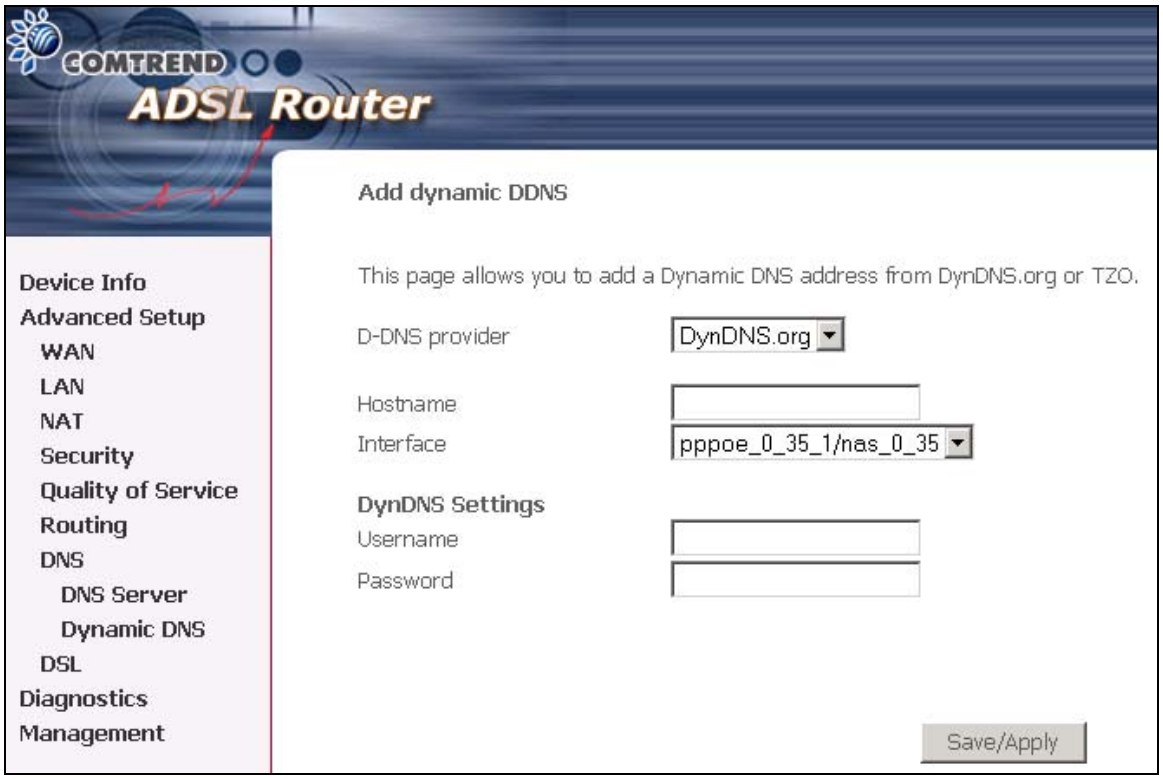

D-DNS provider	Select a dynamic DNS provider from the list
Hostname	Enter the name for the dynamic DNS server.
Interface	Select the interface from the list
Username	Enter the username for the dynamic DNS server.
Password	Enter the password for the dynamic DNS server.

6.8 DSL

To access the DSL settings, First click On **Advanced Setup** and then click on **DSL**. The DSL Settings dialog box allows you to select an appropriate modulation mode.

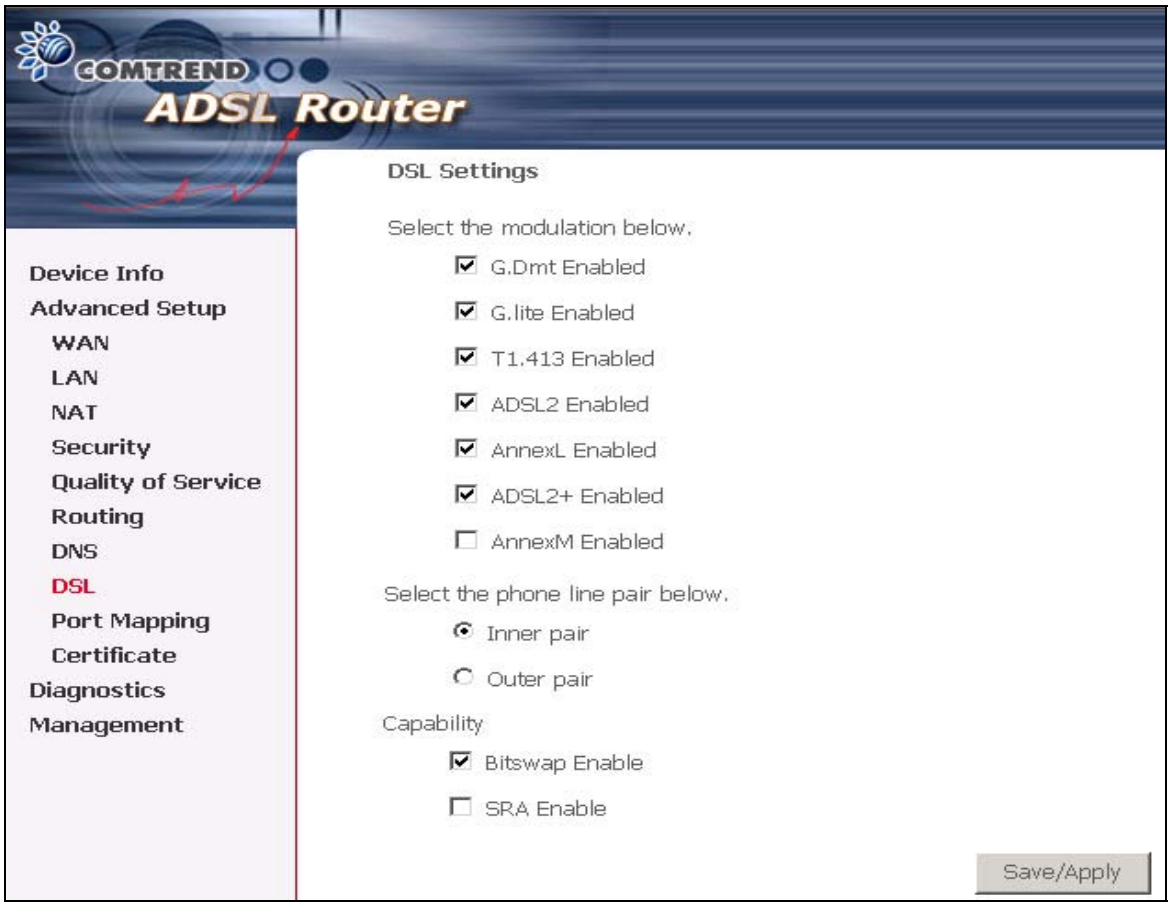

Option	Description
G.dmt Enabled	Sets G.Dmt if you want the system to use G.Dmt mode.
G.Lite Enabled	Sets G.Lite if you want the system to use G.Lite mode.
T1.413	Sets the T1.413 if you want the system to use only T1.413 mode.
ADSL2 Enabled	The device can support the functions of the ADSL2.
AnnexL Enabled	The device can support/enhance the long loop test.
ADSL2+ Enabled	The device can support the functions of the ADSL2+.
AnnexM	Covers a higher "upstream" data rate version, by making use of some of the downstream channels.
Inner Pair	Reserved only
Outer Pair	Reserved only
Bitswap Enable	Allows bitswaping function
SRA Enable	Allows seamless rate adaptation

6.9 Port Mapping

Port Mapping supports multiple ports to PVC and bridging groups. Each group will perform as an independent network. To support this feature, you must create mapping groups with appropriate LAN and WAN interfaces using the Add button. The Remove button will remove the grouping and add the ungrouped interfaces to the Default group.

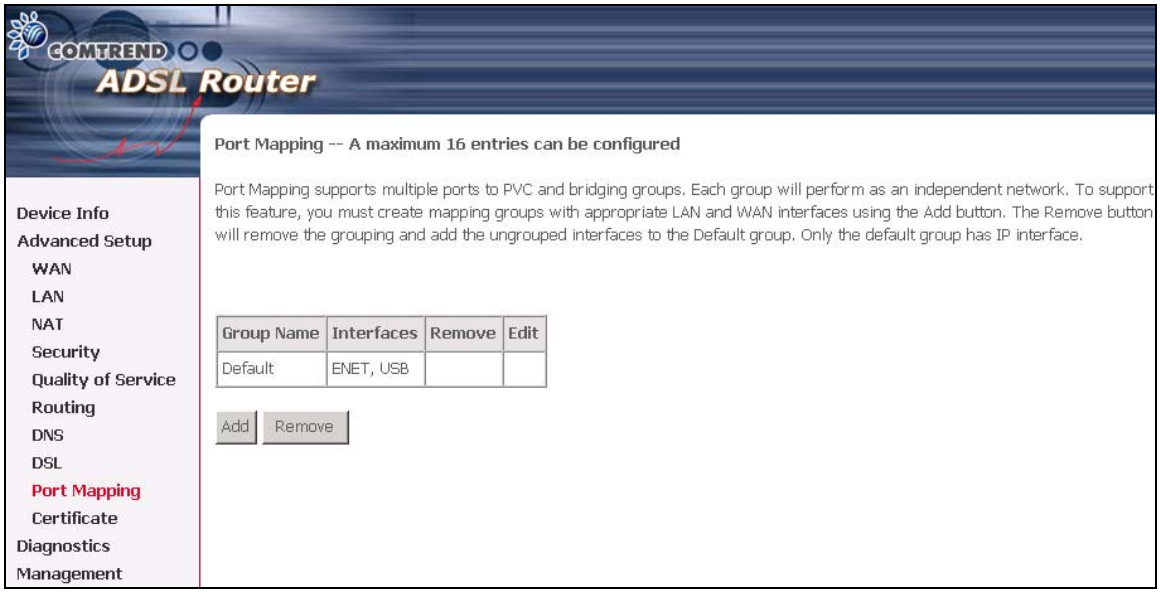

To add a port mapping group, simply click the Add button.

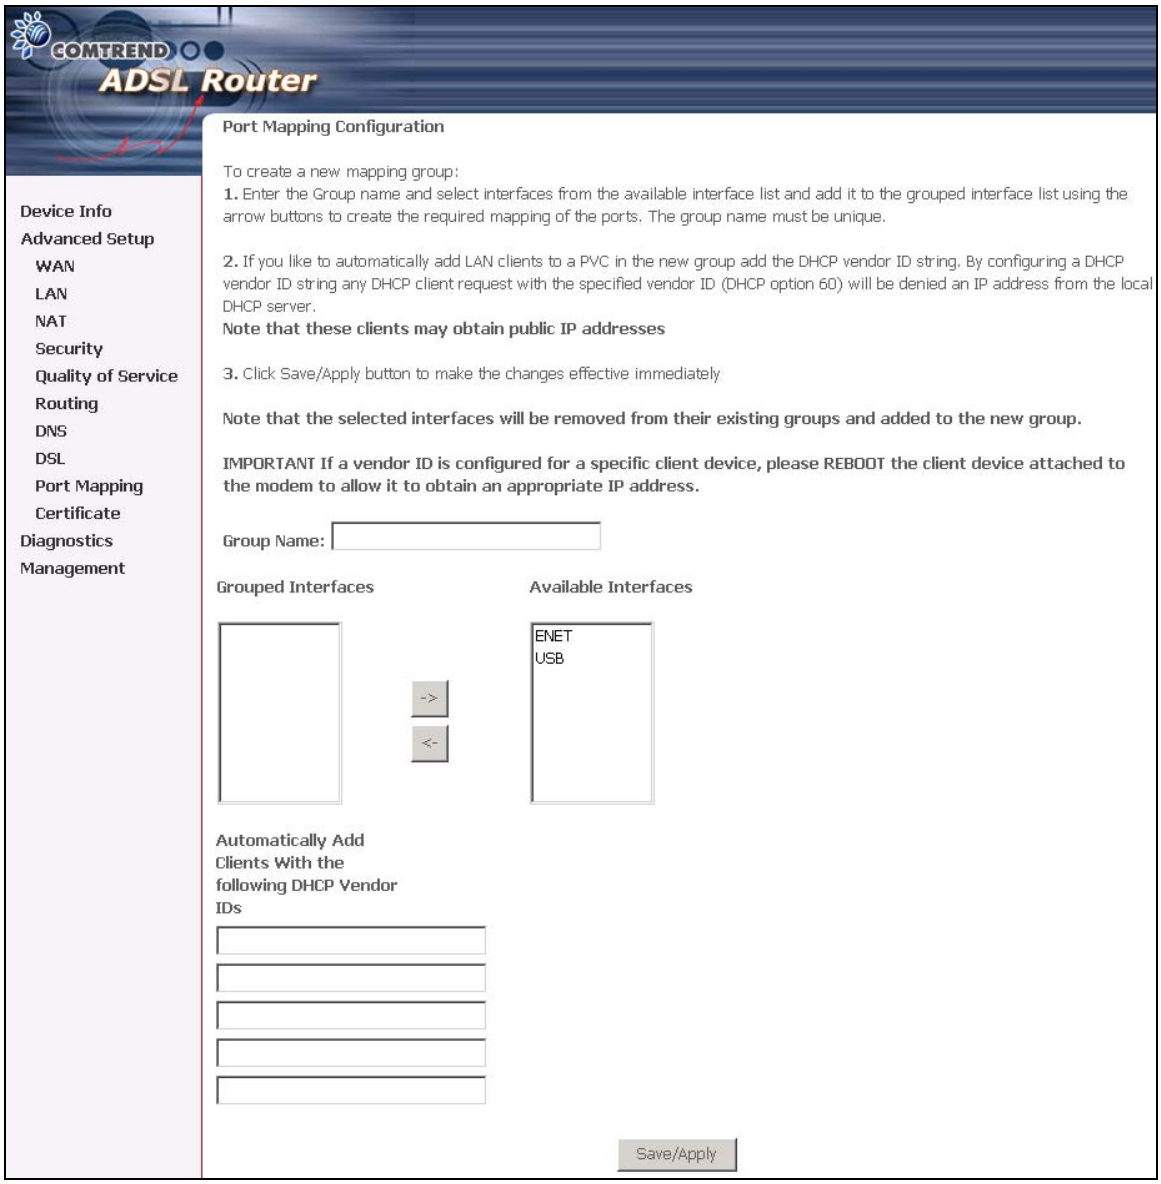
COMTREND
ADSL Router
Port Mapping Configuration
To create a new mapping group:
1. Enter the Group name and select interfaces from the available interface list and add it to the grouped interface list using the arrow buttons to create the required mapping of the ports. The group name must be unique.
2. If you like to automatically add LAN clients to a PVC in the new group add the DHCP vendor ID string. By configuring a DHCP vendor ID string any DHCP client request with the specified vendor ID (DHCP option 60) will be denied an IP address from the local DHCP server.
Note that these clients may obtain public IP addresses
3. Click Save/Apply button to make the changes effective immediately
Note that the selected interfaces will be removed from their existing groups and added to the new group.
IMPORTANT If a vendor ID is configured for a specific client device, please REBOOT the client device attached to the modem to allow it to obtain an appropriate IP address.
Device Info
Advanced Setup
WAN
LAN
NAT
Security
Quality of Service
Routing
DNS
DSL
Port Mapping
Certificate
Diagnostics
Management
Group Name:
Grouped Interfaces
Available Interfaces
ENET
USB
->
<-
Automatically Add Clients With the following DHCP Vendor IDs
Save/Apply

To create a group from the list, first enter the group name and then select from the available interfaces on the list.

Automatically Add Clients With the Following DHCP Vendor IDs:

Add support to automatically map LAN interfaces and USB to PVC's using DHCP vendor ID (option 60). The local DHCP server will decline and send the requests to a remote DHCP server by mapping the appropriate LAN interface. This will be turned on when Port Mapping is enabled.

There are 4 PVCs (0/33, 0/36, 0/37, 0/38). 0/33 is for PPPoE and the others are for IP setup-box (video).

The Lan interfaces are ETH and USB.
Port mapping configuration are:

1. Default : ENET and USB.
2. Video: nas_0_36, nas_0_37 and nas_0_38. The DHCP vendor ID is "Video".

The CPE's dhcp server is running on "Default". And ISP's dhcp server is running on PVC 0/36. It is for setup-box use only.

In the LAN side, PC can get IP address from CPE's dhcp server and access Internet via PPPoE (0/33).

If the setup-box was connected with interface "ENET" and send a dhcp request with vendor id "Video", CPE's dhcp server will forward this request to ISP's dhcp server. And CPE will change the port mapping configuration automatically. The portmapping configuration will become:

1. Default : ENET and USB.
2. Video: nas_0_36, nas_0_37, nas_0_38 and ENET.

6.10 Certificate

A certificate is a public key, attached with its owner's information (company name, server name, personal real name, contact e-mail, postal address, etc) and digital signatures. There will be one or more digital signatures attached on the certificate, indicating that these signers have verified that the owner information of this certificate is correct.

6.10.1 Local

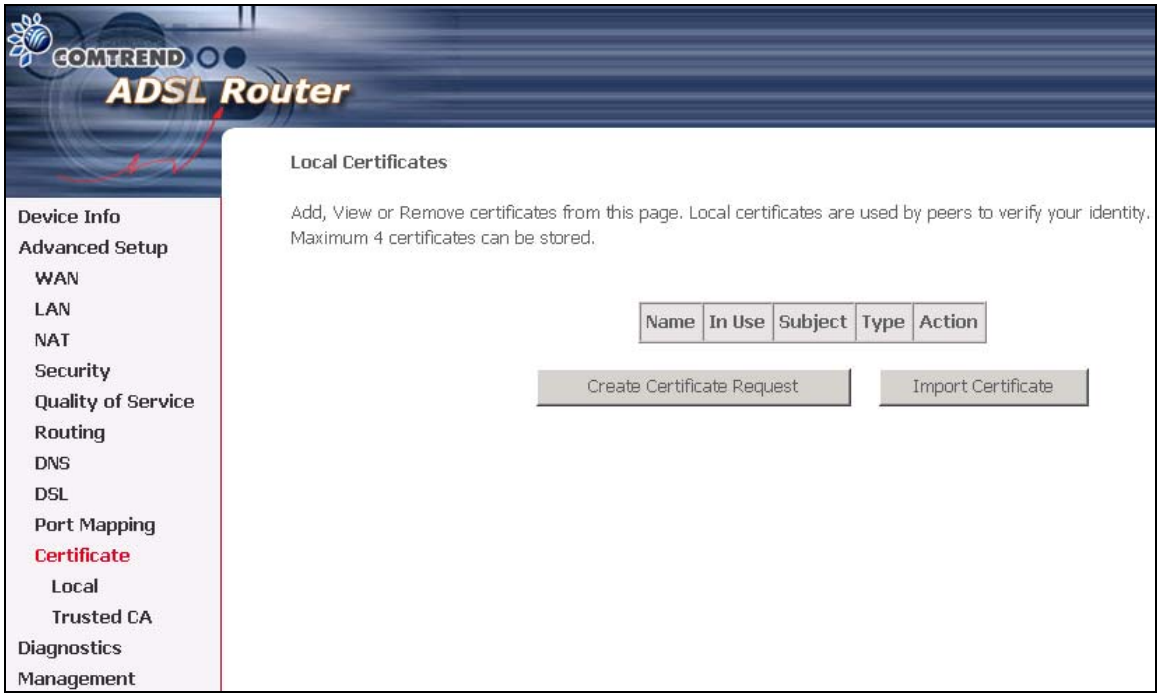

Click **Create Certificate Request** to generate a certificate signing request. The certificate signing request can be submitted to the vendor/ISP/ITSP to apply for a certificate. Some information must be included in the certificate signing request. Actually, your vendor/ISP/ITSP will ask you to provide the information they require and to provide the information in the format they regulate. The explanation for each column in the following table is only for reference.

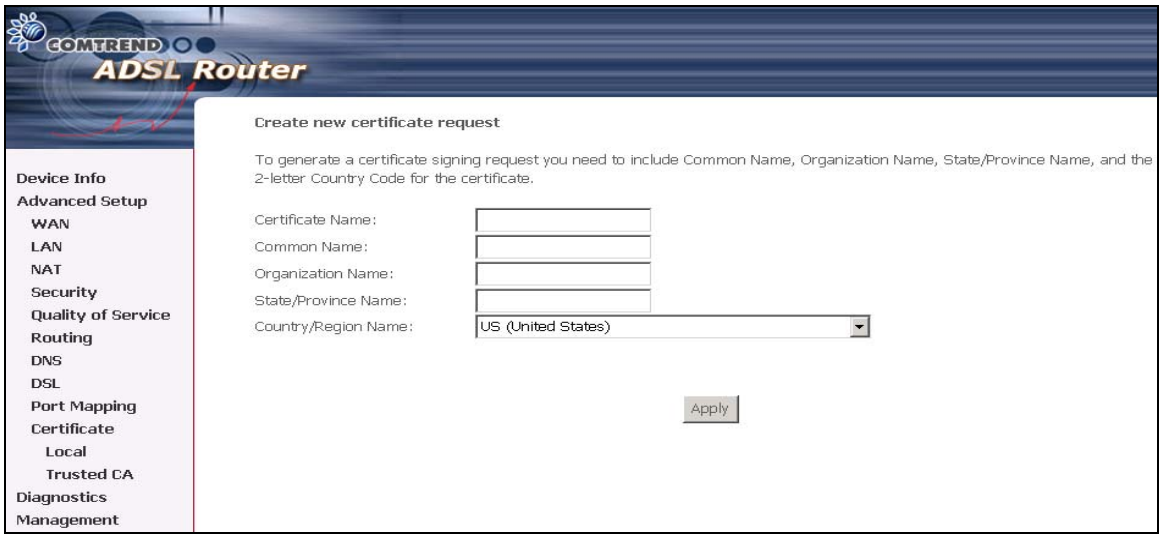

Click **Apply** to generate a private key and a certificate signing request.

Certificate Name	A user-defined name for the certificate.
Common Name	Usually, it is the fully qualified domain name for the machine.
Organization Name	The exact legal name of your organization. Do not abbreviate.
State/Province Name	The state or province where your organization is located. It cannot be abbreviated.
Country/Region Name	The two-letter ISO abbreviation for your country.

This page is used to paste the certificate content and the private key provided by your vendor/ISP/ITSP.

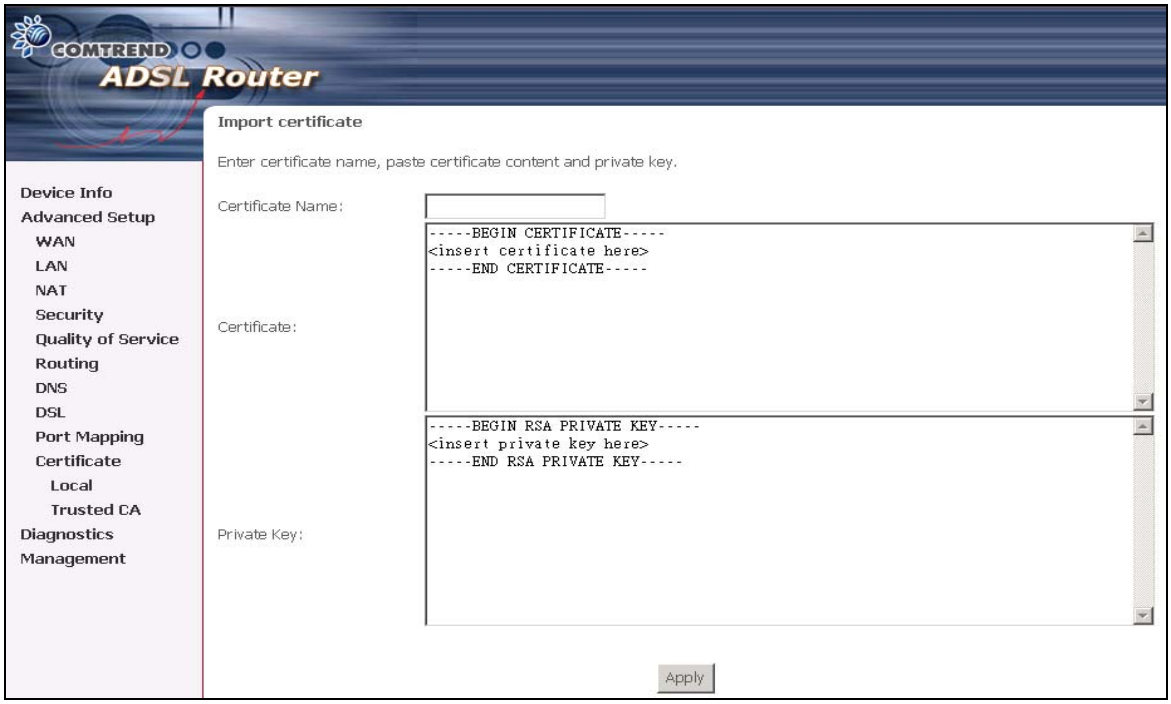

6.10.2 Trusted CA

CA is the abbreviation for Certificate Authority. CA is a part of the X.509 system. It is itself a certificate, attached with the owner information of this certificate authority. But its purpose is not to do encryption/decryption. Its purpose is to sign and issue certificates; in order to prove the owner information of that certificate is correct.

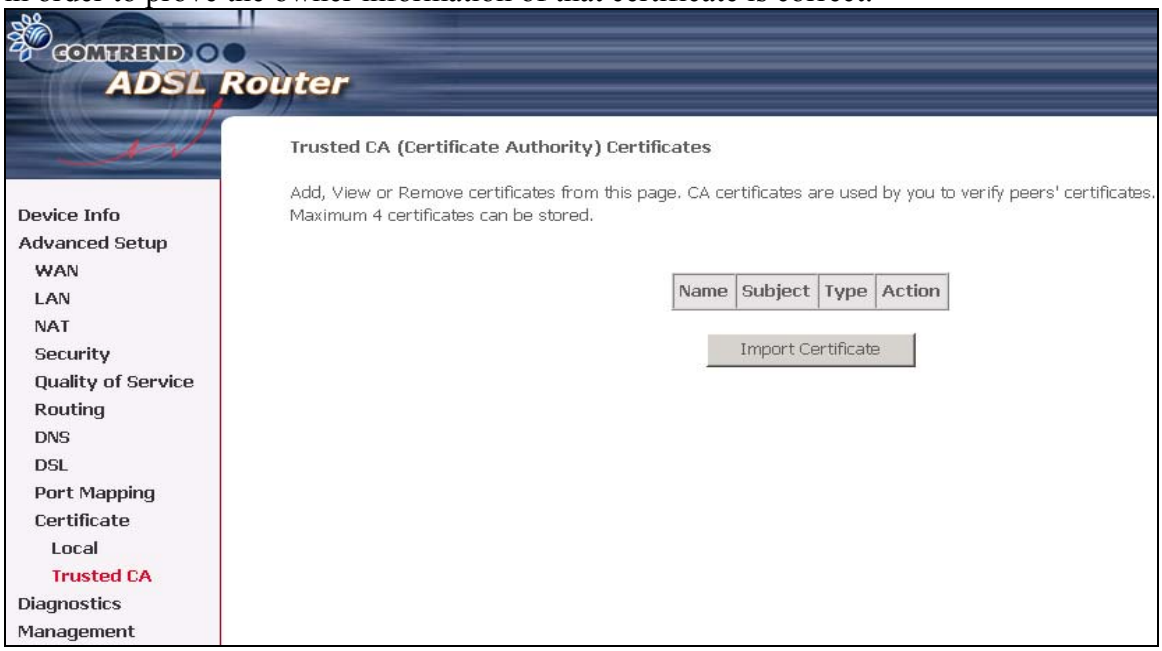

Click **Import Certificate** to paste the certificate content of your trusted CA. Generally speaking, the certificate content will be provided by your vendor/ISP/ITSP and is used to authenticate the Auto-Configuration Server (ACS) that the CPE will connect to.

Chapter 7 Diagnostics

The Diagnostics menu provides feedback on the connection status of the CT-5611T and the ADSL link. The individual tests are listed below. If a test displays a fail status, click **Rerun Diagnostic Tests** at the bottom of this page to make sure the fail status is consistent. If the test continues to fail, click **Help** and follow the troubleshooting procedures.

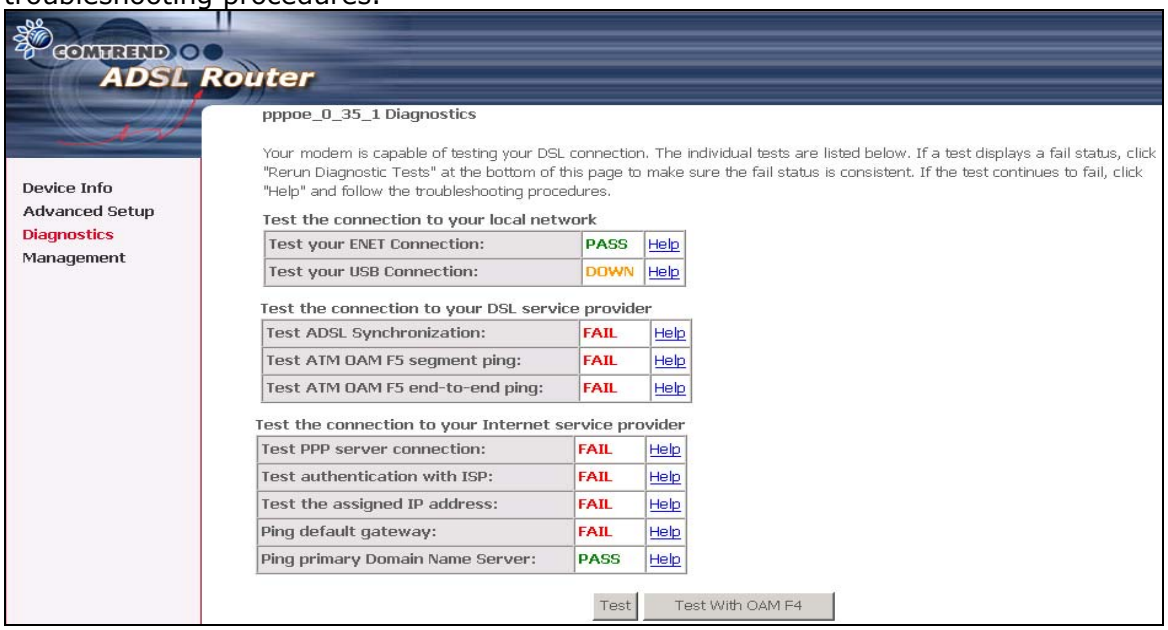
COMTREND
ADSL Router
Device Info
Advanced Setup
Diagnostics
Management
pppoe_0_35_1 Diagnostics
Your modem is capable of testing your DSL connection. The individual tests are listed below. If a test displays a fail status, click "Rerun Diagnostic Tests" at the bottom of this page to make sure the fail status is consistent. If the test continues to fail, click "Help" and follow the troubleshooting procedures.
Test the connection to your local network
Test your ENET Connection: PASS Help
Test your USB Connection: DOWN Help
Test the connection to your DSL service provider
Test ADSL Synchronization: FAIL Help
Test ATM OAM F5 segment ping: FAIL Help
Test ATM OAM F5 end-to-end ping: FAIL Help
Test the connection to your Internet service provider
Test PPP server connection: FAIL Help
Test authentication with ISP: FAIL Help
Test the assigned IP address: FAIL Help
Ping default gateway: FAIL Help
Ping primary Domain Name Server: PASS Help
Test
Test With OAM F4

Test	Description
Ethernet Connection	**Pass:** indicates that the Ethernet interface from your computer is connected to the LAN port of your DSL Router. A flashing or solid green LAN LED on the router also signifies that an Ethernet connection is present and that this test is successful. **Fail:** Indicates that the DSL Router does not detect the Ethernet interface on your computer.
USB connection	**Pass:** Indicates that the USB interface from your computer is connected to the LAN port of your DSL router. **Down:** Indicates that the DSL Router does not detect the USB interface on your computer.
ADSL Synchronization	**Pass:** Indicates that the DSL modem has detected a DSL signal from the telephone company. A solid WAN LED on the router also indicates the detection of a DSL signal from the telephone company. **Fail:** indicates that the DSL modem does not detect a signal from the telephone company's DSL network. The WAN LED will continue to flash green.
ISP Connection	**Pass:** Indicates we can access the WAN service like the Gateway and DNS. **Fail:** Indicates we cannot access the WAN side.

Chapter 8 Management

The Management section of the CT-5611T supports the following maintenance functions and processes:

- Settings
- System log
- TR-069 Client
- Internet Time
- Access Control
- Update software
- Save/Reboot

8.1 Settings

The Settings option allows you to back up your settings to a file, retrieve the setting file, and restore the settings.

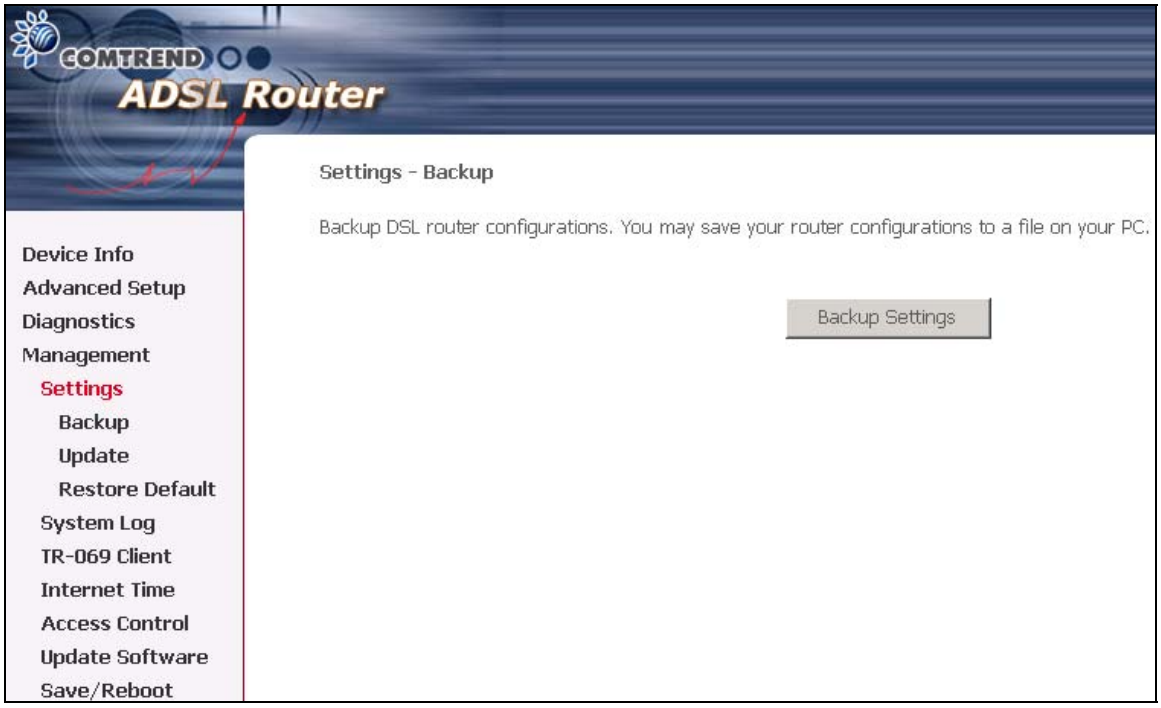

8.1.1 Configuration Backup

The Backup option under Management>Settings, save your router configurations to a file on your PC. Click BACKUP Settings in the main window. You will be prompted to define the location of the backup file to save. After choosing the file location, click **Backup Settings.** Te file will then be saved to the assigned location.

8.1.2 Tools – Update Settings

The Update option under Management>Settings update your router settings using your saved files.

8.1.3 Restore Default

Clicking the Restore Default Configuration option in the Restore Settings screen can restore the original factory installed settings.

NOTE: This entry has the same effect as the hardware reset-to-default button. The CT-5611T board hardware and the boot loader support the **reset to default** button. If the reset button is continuously pushed for more than 5 seconds, the boot loader will erase the entire configuration data saved on the flash memory.

NOTE: Restoring system settings, requires a system reboot. This necessitates that the current Web UI session be closed and restarted. Before restarting, the connected PC must be configured with a static IP address in the 192.168.1.x subnet in order to configure the CT-5611T.

Default settings
The CT-5611T default settings are

- LAN port IP= 192.168.1.1, subnet mask = 255.255.255.0
- Local user name: root
- Password: 12345
- Remote user name: support
- Remote user password: support

After the Restore Default Configuration button is selected, the following screen appears. Close the DSL Router Configuration window and wait for 2 minutes before reopening your web browser. If necessary, reconfigure your PC's IP address to match your new configuration.

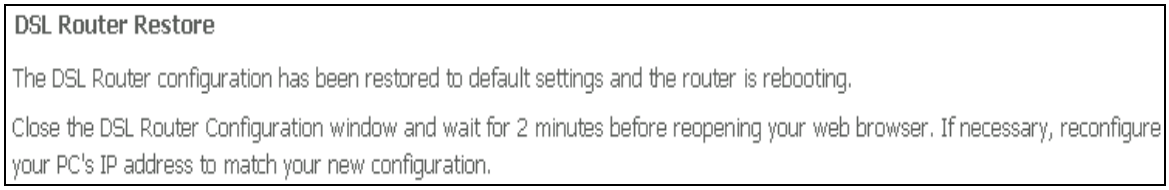
DSL Router Restore
The DSL Router configuration has been restored to default settings and the router is rebooting.
Close the DSL Router Configuration window and wait for 2 minutes before reopening your web browser. If necessary, reconfigure your PC's IP address to match your new configuration.

8.2 System Log

The System Log option under Management>Settings allows you to view the system events log, or to configure the System Log options. The default setting of system log is disabled. Follow the steps below to enable and view the system log.

1. Click **Configure System Log** to display the following screen.

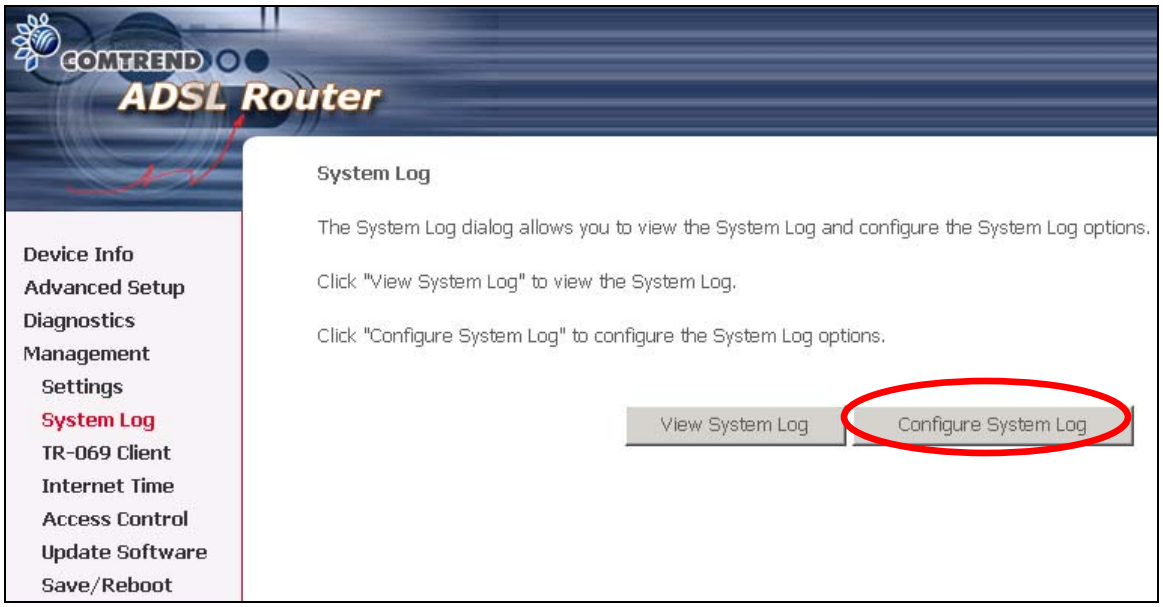

2. Select from the desired Log options described in the following table, and then click **Save/Apply**.

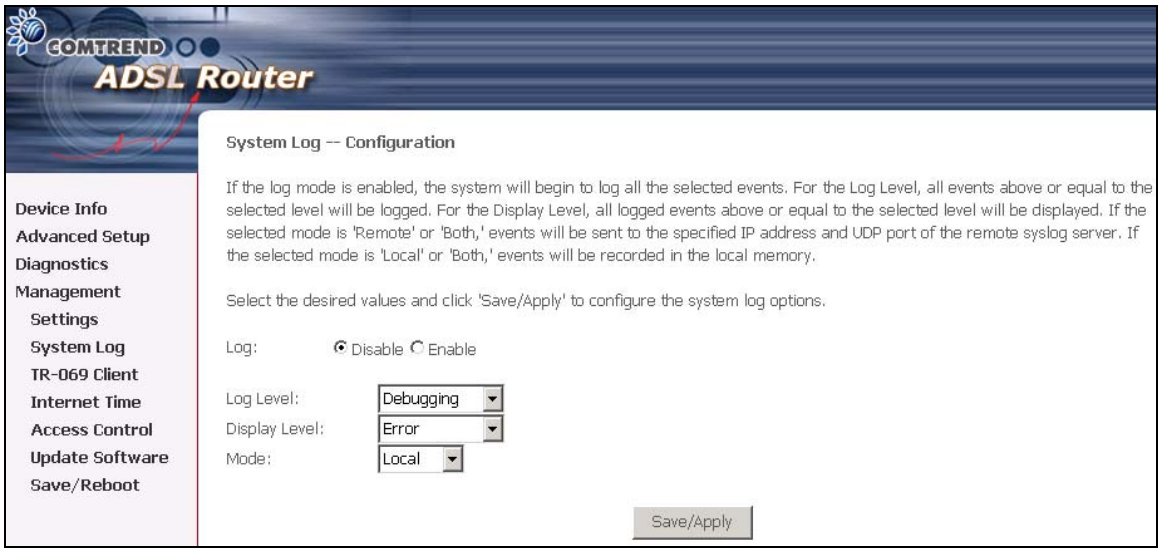
COMTREND
ADSL Router
Device Info
Advanced Setup
Diagnostics
Management
Settings
System Log
TR-069 Client
Internet Time
Access Control
Update Software
Save/Reboot
System Log -- Configuration
If the log mode is enabled, the system will begin to log all the selected events. For the Log Level, all events above or equal to the selected level will be logged. For the Display Level, all logged events above or equal to the selected level will be displayed. If the selected mode is 'Remote' or 'Both,' events will be sent to the specified IP address and UDP port of the remote syslog server. If the selected mode is 'Local' or 'Both,' events will be recorded in the local memory.
Select the desired values and click 'Save/Apply' to configure the system log options.
Log: Disable Enable
Log Level: Debugging
Display Level: Error
Mode: Local
Save/Apply

Option	Description
Log	Indicates whether the system is currently recording events. The user can enable or disable event logging. By default, it is disabled. To enable it, tick Enable and then Apply button.
Log level	Allows you to configure the event level and filter out unwanted events below this level. The events ranging from the highest critical level "Emergency" down to this configured level will be recorded to the log buffer on the CT-5611T SDRAM. When the log buffer is full, the newer event will wrap up to the top of the log buffer and overwrite the old event. By default, the log level is "Debugging," which is the lowest critical level. The following log levels are ● Emergency = system is unusable ● Alert = action must be taken immediately ● Critical = critical conditions ● Error = Error conditions ● Warning = normal but significant condition ● Notice= normal but insignificant condition ● Informational= provides information for reference ● Debugging = debug-level messages Emergency is the most serious event level, whereas Debugging is the least important. For instance, if the log level is set to Debugging, all the events from the lowest Debugging level to the most critical level Emergency level will be recorded. If the log level is set to Error, only Error and the level above will be logged.
Display Level	Allows the user to select the logged events and displays on the **View System Log** page for events of this level and above to the highest Emergency level.
Mode	Allows you to specify whether events should be stored in the local memory, or be sent to a remote syslog server, or both simultaneously. If remote mode is selected, view system log will not be able to display events saved in the remote syslog server. When either Remote mode or Both mode is configured, the WEB UI will prompt the user to enter the Server IP address and Server UDP port.

3. Click **View System Log**. The results are displayed as follows.

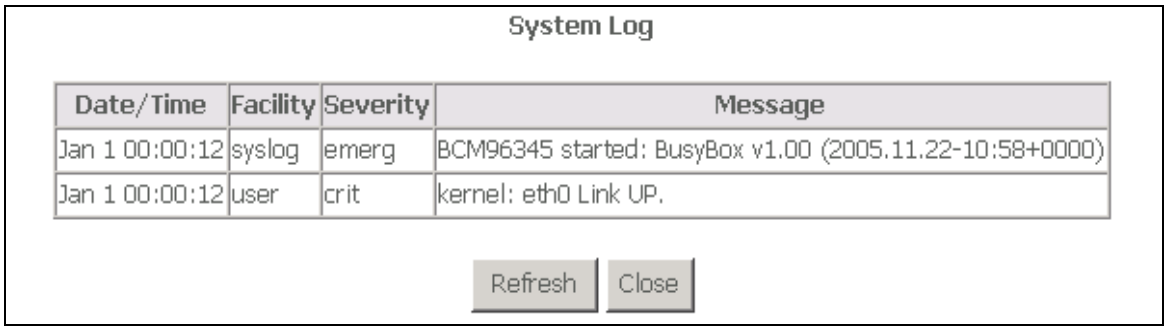

8.3 TR-069 Client

WAN Management Protocol (TR-069) allows a Auto-Configuration Server (ACS) to perform auto-configuration, provision, collection, and diagnostics to this device.

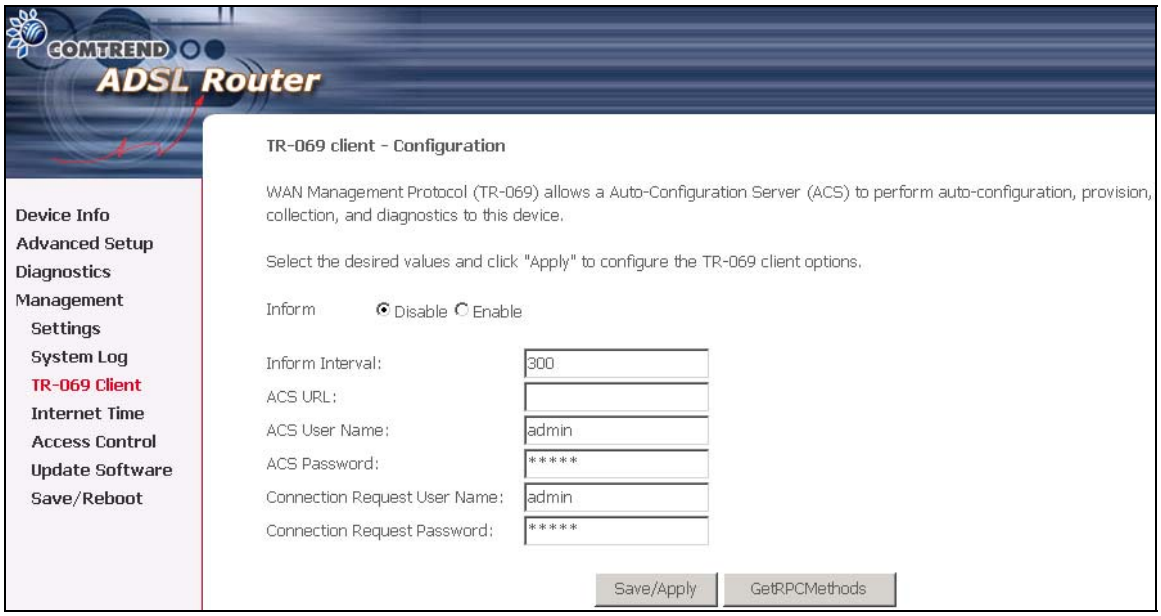

Option	Description
Inform	Disable/Enable TR-069 client on the CPE.
Inform Interval	The duration in seconds of the interval for which the CPE MUST attempt to connect with the ACS and call the Inform method.
ACS URL	URL for the CPE to connect to the ACS using the CPE WAN Management Protocol. This parameter MUST be in the form of a valid HTTP or HTTPS URL. An HTTPS URL indicates that the ACS supports SSL. The “host” portion of this URL is used by the CPE for validating the certificate from the ACS when using certificate-based authentication.
ACS User Name	Username used to authenticate the CPE when making a connection to the ACS using the CPE WAN Management Protocol. This username is used only for HTTP-based authentication of the CPE.
ACS Password	Password used to authenticate the CPE when making a connection to the ACS using the CPE WAN Management Protocol. This password is used only for HTTP-based authentication of the CPE.
Connection Request User Name	Username used to authenticate an ACS making a Connection Request to the CPE.
Connection Request Password	Password used to authenticate an ACS making a Connection Request to the CPE.

Get RPC Methods	This method may be used by a CPE or ACS to discover the set of methods supported by the ACS or CPE it is in communication with. This list may include both standard TR-069 methods (those defined in this specification or a subsequent version) and vendor-specific methods. The receiver of the response MUST ignore any unrecognized methods. Click this button to force the CPE to immediately establish a connection to the ACS.

8.4 Internet Time

The Internet Time option under Management menu bar configures the Modem's time. To automatically synchronize with Internet timeservers, tick the corresponding box displayed on the screen. Then click **Save/Apply**.

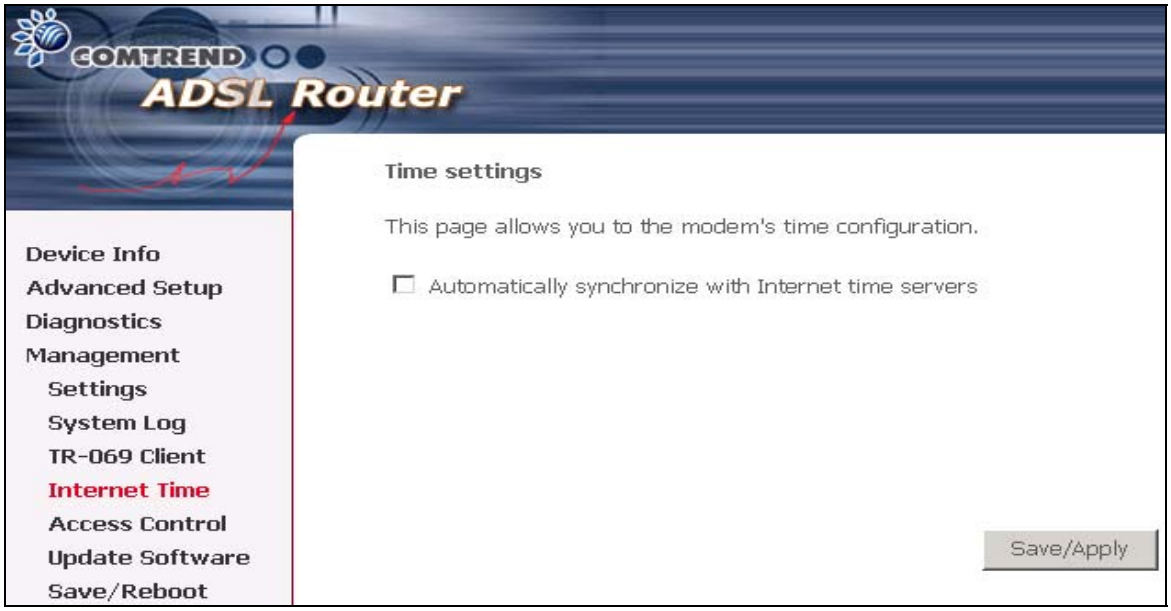

8.5 Access Control

The Access Control option under Management menu bar configures the access-related parameters, including three parts: Services, IP Address, and Passwords.

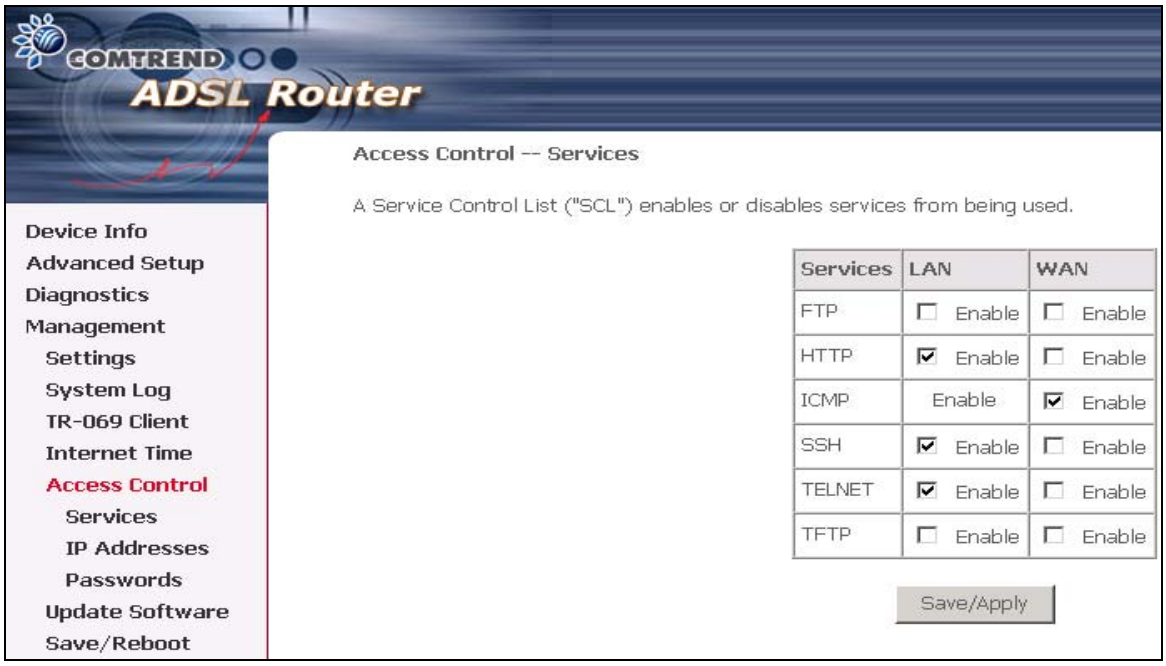

Note: LAN and WAN side are present on the screen if the WAN interface is UP. Only the LAN side will be displayed if the ADSL or WAN interface is down.

8.5.1 Services

The Services option limits or opens the access services over the LAN or WAN. These services are provided FTP, HTTP, ICMP, SNMP, SSH (Security Socket Share), TELNET, and TFTP. Enable the service by checking the item in the corresponding checkbox, and then click **Save/Apply**.

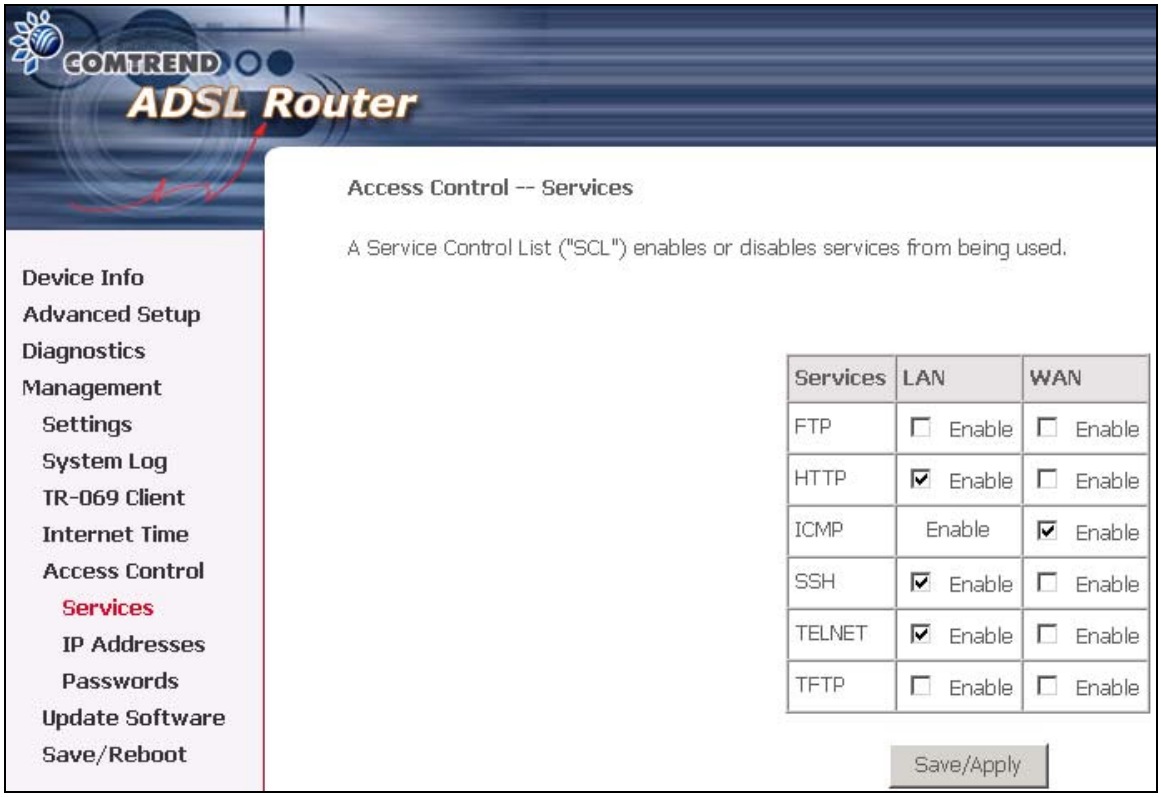

8.5.2 Access IP Addresses

The IP Addresses option limits the access by IP address. If the Access Control Mode is enabled, only the allowed IP addresses can access the router. Before you enable it, configure the IP addresses by clicking the **Add** button. Enter the IP address and click **Apply** to allow the PC with this IP address managing the DSL Router.

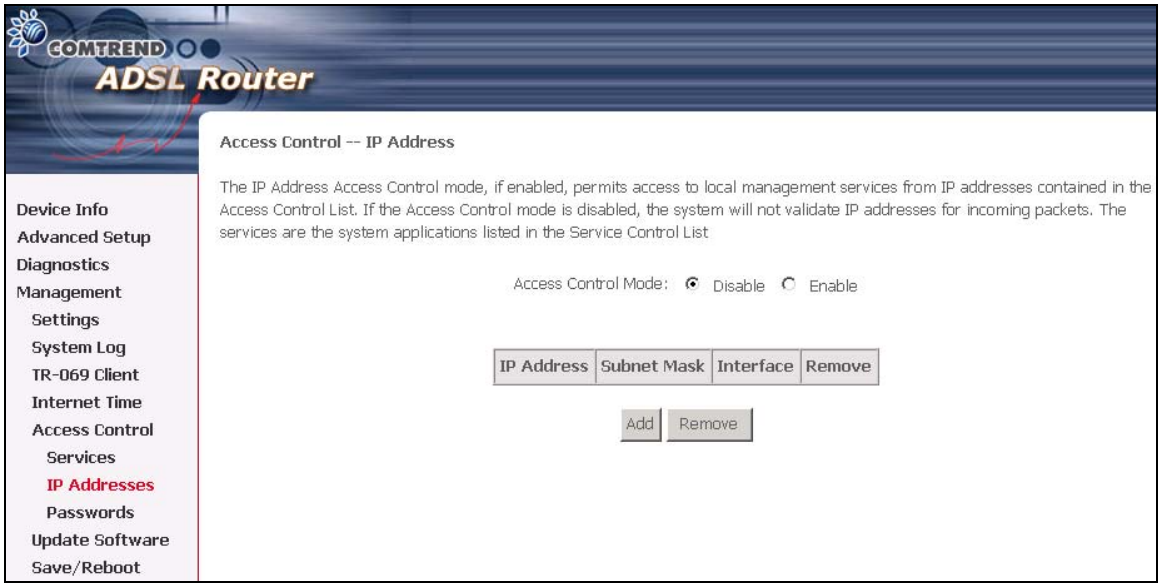

8.5.3 Passwords

The Passwords option configures the access passwords for the router. Access to your DSL router is controlled through three user accounts: admin, support, and user.

- "root" has unrestricted access to change and view configuration of your DSL Router.
- "support" is used to allow an ISP technician to access your DSL Router for maintenance and to run diagnostics.
- "user" can access the Router, view configuration settings and statistics, as well as, update the router's software.

Use the fields below to enter up to 16 characters and click Apply to change or create passwords.

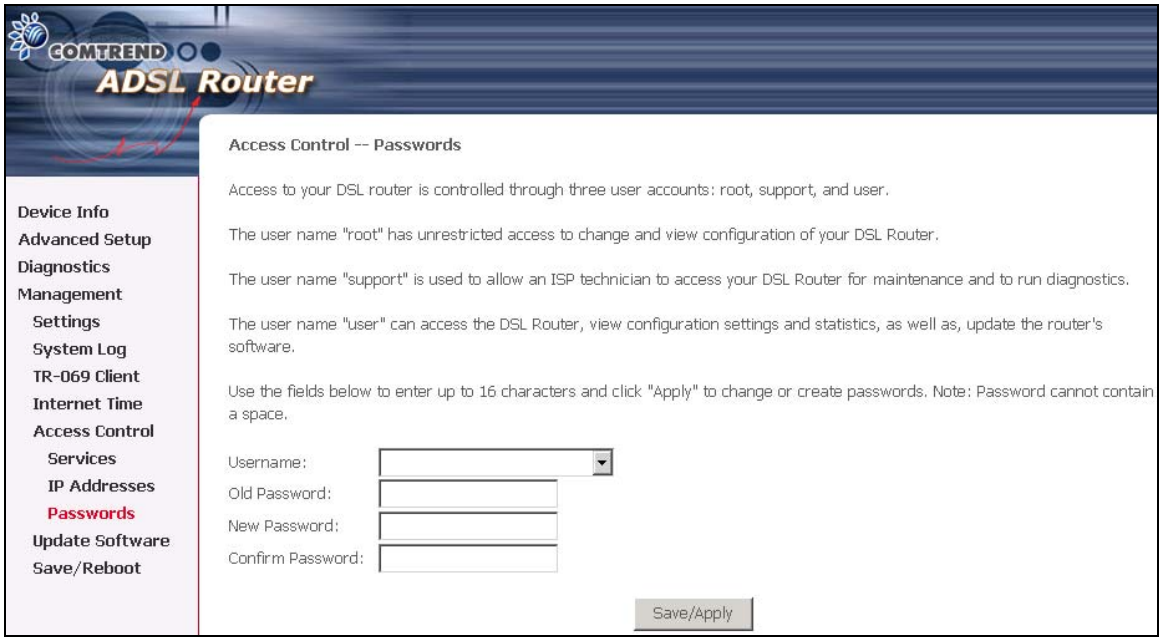
COMTREND
ADSL Router
Device Info
Advanced Setup
Diagnostics
Management
Settings
System Log
TR-069 Client
Internet Time
Access Control
Services
IP Addresses
Passwords
Update Software
Save/Reboot
Access Control -- Passwords
Access to your DSL router is controlled through three user accounts: root, support, and user.
The user name "root" has unrestricted access to change and view configuration of your DSL Router.
The user name "support" is used to allow an ISP technician to access your DSL Router for maintenance and to run diagnostics.
The user name "user" can access the DSL Router, view configuration settings and statistics, as well as, update the router's software.
Use the fields below to enter up to 16 characters and click "Apply" to change or create passwords. Note: Password cannot contain a space.
Username:
Old Password:
New Password:
Confirm Password:
Save/Apply

8.6 Update Software

The Update Software screen allows you to obtain an updated software image file from your ISP. Manual software upgrades from a locally stored file can be performed using the following screen.

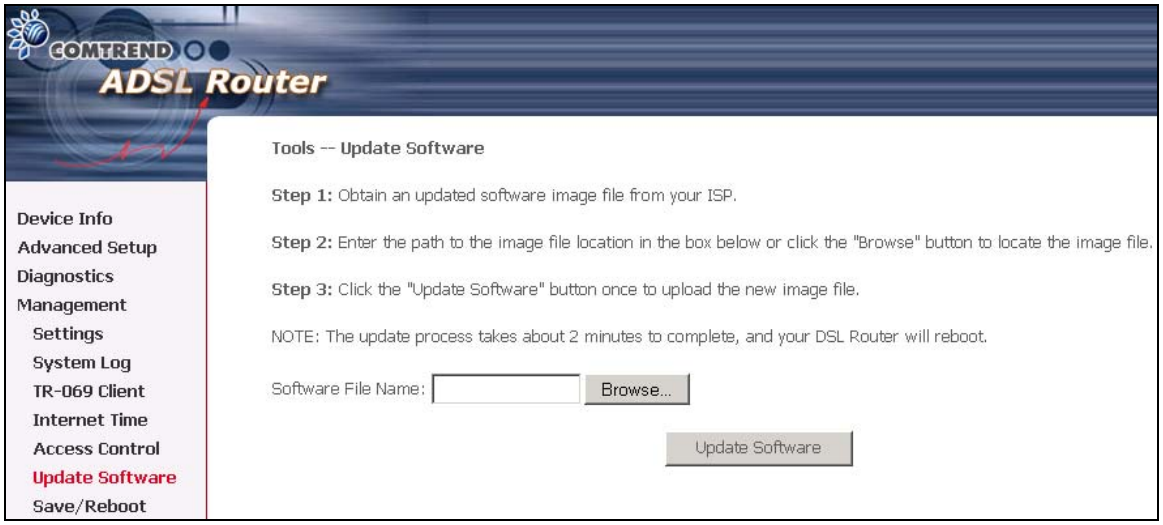
COMTREND
ADSL Router
Device Info
Advanced Setup
Diagnostics
Management
Settings
System Log
TR-069 Client
Internet Time
Access Control
Update Software
Save/Reboot
Tools -- Update Software
Step 1: Obtain an updated software image file from your ISP.
Step 2: Enter the path to the image file location in the box below or click the "Browse" button to locate the image file.
Step 3: Click the "Update Software" button once to upload the new image file.
NOTE: The update process takes about 2 minutes to complete, and your DSL Router will reboot.
Software File Name:
Browse...
Update Software

Step 1: Obtain an updated software image file from your ISP.

Step 2: Enter the path to the image file location in the box below or click the **Browse** button to locate the image file.

Step 3: Click the "Update Software" button once to upload the new image file.

NOTE: The update process takes about 2 minutes to complete, and your DSL Router will reboot.

8.7 Save and Reboot

The Save/Reboot option saves the configurations and reboots the router. Close the DSL Router Configuration window and wait for 2 minutes before reopening your web browser. If necessary, reconfigure your PC's IP address to match your new configuration.

Appendix A: Pin Assignments

Line port (RJ11)

Pin	Definition	Pin	Definition
1	-	4	ADSL_TIP
2	-	5	-
3	ADSL_RING	6	-

Pin Assignments of the RJ11 Port

LAN Port (RJ45)

Pin	Definition	Pin	Definition
1	Transmit data+	5	NC
2	Transmit data-	6	Receive data-
3	Receive data+	7	NC
4	NC	8	NC

Pin assignments of the LAN Port

Appendix B: Specifications

Rear Panel

RJ-11 X1 for ADSL, RJ-45 X 1 for LAN, USB X 1 for LAN, Reset Button X 1, Power switch X 1

ADSL

Standard ITU-T G.992.5, ITU-T G.992.3, ITU-T G.992.1, ANSI T1.413 Issue 2

G.992.5 (ADSL2+)	Downstream : 24 Mbps	Upstream : 1.3 Mbps
G.992.3 (ADSL2)	Downstream : 12 Mbps	Upstream : 1.3 Mbps
G.DMT	Downstream: 8 Mbps	Upstream: 832 Kbps

Ethernet

Standard	IEEE 802.3, IEEE 802.3u
10/100 BaseT	Auto-sense
MDI/MDIX	Yes

ATM Attributes

RFC 2364 (PPPoA), RFC 2684 (RFC 1483) Bridge/Route; RFC 2516 (PPPoE); RFC 1577 (IPoA)

Support PVCs	8
AAL type	AAL5
ATM service class	UBR/CBR/VBR
ATM UNI support	UNI3.1/4.0
OAM F4/F5	Yes

Management

TR-069, SNMP, Telnet, Web-based management, Configuration backup and restoration

Software upgrade via HTTP, TFTP server, or FTP server

Bridge Functions

Transparent bridging and learning	IEEE 802.1d
Spanning Tree Algorithm	Yes
IGMP Proxy	Yes

Routing Functions

Static route, NAT/PAT, DHCP Server/DHCP Relay, DNS Proxy, ARP

Security Functions

Authentication protocols PAP, CHAP,

TCP/IP/Port filtering rules, Port triggering/Forwarding, Packet and MAC address filtering, access control,

Application Passthrough

PPTP, L2TP, IPSec, VoIP, Yahoo messenger, ICQ, RealPlayer, NetMeeting, MSN, X-box, etc.

Power Supply

External power adapter	110 Vac or 220 Vac

Environment Condition

Operating temperature	0 ~ 50 degrees Celsius
Relative humidity	5 ~ 95% (non-condensing)

Dimensions

114 mm (W) x 32 mm (H) x 92 mm (D)

Certifications

FCC Part 15 class B, FCC Part 68, CE

Note: Specifications are subject to change without notice